

HSP

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze or Brass
 Contact plating: Au or Sn over Ni
 Insulator Material: PBT or PA6T+30%G. F UL94V-0

Ordering Information

2185DN X-2 XX S XX X YN X 1




Add number
 l-flps

No. of Pins per
 ROW: 02-40PIN

Contact Plating:
 G0=Gold Flash
 G1=3μ"Gold
 G2=5μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tm
 S1=3μ"Gold/Tm
 S2=5μ"Gold/Tm
 S3=10μ"Gold/Tm
 S4=15μ"Gold/Tm
 S5=30μ"Gold/Tm
 SN=Tm

Packing:
 A=PBT
 C=PA6T

Packing:
 T=Tube
 A=Tray

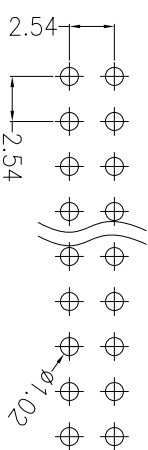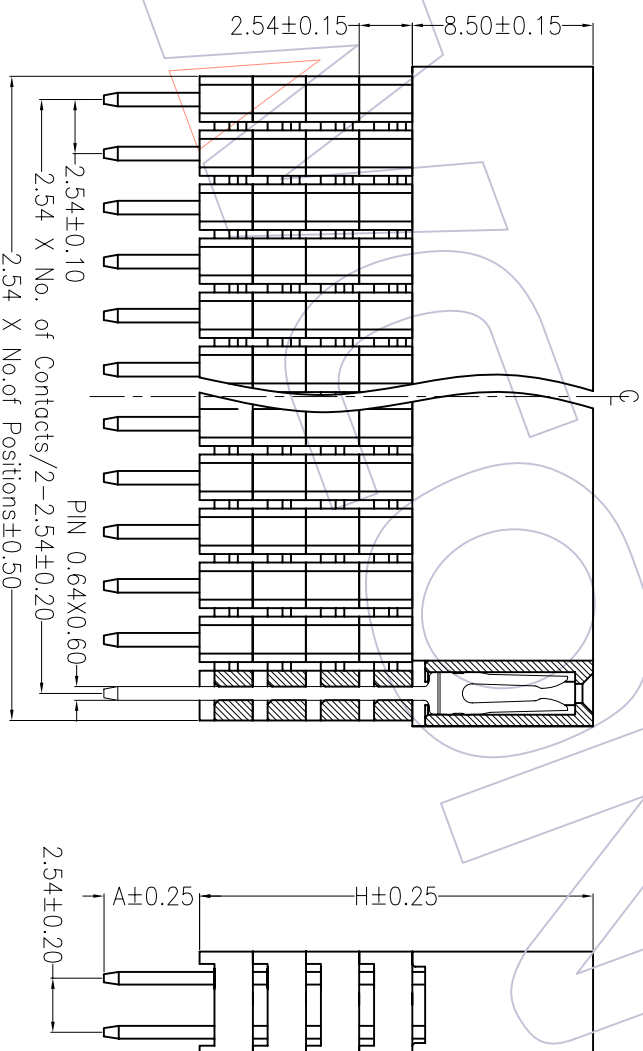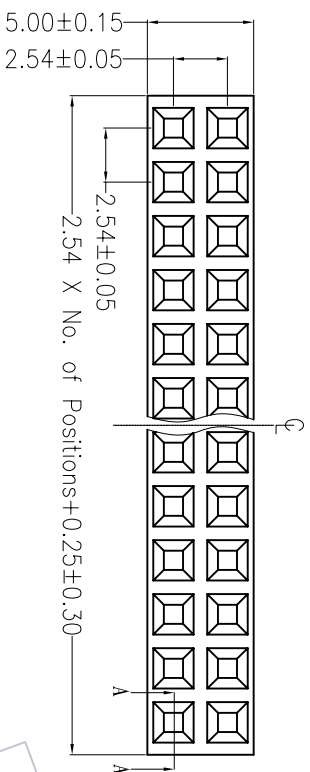

Recommended P.C.B. Layout(TOP Side)
 (PCB BOARD TOLERANCE±0.05)

SECTION A-A

Dimension antitheses list					
PART NO.	Add Number	Dim H	Dim A	Dim B	Dim C
2185DN1-2XXX	1	11.05	12.2	2.30	2.30
2185DN2-2XXX	2	13.59	4.85	2.85	2.85
2185DN3-2XXX	3	16.13	7.10	4.85	7.10
2185DN4-2XXX	4	18.67	4.60	7.10	4.60

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

OPERATION	DRAW	WEIXD	SCALE
X.X		08.03.28	3:1
±0.40	DESIGN		UNIT
±0.25	CHECK		mm
±0.15			SIZE
± 3'	APPROVE		A4
			SHEET
			1/1
			TITLE:
			Customer NO.

增加两款DIP尺寸规格

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A1	08/03/28			
A0	08/03/13	NEW		

OPERATION	DRAW	WEIXD	SCALE
X.X		08.03.28	3:1
±0.40	DESIGN		UNIT
±0.25	CHECK		mm
±0.15			SIZE
± 3'	APPROVE		A4
			SHEET
			1/1
			TITLE:
			Customer NO.

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

OPERATION	DRAW	WEIXD	SCALE
X.X		08.03.28	3:1
±0.40	DESIGN		UNIT
±0.25	CHECK		mm
±0.15			SIZE
± 3'	APPROVE		A4
			SHEET
			1/1
			TITLE:
			Customer NO.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A1	08/03/28			
A0	08/03/13	NEW		

增加两款DIP尺寸规格