
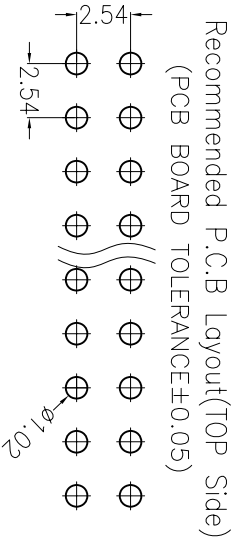


HSHF

NOTES:


Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze or Brass
 Contact plating: Au or Sn over Ni
 Insulator Material: PBT or PA6T+30%G. F UL94V-0

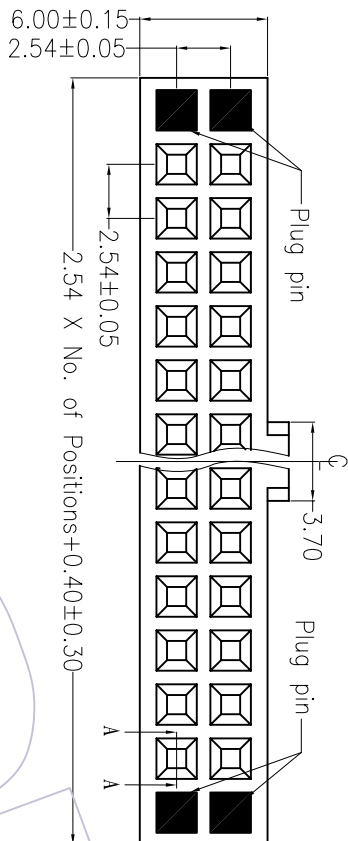


Ordering Information

2185DF X - 2 XX S XX X YN X 2

Add number I-fps No. of Pins per ROW:02-40PIN
 Contact Plating: Insulator: Packing:
 G0=Gold Finish A=B7I I=Tube
 G1=3μ"Gold C=P/A6T A=Tray
 G2=5μ"Gold G3=10μ"Gold G4=15μ"Gold
 G5=30μ"Gold S0=Gold Finish
 S1=3μ"Gold Tm S2=5μ"Gold Tm
 S3=10μ"Gold Tm S4=15μ"Gold Tm
 S5=30μ"Gold Tm SN=Tm

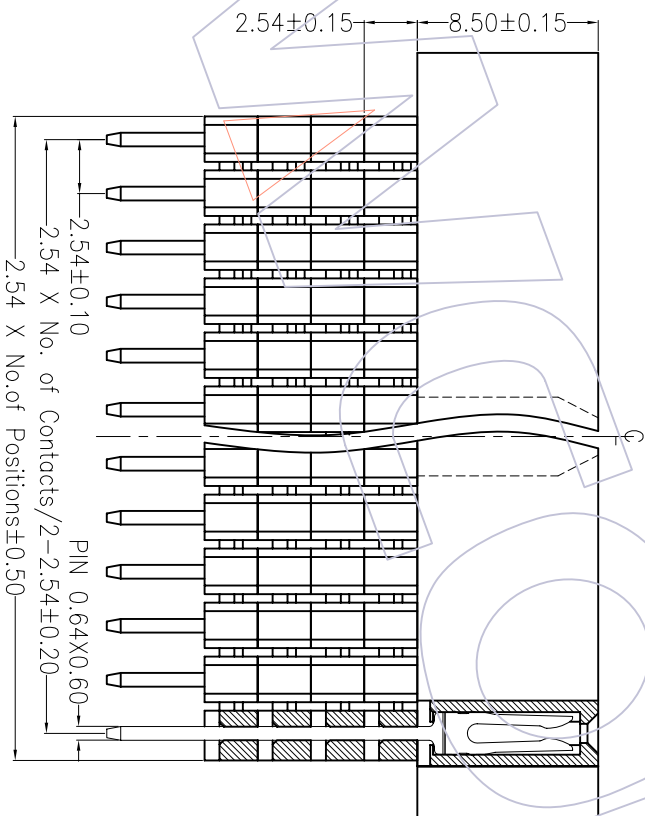

SECTION A-A

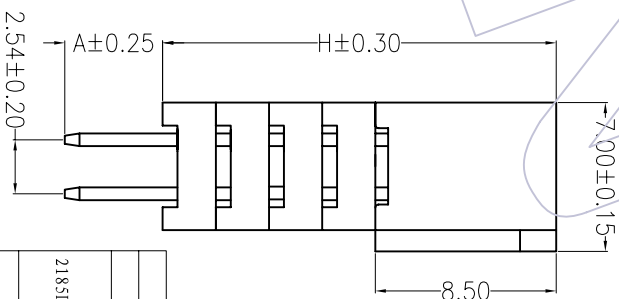

Dimension antitheses list

PART NO.	Add Number	Dim H	Dim A
2185DF1-2XXSXXYYNX2	1	11.05	5.50
2185DF2-2XXSXXYYNX2	2	13.59	4.85
2185DF3-2XXSXXYYNX2	3	16.13	2.30
2185DF4-2XXSXXYYNX2	4	18.67	4.60

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WEIXD	08.03.28	SCALE		PART NO.
					Angle	± 3'				UNIT	mm	
A1	08/03/28	增加两款DIP尺寸规格			X.X	±0.40	DESIGN			3:1	A4	SEE TABLE
A0	08/03/13	NEW			X.XXX	±0.25	CHECK			1/1	1/1	FILE: 54 DIAL 180° ADD HOUSING H=8.5 HOUSING WITH FULL BUMP #=6.0 PLUG PIN

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD