

HSP

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze or Brass
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T or PBT+30%G. F UL94V-0





Ordering Information

2185 - 3 XX S XX X YN X 1

No. of Pins per ROW=02-40PIN

Contact Plating: Au=Plt
 G1=3μ"Gold
 G2=5μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S1=3μ"Gold/Tin
 S2=5μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=1in

Insulator: C=PA6T
 A=Tray
 T=Tube

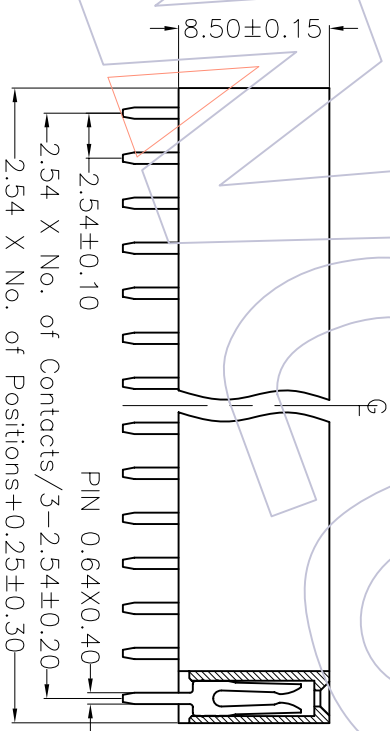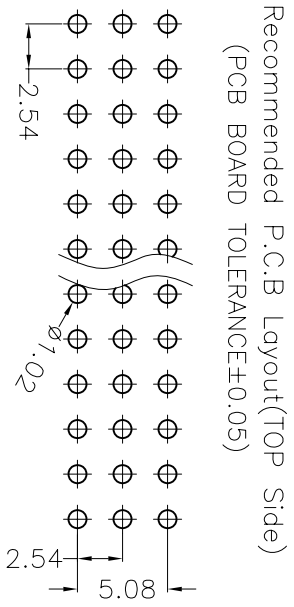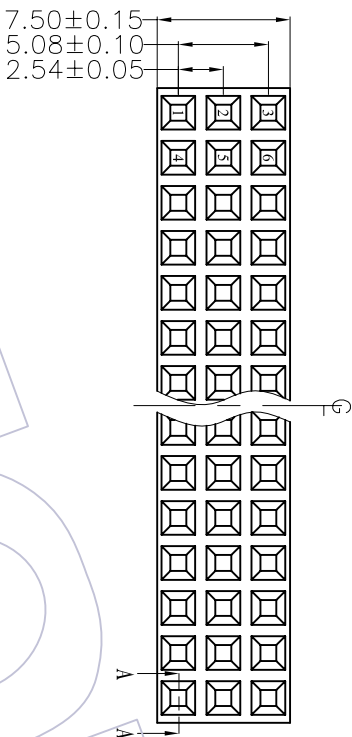

SECTION: A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WEIXD	SCALE		PART NO.	TITLE:
					Angle	± 3'			UNIT	mm		
A0	08/03/13	NEW			X.X	±0.40	DESIGN	08.03.13	A4	1/1	2185-3XXSXXYYN1	PH2.54mm THREE ROWS 180° H=8.50
					X.XX	±0.25	CHECK					
					X.XXX	±0.15	APPROVE					
1												

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD