

HSF

NOTES:



Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PBT or PA6T+30%G.F UL94V-0


Ordering Information

2111P-2 XX S XX X YN X X

No. of Pins per Row: 20P+52P
 Contact Plating: G0=Gold Flash G1=5μr/Gold G2=5μr/Gold G3=10μr/Gold G4=15μr/Gold G5=30μr/Gold
 Insulator: A=PBT T=tube I=TYPE 1 C=PA6T A=Tray Z=TYPE 2
 Packing: 1=Tube 1=TYPE 1 2=Tray 2=TYPE 2
 Series No. I=TYPE 1
 S1=Gold Flash/Tin S2=5μr/Gold/Tin S3=10μr/Gold/Tin S4=15μr/Gold/Tin S5=30μr/Gold/Tin SN=7in

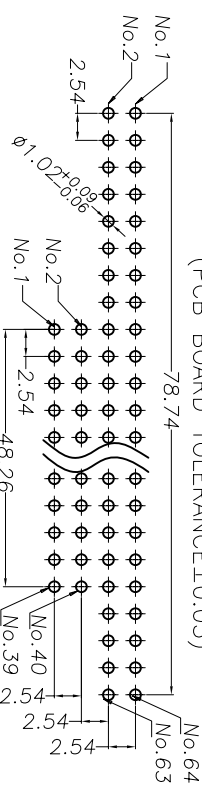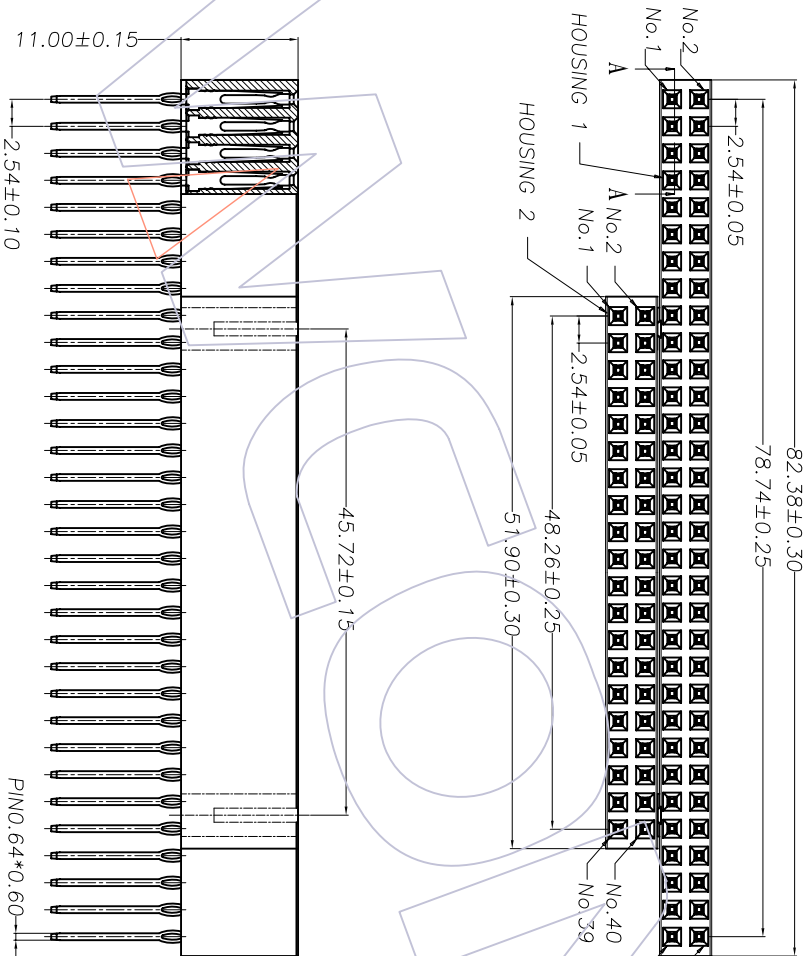

SECTION A-A

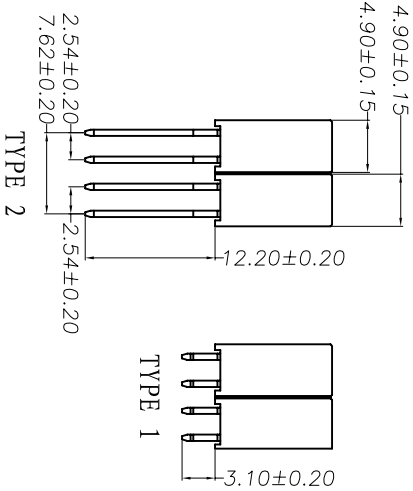

TITLE	PART NO.
TYPE 1	2111P-2XXSXXXXXXXX1
TYPE 2	2111P-2XXSXXXXXXXX2

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	08.03.13	SCALE	UNIT	SIZE	PART NO.	TITLE:	PROJ.	Customer NO.
A0	08/03/13	NEW			XXX ±0.25 XXX ±0.15 Angle ± 3'	DESIGN CHECK		1.5:1	mm	A4	1/1	2.54DUAL FEMALE H=11.0 W/FISH EYES 32P+20P			

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

SEE TABLE

2.54DUAL FEMALE H=11.0 W/FISH EYES 32P+20P