

HSP

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T+30%G. F UL94V-0

Ordering Information





2134-1XX M XX C UN X1

No. of Pins per Row: 30-40PIN

Contact Plating:
 G0=Gold Flash
 G1=3μ"Gold
 G2=50μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold

Packaging:
 T=Tube
 R=Tray&Reel

S0=Gold Flash/Tin
 S1=3μ"Gold/Tin
 S2=50μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin

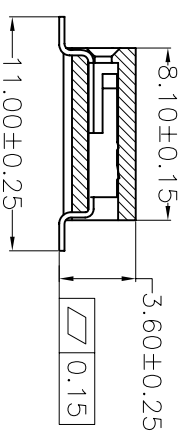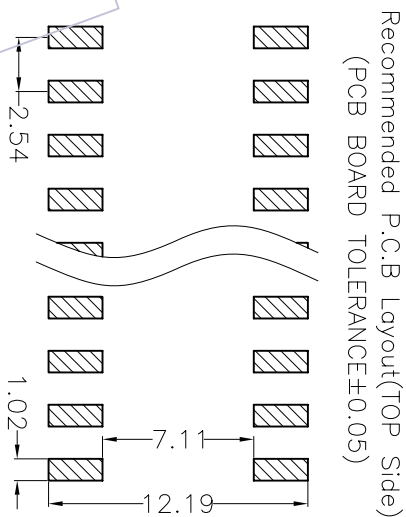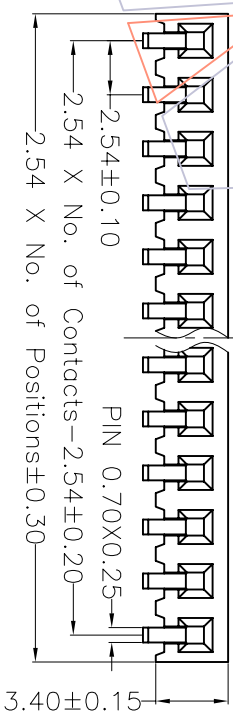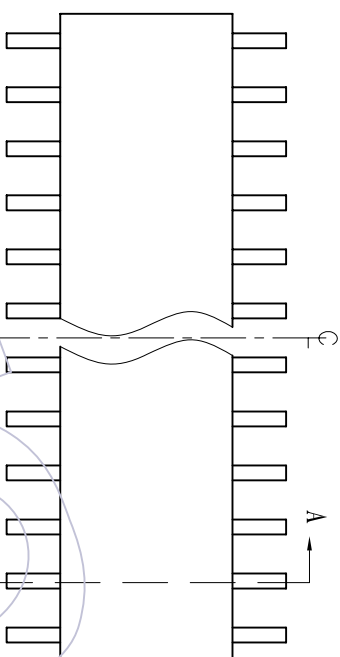

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	08.03.11	SCALE	3:1	UNIT	mm	PART NO.	2134-1XXMXXCUNX1
A0	08/03/10	NEW			XXX ±0.25	DESIGN			A4	1/1	SHEET	1/1	TITLE:	FH2.54 SINGLE SMT H=3.4
					XXX ±0.15	CHECK			PROJ.				CUSTOMER NO.	
					Angle ± 3'	APPROVE								

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD