

HSHF

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T or PBT+30%G.F UL94V-0

Ordering Information



2134-1XX RXX XUN X1

No. of Pins per Row: 42-40Pin

Contact Plating:
 A=Gold Flash
 G1=3μ"Gold
 G2=5μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S1=3μ"Gold/Tin
 S2=5μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin


Insulator:
 A=PBT
 C=PA6T

Packing:
 T=Tube
 R=Tray&Reel

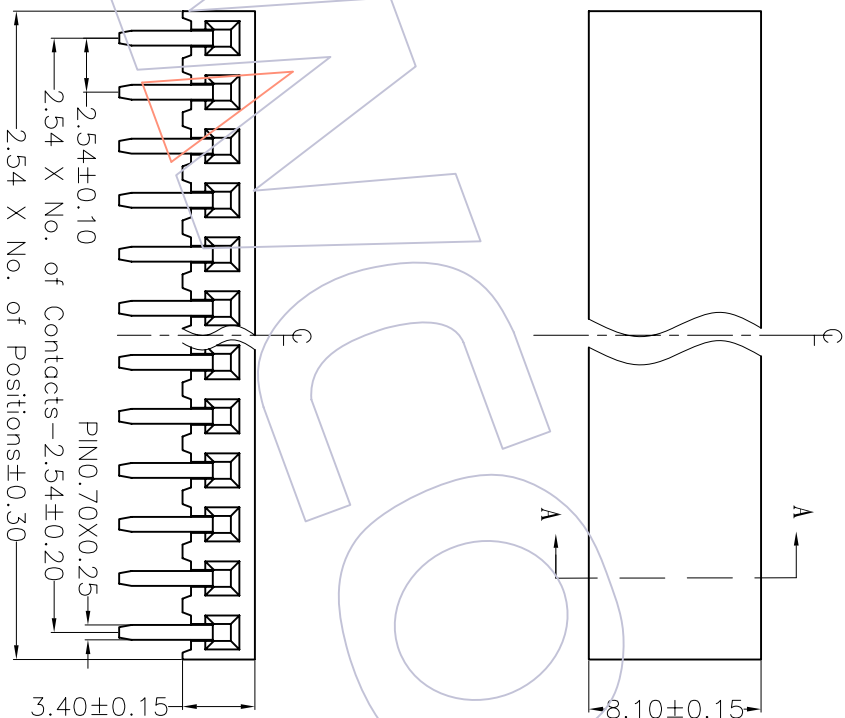

SECTION: A-A

Recommended P.C.B Layout(TOP Side)
 (PCB BOARD TOLERANCE±0.05)

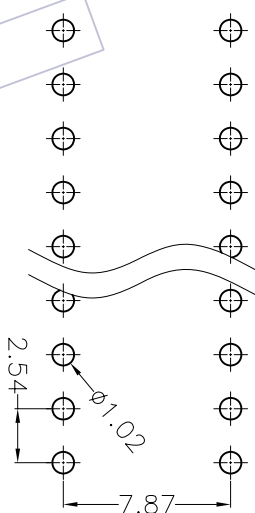

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	08.02.11	SCALE	3:1	<p>WCON 维峰五金电子有限公司 WAFER HARDWARE ELECTRONICS CO.,LTD</p>	PART NO.	2134-1XXRXXUNX1
A0	08/03/01	NEW			XXX	DESIGN		UNIT	mm			TITLE:	FH2.54 SINGLE 90° H=3.4
					XXX	CHECK		SIZE	A4				
					XXX			SHEET	1/1				
					Angle	APPROVE		PROJ.				Customer NO.	
					± 3'								
					DIM								
					TOL								