



2150-1XXMXXXUNX1 2150-1XXMXXXUNX2 2150-1XXRXXXUNX1 2150-1XXSXXXUNX1

2. 54mm Female Header, Single/Dual Row


SPECIFICATIONS




Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 1000V AC/Minute
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T+30%GF

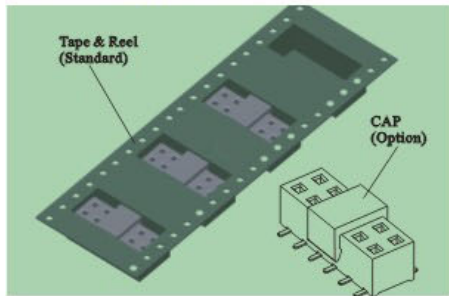


2150-4XXSXXXUNX1




2150-3XXSXXXUNX1




2150-2XXSXXXUNX1



2150-2XXCXXXUNX1



2150-2XXMXXXUNX1



2150-2XXMXXXUNX2

2150-X XX X XX X UN X X

NO.OF ROW
 1:Single Row
 2:Dual Row
 3:Triple Row
 4:Quad Row



NO.OF PINS PER ROW
 02~40P

CONTACT SHAPE
 S: Straight
 M: 180° SMT
 C: K Feet/Splint

CONTACT PLATING
 G0: 1u" Gold
 G1: 3u" Gold
 G2: 5u" Gold
 G3: 10u" Gold
 G4: 15u" Gold
 G5: 30u" Gold
 G6: 20u" Gold
 S0: 1u" Gold/Tin
 S1: 3u" Gold/Tin
 S2: 5u" Gold/Tin
 S3: 10u" Gold/Tin
 S4: 15u" Gold/Tin
 S5: 30u" Gold/Tin
 S6: 20u" Gold/Tin
 SN: Tin

INSULATOR MATERIAL
 A: PBT
 C: PA6T
 D: LCP

PACKING
 T: Tube
 R: Tape & Reel

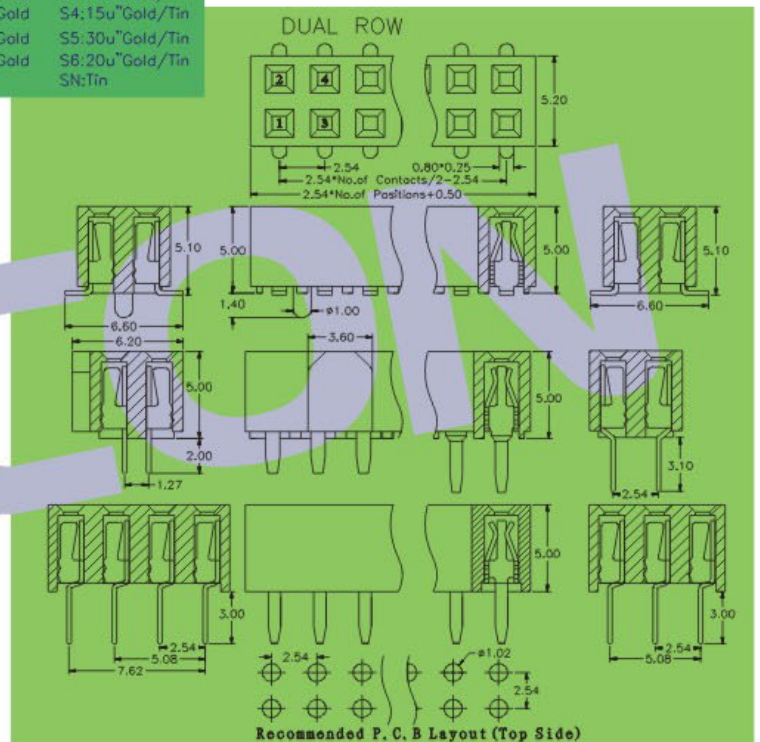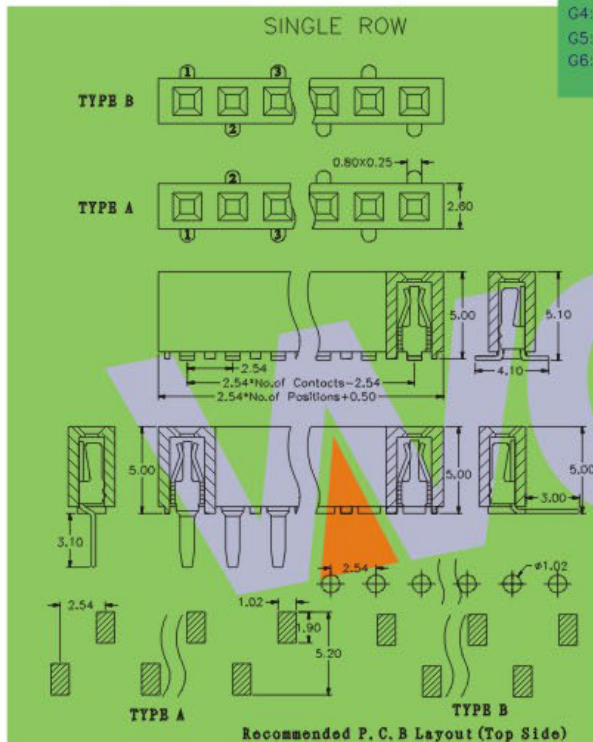

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418