



2150-1XXWXXXUNX1 2150-1XXWXXXUNX2 2150-1XXWXXXUNX3 2150-1XXWXXXUNX4

## 2. 54mm Female Header, Single/Dual Row

### SPECIFICATIONS



Current Rating: 3.0AMP  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : 1000V AC/Minute  
 Operation Temperature: -40°C to +105°C  
 Contact Material: Phosphor Bronze  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T+30%GF

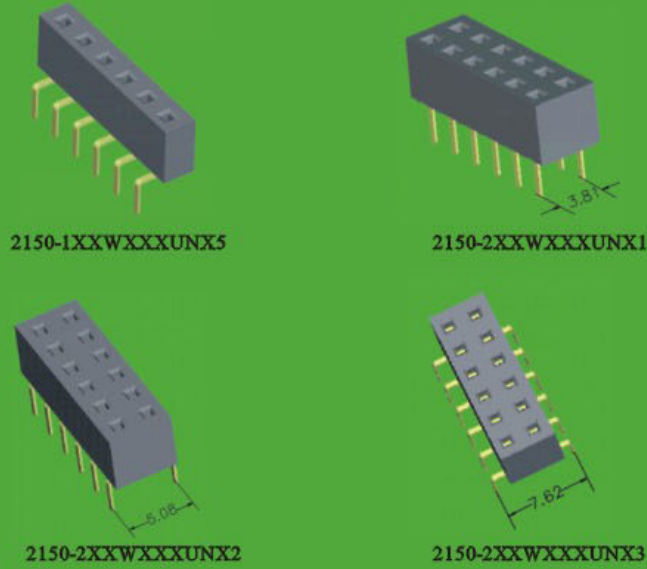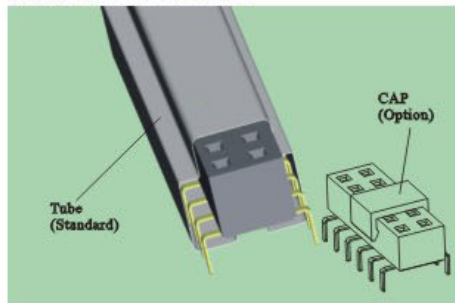

2150-1XXWXXXUNX5

2150-2XXWXXXUNX1

2150-2XXWXXXUNX2

2150-2XXWXXXUNX3

## 2150-X XX W XX X UN X X


NO. OF ROW  
 1: Single Row  
 2: Dual Row

NO. OF PINS  
 PER ROW  
 02~40P

CONTACT PLATING  
 G0: 1u" Gold S0: 1u" Gold/Tin  
 G1: 3u" Gold S1: 3u" Gold/Tin  
 G2: 5u" Gold S2: 5u" Gold/Tin  
 G3: 10u" Gold S3: 10u" Gold/Tin  
 G4: 15u" Gold S4: 15u" Gold/Tin  
 G5: 30u" Gold S5: 30u" Gold/Tin  
 G6: 20u" Gold S6: 20u" Gold/Tin  
 SN: Tin

INSULATOR MATERIAL  
 A: PBT  
 C: PA6T  
 D: LCP

PACKING  
 T: Tube  
 R: Tape & Reel

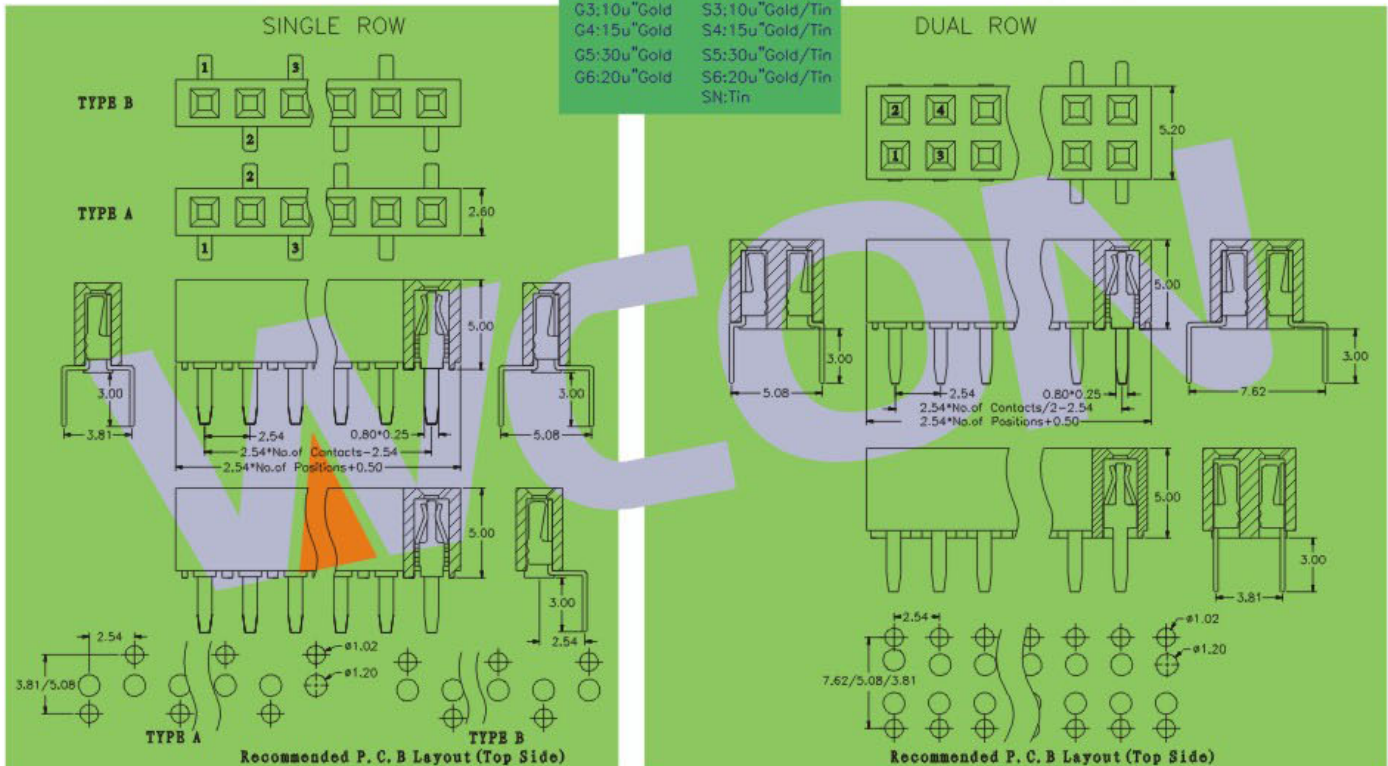

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418