

HSP

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze or Brass
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T or PBT+30%G.F UL94V-0

Ordering Information





2135T - 2 XX S XX X YN T1

No. of Pins per ROW: 02~40Pin

Contact Plating:
 G0=Gold Flash
 G1=3μ"Gold
 G2=5μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S1=3μ"Gold/Tin
 S2=5μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin

Insulator:
 A=PBT
 C=PA6T

Packing:
 T=Tube

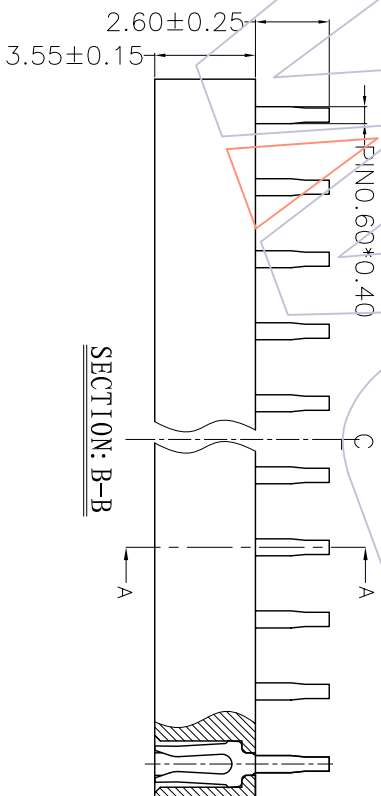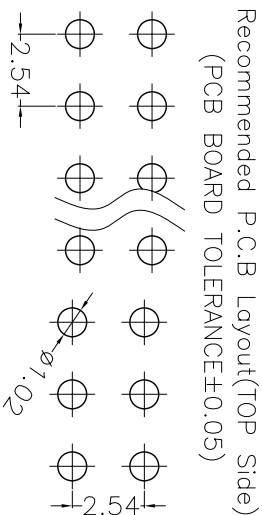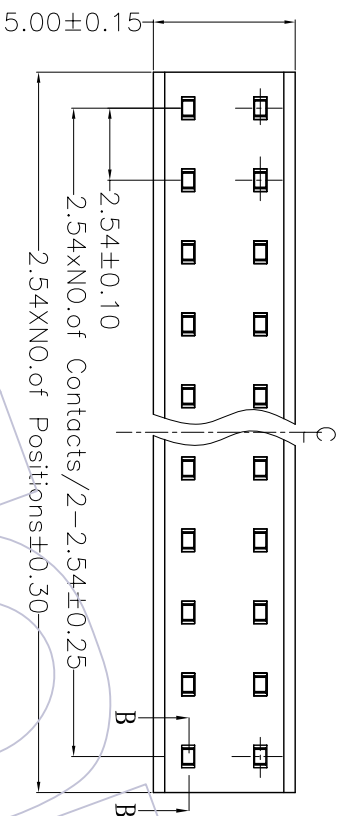

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	UNIT	PART NO.	TITLE:
A0	08/03/01	NEW			X.X ±0.40	DESIGN	08.03.11	4:1	mm	2135T-2XXSXXXT1	FH2.54 DUAL 180° H=3.5
					X.XX ±0.25	CHECK			A4		
					X.XXX ±0.15	APPROVE			1/1		
					Angle ± 3'				PROJ.		Customer NO.

WCON 维峰五金电子有限公司
 WAFER HARDWARE ELECTRONICS CO., LTD