




HSH

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T+30%G. F UL94V-0

Recommended P.C.B Layout(TOP Side)
 (PCB BOARD TOLERANCE±0.05)

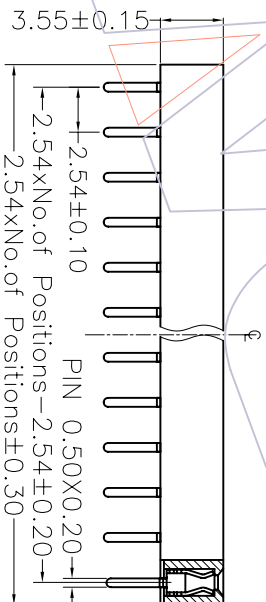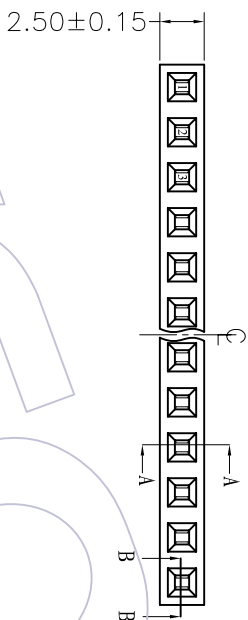

Ordering Information

2135-1XXSXXCUNT1

No. of Pins per ROW: 10 PIN

Contact Plating:
 Co=Gold Flash
 G1=3μ"Gold
 G2=5μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold

Packing:
 T=Tube

CH=15μ"Gold
 SP=Gold Flash/Tin
 S1=3μ"Gold/Tin
 S2=5μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin

SECTION B-B

SECTION A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	PART NO.	TITLE:
A0	08/03/01	NEW			XXX ±0.40 XXX ±0.25 XXX ±0.15 Angle ± 3'	DESIGN CHECK		UNIT mm SIZE A4	2135-1XXSXXCUNT1	FH2.54 SINGLE 180° H=3.5
1					DIM	APPROVE	PROJ.	Customer NO.		

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD