HSF

NOTES:
Current Rating: 3.0AMP
Withstand Voltage: 500V AC/DC
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩMin
Operation Temperature: -40℃ to +105℃

Contact Material: Phosphor Bronze
Contact plating: Au or Sn over Ni
Insulator Material: PA6T+30%G.F UL94V-0

Recommended P.C.B Layout(TOP Side)
(PCB BOARD TOLERANCE±0.05)

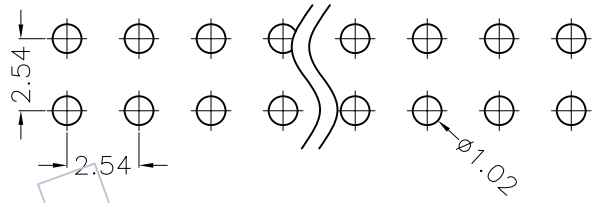

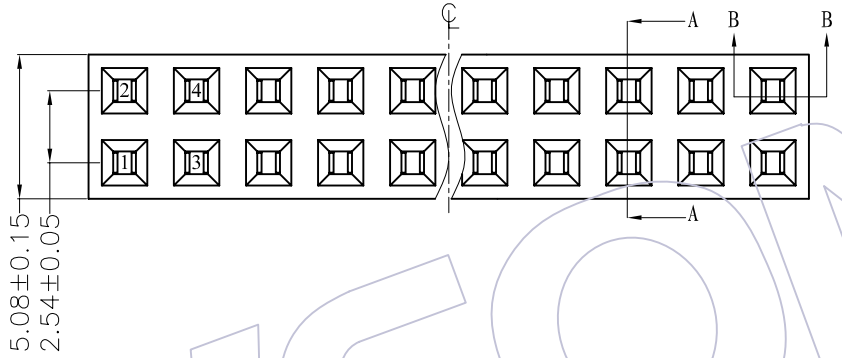

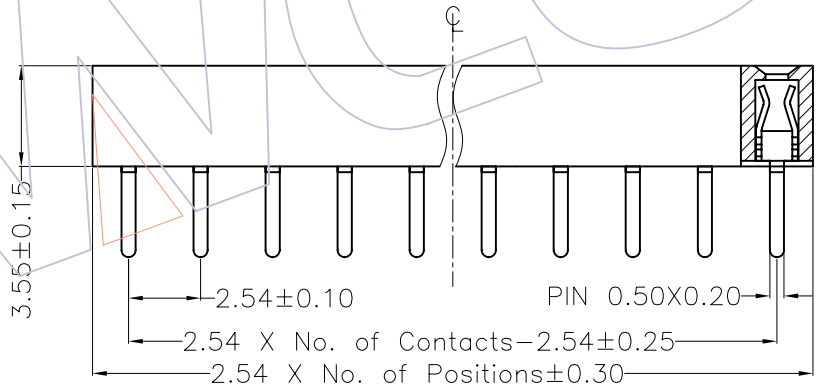

SECTION: B-B



SECTION: A-A

Ordering Information

2135 - 2XX S XX C UN T1

- XX: No.of Pins per ROW:02~40PIN
- XX: Contact Plating:
  - G0=Gold Flash
  - G1=3μ"Gold
  - G2=5μ"Gold
  - G3=10μ"Gold
  - G4=15μ"Gold
  - G5=30μ"Gold
  - S0=Gold Flash/Tin
  - S1=3μ"Gold/Tin
  - S2=5μ"Gold/Tin
  - S3=10μ"Gold/Tin
  - S4=15μ"Gold/Tin
  - S5=30μ"Gold/Tin
  - SN=Tin
- T1: Packing: T=Tube

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/03/01	NEW	———	———

OPERATION				
X.X	±0.40	DRAW	WEIXD	08.03.11
X.XX	±0.25	DESIGN		
X.XXX	±0.15	CHECK		
Angle	± 3°	APPROVE		
DIM	TOL			

SCALE	4:1
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WCON 维峰五金电子有限公司
WAFE HARDWARE ELECTRONICS CO.LTD

PART NO.	2135-2XXSXXCUNT1
TITLE:	FH2.54 DUAL 180° H=3.5
Customer NO.	