HSF

NOTES:
Current Rating:3.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩMin
Operation Temperature:−40℃ to+105℃

Contact Material:Phosphor Bronze
Contact plating:Au or Sn over Ni
Insulator Material:PA6T+30%G.F(UL94V−0)

Recommended P.C.B Layout
(PCB BOARD TOLERANCE±0.05)

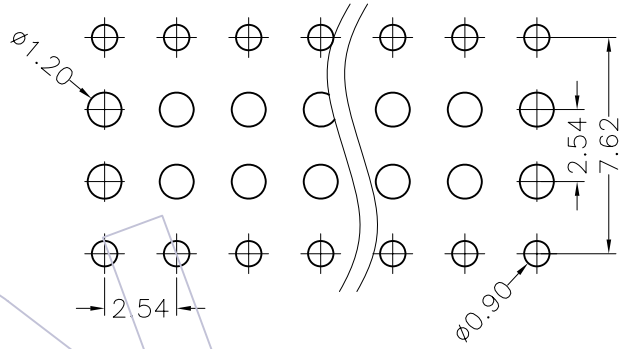

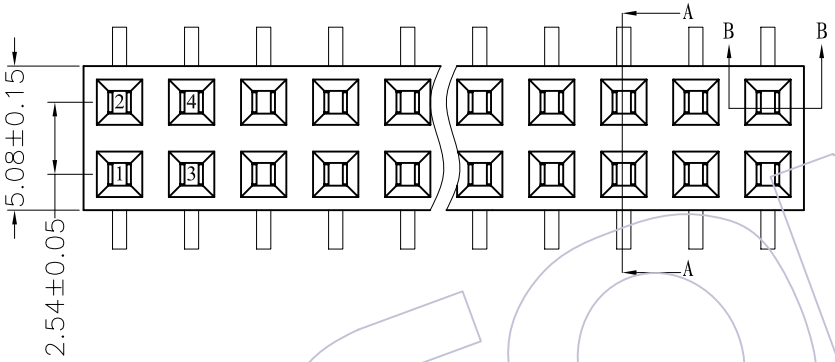

Ordering Information

2135 - 2 XX W XX C UN T 1

- XX: No.of Pins per ROW:02~40PIN
- XX: Contact Plating:
  G0=Gold Flash
  G1=3μ"Gold
  G2=5μ"Gold
  G3=10μ"Gold
  G4=15μ"Gold
  G5=30μ"Gold
  S0=Gold Flash/Tin
  S1=3μ"Gold/Tin
  S2=5μ"Gold/Tin
  S3=10μ"Gold/Tin
  S4=15μ"Gold/Tin
  S5=30μ"Gold/Tin
  SN=Tin
- T: Packing: T=Tube

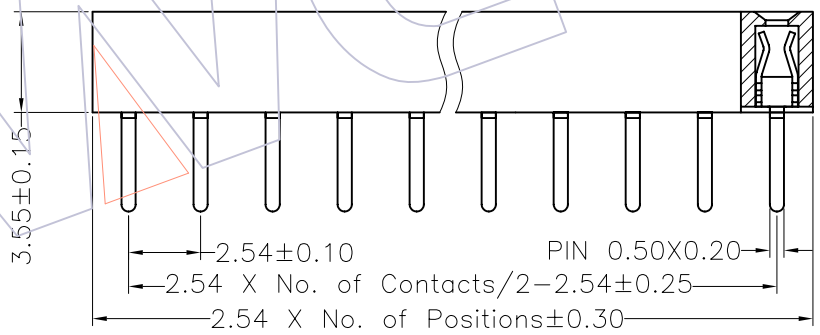

SECTION: B-B



SECTION: A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A2	08/06/11	Changing P.C.B Layout		
A0	08/03/01	NEW	———	———

OPERATION				
X.X	±0.40	DRAW	WEIXD	08.06.11
X.XX	±0.25	DESIGN		
X.XXX	±0.15	CHECK		
Angle	± 3°	APPROVE		
DIM	TOL			

SCALE	4:1
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WCON 维峰五金电子有限公司
WAFE HARDWARE ELECTRONICS CO.LTD

PART NO.	2135-2XXWXXCUNT1
TITLE:	FH2.54 DUAL ROW CENTIPEDE FOOT H=3.5
Customer NO.	