

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T+30%G. F UL94V-0


Ordering Information

2150-1XX M XX C UN T X

No. of Pins per ROW: 42~40PIN
 Contact Plating: G0=Gold Flash
 G1=3μ"Gold
 G2=5μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S1=3μ"Gold/Tin
 S2=5μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=1Tin

Packing: T=Tube
 P=Tube+CAP
 R=Tube&Res+CAP

Series No. 1=TYPE 1
 2=TYPE 2

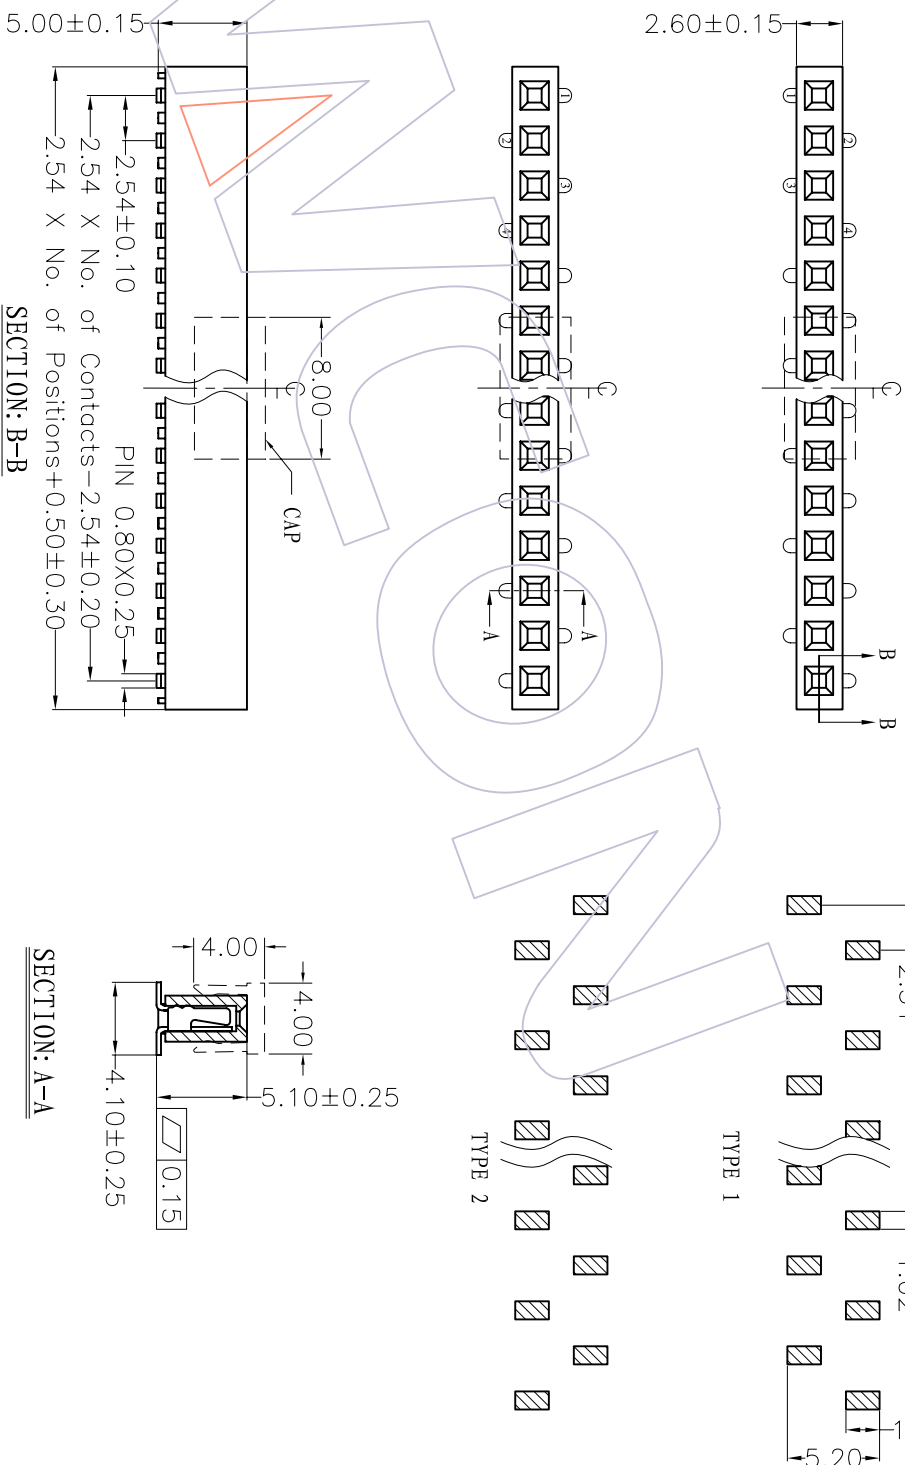

SECTION: B-B

SECTION: A-A

TYPE	PART NO.
TYPE 1	2150-1XXMXXCUNT1
TYPE 2	2150-1XXMXXCUNT2

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD

H

OPERATION	DRAW	WEIXD	SCALE
X.X			3:1
X.XX	DESIGN		UNIT
X.XXX	CHECK		SIZE
Angle	APPROVE		A4
± 3'			SHEET
± 3'			1/1
± 3'			PROJ.

SEE TABLE

PH2.54 SINGLE SMT H=5.0

G

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/03/01	NEW		

H

1

2

3

4

5

6

7

8

9

10