
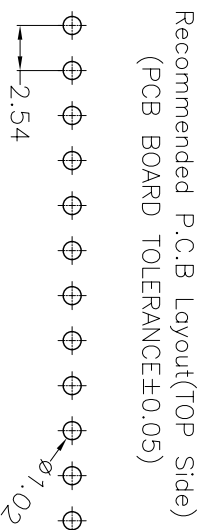


HSP

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C



Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T or PBT+30%G.F UL94V-0

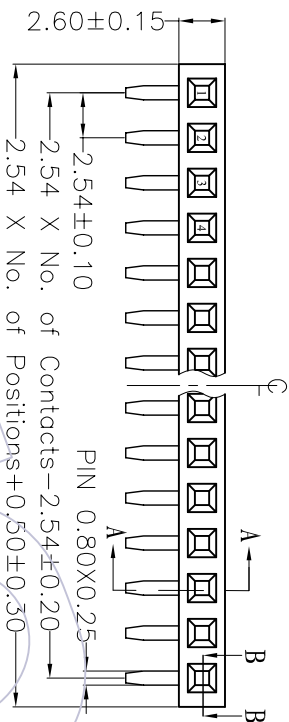

Ordering Information

2150 - 1 XX R XX X UN T1

No. of Pins per Row: 02~40Pin
 Contact Plating: G0=Gold Flash, G1=3µ"Gold, G2=5µ"Gold, G3=10µ"Gold, G4=15µ"Gold, G5=30µ"Gold, S0=Gold Flash/Tin, S1=3µ"Gold/Tin, S2=5µ"Gold/Tin, S3=10µ"Gold/Tin, S4=15µ"Gold/Tin, S5=30µ"Gold/Tin, SN=Tin
 Insulator: A=PBT, C=PA6T
 Packing: T=Tube

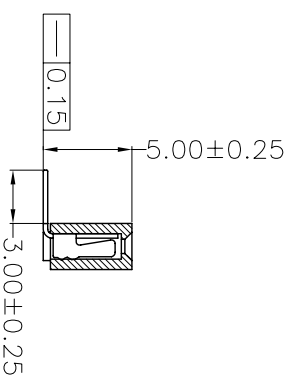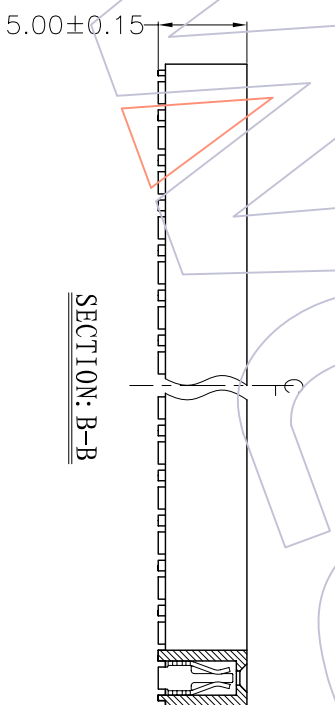

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WEIXD	SCALE		PART NO.	TITLE:
					XXX	±0.40			UNIT	3:1		
A0	08/03/01	NEW			XXX	±0.25	DESIGN		mm	A4	2150-1XXXXXXUNT1	FH2.54 SINGLE 90° H=5.0
					Angle	± 3'	CHECK			1/1		
					DIM	TOL	APPROVE			PROJ.		

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD