
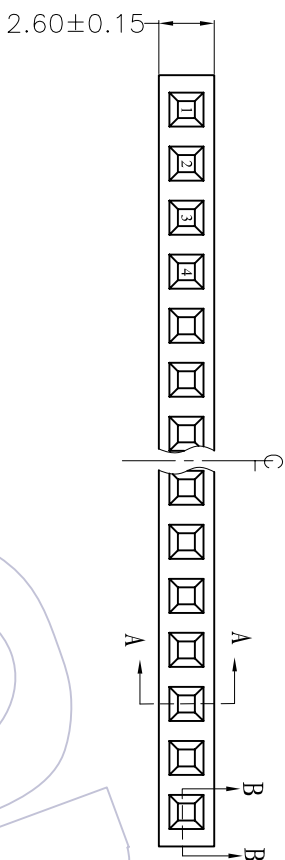


HSF

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C



Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni
 Insulator Material: PA6T or PBT+30%G.F UL94V-0

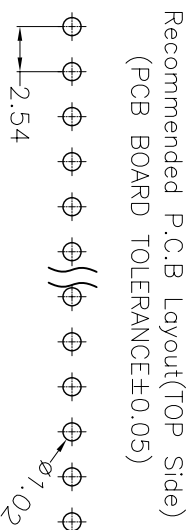

Ordering Information

2150 - 1 XX S XX X Y N T 1

No. of Pins per Row: 02~40Pin
 Contact Plating: Au=3μ"Gold, Ag=1μ"Gold, C=PA6T
 Insulator: A=PBT, C=PA6T
 Packing: T=Tube
 G1=3μ"Gold, G2=5μ"Gold, G3=10μ"Gold, G4=15μ"Gold, G5=30μ"Gold, S0=Gold Flash/Tin, S1=3μ"Gold/Tin, S2=5μ"Gold/Tin, S3=10μ"Gold/Tin, S4=15μ"Gold/Tin, S5=30μ"Gold/Tin, SN=Tin

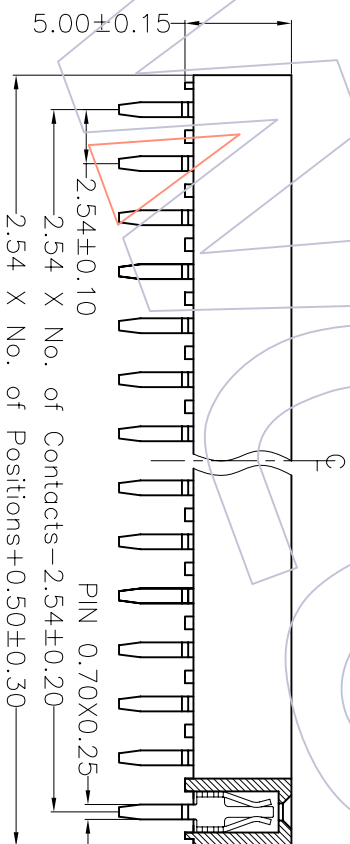

SECTION: B-B

SECTION: A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	UNIT	PART NO.	TITLE:
A0	08/03/01	NEW			XXX ±0.40 XXX ±0.25 XXX ±0.15 Angle ± 3'	DESIGN CHECK		3:1 mm A4	mm A4	2150-1XXSXXYYNT1	FH2.54 SINGLE 180° H=5.0
1											

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD