

# HSP

**NOTES:**

Current Rating: 3.0AMP  
 Withstand Voltage: 500V AC/DC  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩMin  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au or Sn over Ni  
 Insulator Material: PA6T+30%G, F UL94V-0

## Ordering Information



2150 - 2 XX C XX C U N T 1

No. of Pins per Row: 42=40PIN



Contact Plating:  
 Co=Gold Flash  
 G1=3μ"Gold  
 G2=5μ"Gold  
 G3=10μ"Gold  
 G4=15μ"Gold  
 G5=30μ"Gold

Packing:  
 T=Tube

SP=Gold Flash/Tin  
 SI=3μ"Gold/Tin  
 S2=5μ"Gold/Tin  
 S3=10μ"Gold/Tin  
 S4=15μ"Gold/Tin  
 S5=30μ"Gold/Tin  
 SN=Tin

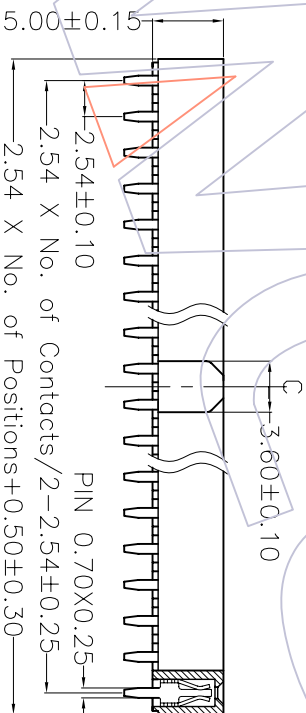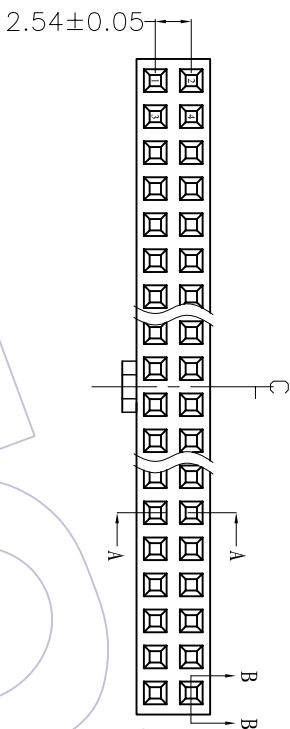

SECTION: B-B

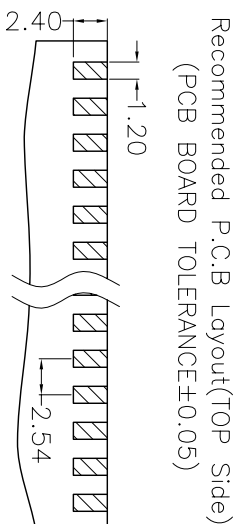

SECTION: A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WEIXD	SCALE		UNIT	PART NO.	TITLE:
					XXX	±0.40			DESIGN	2:1			
A0	08/03/01	NEW			XXX	±0.25	CHECK		A4	1/1	Customer NO.	2150-2XXCXXCUNT1	FH2.54 DUAL SPLINT H=5.0
					Angle	± 3'	APPROVE						

**WCON** 维峰五金电子有限公司  
 WAFE HARDWARE ELECTRONICS CO. LTD

H 1 2 3 4 5 6 7 8 9 10