
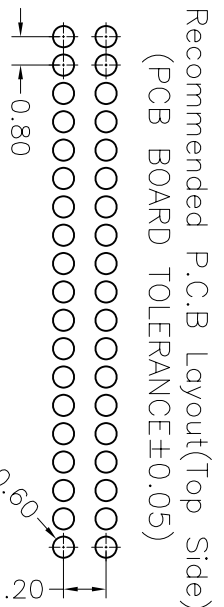


HSP

NOTES:
 Current Rating: 0.75AMP
 Contact Resistance: 30mΩ max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze or Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: LCP+30%GF(UL94V-0)

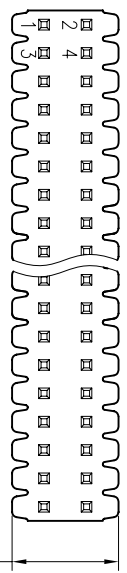



Ordering Information

1614-1 2 XX XX S XXX A 1

- No. of Pins per Row: 01~50
- Contact Plating
- G0=Gold Flash
- G1=3u"Gold
- G2=5u"Gold
- G3=10u"Gold
- G4=15u"Gold
- G5=30u"Gold
- S0=Gold Flash/Tin
- S1=3u"Gold/Tin
- S2=5u"Gold/Tin
- S3=10u"Gold/Tin
- S4=15u"Gold/Tin
- S5=30u"Gold/Tin
- SN=Tin

Pin length
 L=A+B

Packing
 A=Tray

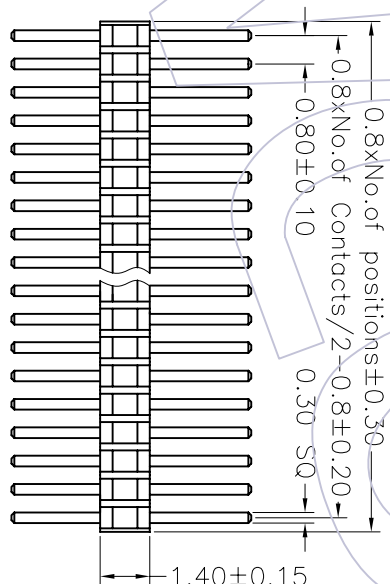

Dimension antitheses list	
ITEM	A B
Standard	2.50 2.80
Alternate	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	PART NO.	TITLE:
A0	08/04/10	NEW			XXX ±0.40 XXX ±0.25 X XXX ±0.15 Angle ± 3'	DESIGN CHECK	08/04/10	5:1 mm A4	1614-12XXXXXXA1	PH0.80*1.20 DUAL ROW 180° H=1.4
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL	APPROVE		PROJ.	Customer NO.	
1										

WCON 维峰五金电子有限公司
 WAFE HARDWARE ELECTRONICS CO.,LTD