

HSF

NOTES:





Current Rating: 7.0AMP
 Voltage Rating: 1000V AC/DC
 Contact Resistance: 30mΩ Max
 Insulation Resistance: 1000MΩMin
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Sn over 50 μ " Ni
 Insulator Material: LCP+30%G. F UL94V-0

Ordering Information

2989-1 XX M XX D YN T 1

- No. of Pins per ROW: 02-30PIN
- Contact Plating:
 G0=Gold Flash
 G1=5μ"Gold
 G2=5μ"Gold
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S1=5μ"Gold/Tin
 S2=5μ"Gold/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin
- Packing:
 T=Tube
 P=Tube+CAP
 R=1ppk&keel+CAP

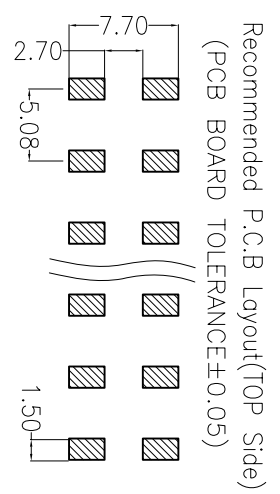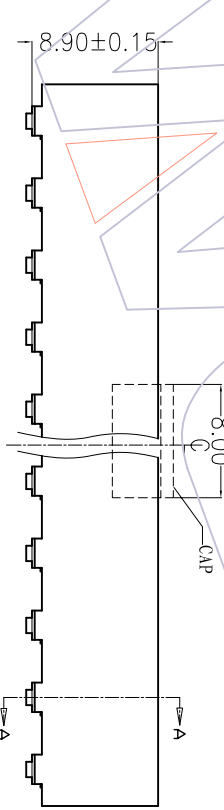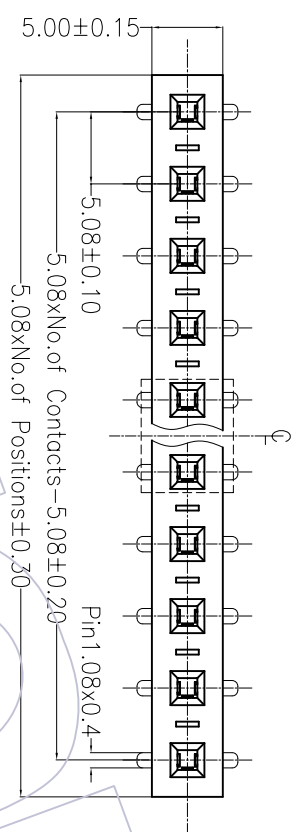

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	PART NO.
A0	08/03/13	NEW			X.X ±0.40	DESIGN	08.03.13	2.5:1	2989-1XXMXXDUNT1
					X.XX ±0.25	CHECK			FHS.08 SINGLE SMT H=8.9
					X.XXX ±0.15	APPROVE			
					Angle ± 3'				
					DIM TOL				

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD