
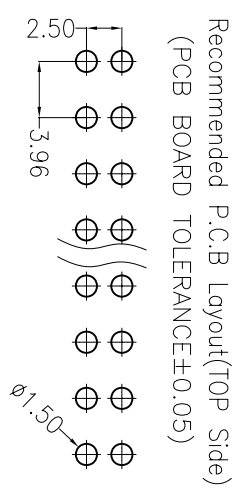


# HSF

**NOTES:**

Current Rating: 7.0AMP  
 Withstand Voltage: 1000V AC/DC  
 Contact Resistance: 30mΩ Max  
 Insulation Resistance: 1000MΩMin  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact plating: Sn over Ni  
 Insulator Material: LCP+30%G. F. UL94V-0

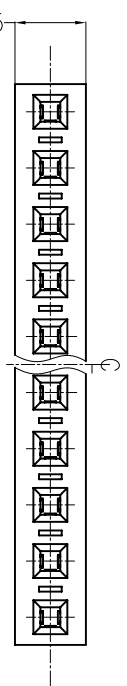

## Ordering Information



2889-1 XX S XX D YN T 1

No. of Pins per Row: 02-30Pin

Contact Plating:  
 G0=Gold Flash  
 G1=5μr"Gold  
 G2=5μr"Gold  
 G3=10μr"Gold  
 G4=15μr"Gold  
 G5=30μr"Gold

Packing:  
 T=Tube

S0=Gold Flash/Tin  
 S1=5μr"Gold/Tin  
 S2=5μr"Gold/Tin  
 S3=10μr"Gold/Tin  
 S4=15μr"Gold/Tin  
 S5=30μr"Gold/Tin  
 SN=Tin

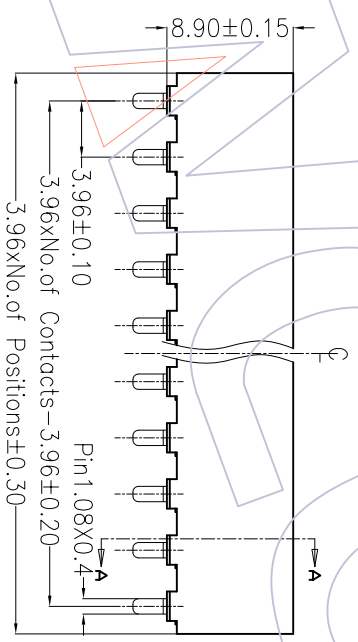

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WEIXD	SCALE		PART NO.	TITLE:
					Angle	± 3'			UNIT	mm		
A0	08/03/13	NEW			X.X	±0.40			2.0:1		2889-1XXSXXDUNT1	FH3.96 SINGLE 180° H=8.9
					X.XX	±0.25	DESIGN					
					X.XXX	±0.15	CHECK					
					Dim	TOL	APPROVE					

**WCON** 维峰五金电子有限公司  
 WAVE HARDWARE ELECTRONICS CO. LTD