

HSP

TECHNICAL SPECS:

Current Rating:1.5AMP
Contact Resistance:20m Ω Max
Insulation Resistance:500M Ω Min
Withstanding Voltage:1000V AC/Minute
Operation Temperature:-40°C to +105°C


Contact Material:Phorpos bronze
Contact plating:Au or Sn over Ni
Insulator Material:PBT+30%G.F(UL94V-0)

Ordering Information

3731 - 11 01 Q **XX** X 0 1

Housing shape
O=open
C=close

Contact Plating Colour
G0=Gold Flash B=Black
G1=3u"Gold R=Red
G2=5u"Gold Y=Yellow
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Ni
S1=3u"Gold/Ni
S2=5u"Gold/Ni
S3=10u"Gold/Ni
S4=15u"Gold/Ni
S5=30u"Gold/Ni
SN=Tin

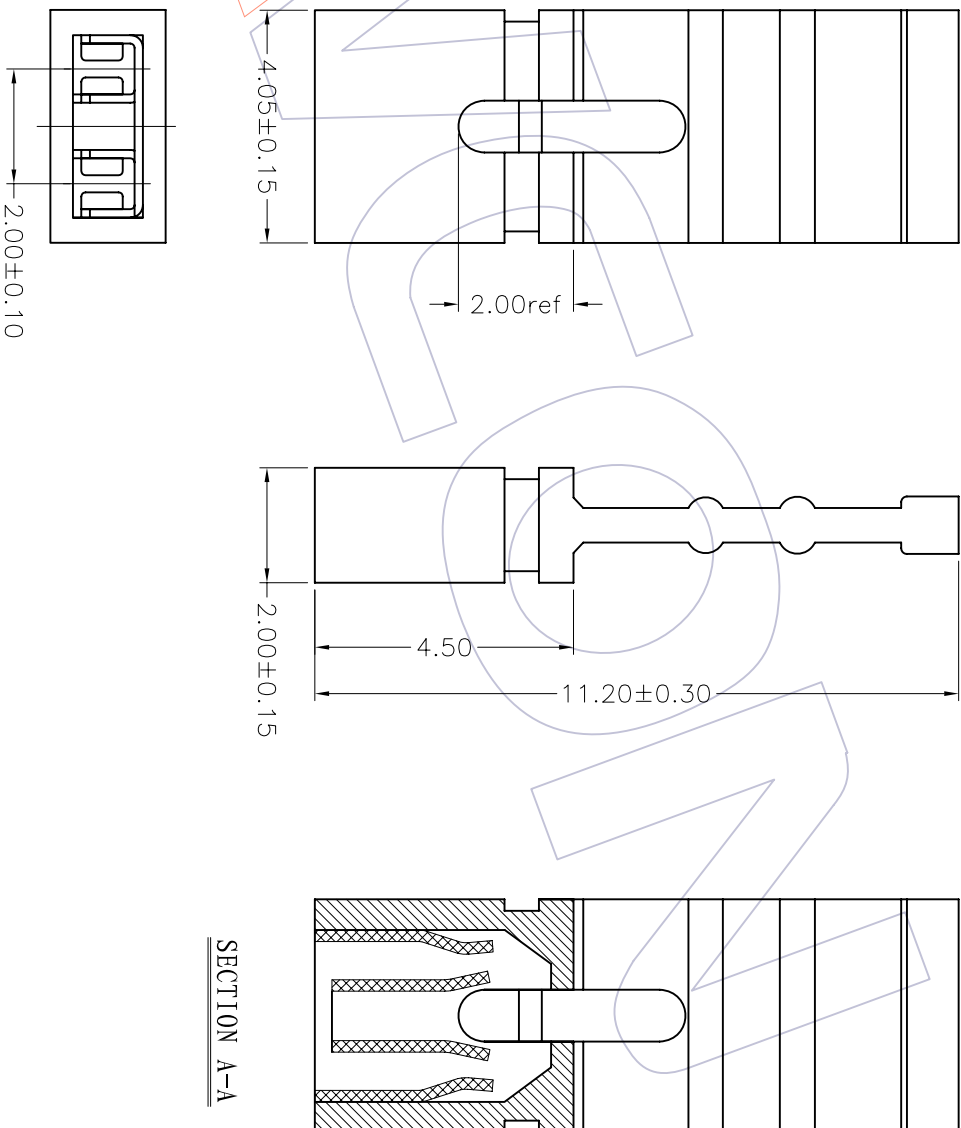

SECTION A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	PART NO.	TITLE:
A0	08/10/29	NEW			X.X ±0.30	DESIGN	08/10/29	1:1	3731-11010XXX01	WAPE HARDWARE ELECTRONICS CO. LTD
					X.XX ±0.25	CHECK		A4		2.00mm MINI JUMPER BODY LENGTHEN OPEN TYPE
					X.XXX ±0.15	APPROVE		1/1		
					Angle ± 3'	PROJ.				
					DIM TOL					

WCON 维峰五金电子有限公司
WAPE HARDWARE ELECTRONICS CO. LTD

3731-11010XXX01

2.00mm MINI JUMPER BODY LENGTHEN OPEN TYPE