HSF

TECHNICAL SPECS:
Current Rating:3.0AMP
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Withstanding Voltage:1000V AC/Minute
Operation Temperature:−40°C to +105°C

Contact Material:Brass
Contact plating:Au or Sn over Ni
Insulator Material:PBT+30%G.F(UL94V−0)



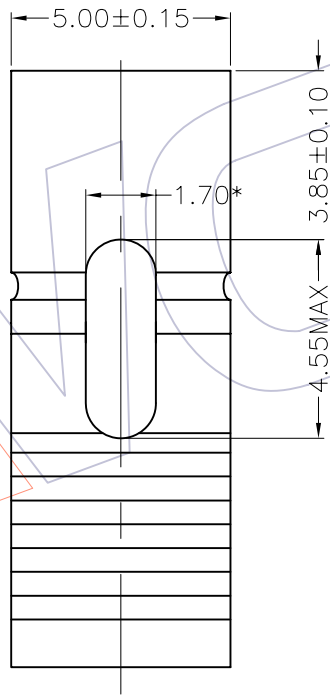

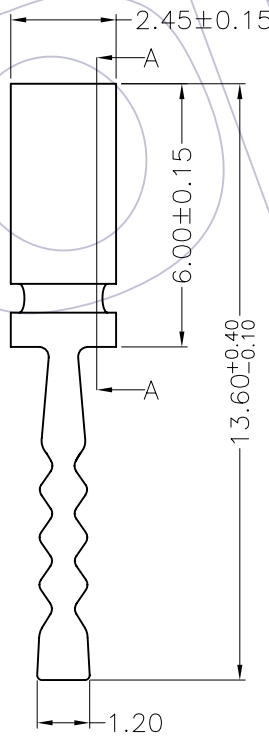

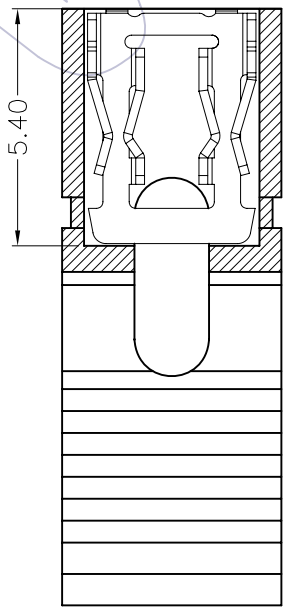

SECTION A−A

Ordering Information

3730 - 13 01 O XX X 01

Housing shape	Contact Plating	Colour
O=open	G0=Gold Flash	B=Black
C=close	G1=3u"Gold	R=Red
	G2=5u"Gold	Y=Yellow
	G3=10u"Gold	
	G4=15u"Gold	
	G5=30u"Gold	
	S0=Gold Flash/Ni	
	S1=3u"Gold/Ni	
	S2=5u"Gold/Ni	
	S3=10u"Gold/Ni	
	S4=15u"Gold/Ni	
	S5=30u"Gold/Ni	
	SN=Tin	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/10/29	NEW	———	———

OPERATION		DRAW	WEIXD	08/10/29
X.X	±0.30	DESIGN		
X.XX	±0.25			
X.XXX	±0.15	CHECK		
Angle	± 3°	APPROVE		
DIM	TOL			

SCALE	1:1	WCON 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO.LTD	
UNIT	mm		
SIZE	A4	PART NO.	3730-13010XXX01
SHEET	1/1	TITLE:	2.54mm MINI JUMPER BODY LENGTHEN OPEN TYPE
PROJ.		Customer NO.	