





3711-4001CXXB

## 2.00mm MINI JUMPER

### SPECIFICATIONS



Current Rating: 1.5AMP  
 Contact Resistance: 20m  $\Omega$  Max.  
 Insulation Resistance: 1000M  $\Omega$  Min.  
 Withstanding Voltage : 500V AC/Minute  
 Operation Temperature: -40°C to +105°C  
 Contact Material: Phorphos bronze/Brass  
 Contact plating: Au Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT+30%GF

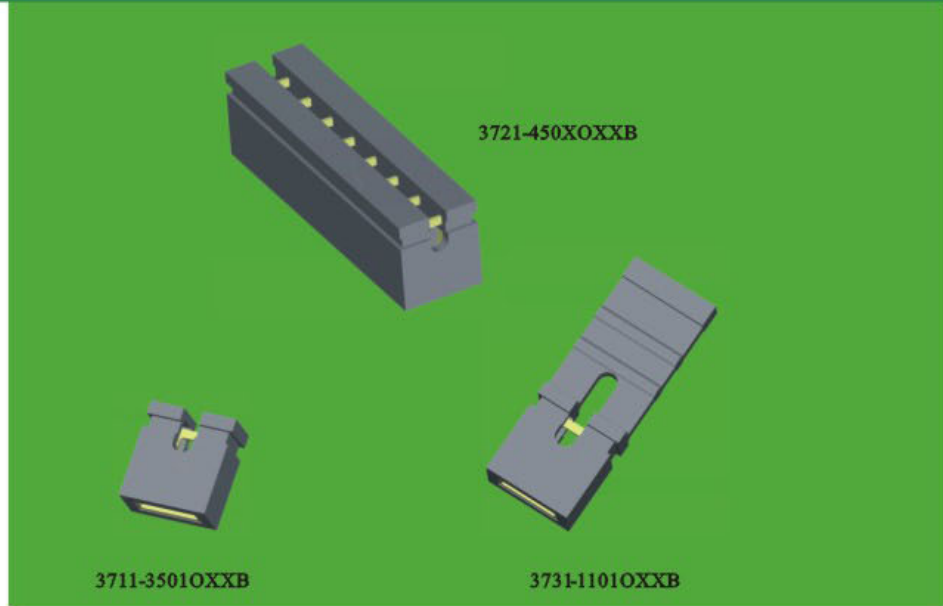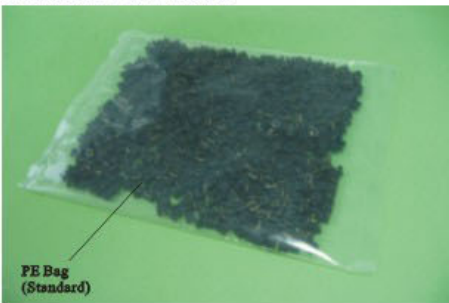

## 37XX- XX 0X X XX X

CONNECTOR TYPE  
 11:2.0 Mini Jumper  
 21:2.0 Body Connect type Jumper  
 31:2.0 Body lengthen type Jumper



HEIGHT OF HOUSING  
 35:3.50  
 40:4.00  
 45:4.50  
 11:11.20

NO.OF BODY CONNECT

HOUSING SHAPE  
 O:Open  
 C:Close

CONTACT PLATING  
 G0:1u" Gold Over Ni  
 G1:3u" Gold Over Ni  
 G2:5u" Gold Over Ni  
 G3:10u"Gold Over Ni  
 G4:15u"Gold Over Ni  
 G5:30u"Gold Over Ni  
 SN:Tin

COLOUR OF HOUSING  
 B:Black W:White  
 U:Blue Y:Yellow  
 R:Red N:Green  
 Standard:Black

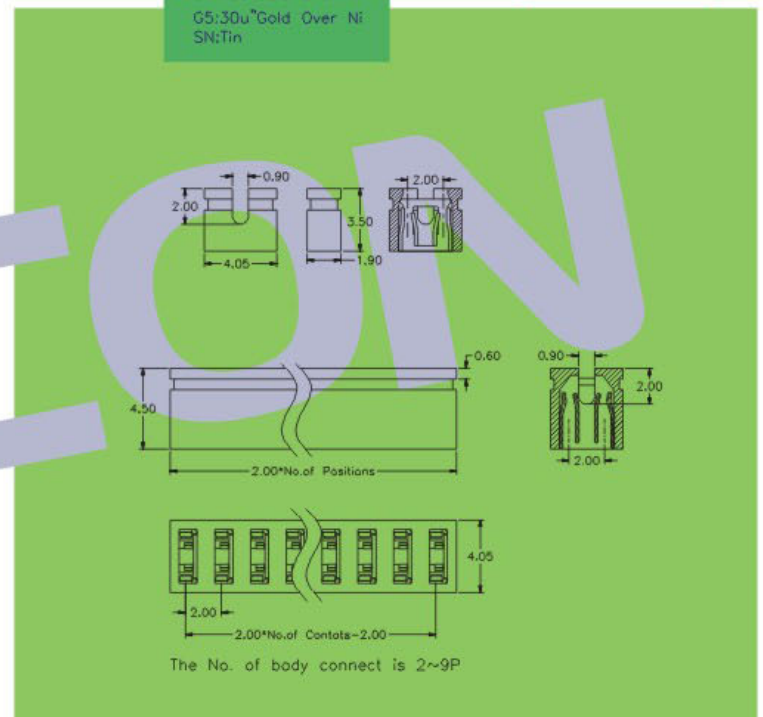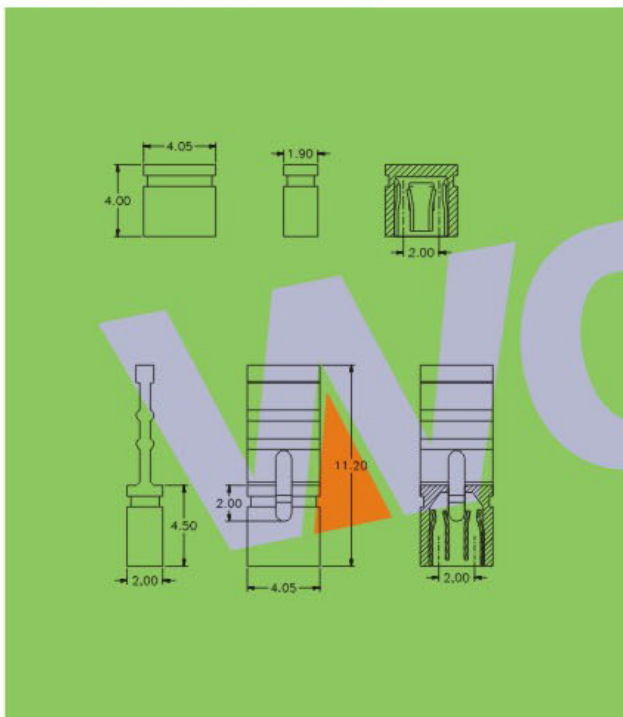

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418