


3110-XXRXXBK00X1



Mated With 5212 Series
 2.54 IDC Socket
 (With Polarization Bump)


2. 54mm Box Header

SPECIFICATIONS




Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T/PBT+30%GF


CAP
 (Option)




3110-XXMXXBK00X1




3110-XXMXXBD00X1



3110-XXSXXBD00X1





3100-XXSXXBK00X1

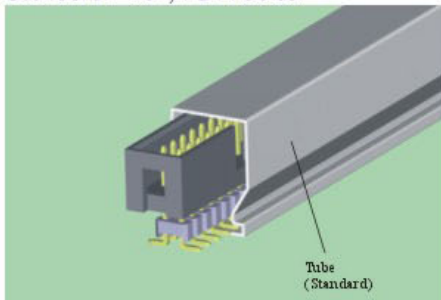

Tube
 (Standard)

3110-XX X XX X XXX X X

- NO.OF PINS**
02~64P
- CONTACT SHAPE**
S: Straight
M: 180°SMT
R: Right Angle
- CONTACT PLATING**
G0: 1u" Gold
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
G6: 20u" Gold
S0: 1u" Gold/Tin
S1: 3u" Gold/Tin
S2: 5u" Gold/Tin
S3: 10u" Gold/Tin
S4: 15u" Gold/Tin
S5: 30u" Gold/Tin
S6: 20u" Gold/Tin
SN: Tin
- INSULATOR COLOR**
B: Black W: White
U: Blue Y: Yellow
R: Red G: Grey(427C)
E: Grey(413C)
- NONE OF PIN**
K05: No of fifth pin
K00: Full Pin
D00: With housing on face
D01: With housing on inverse
- PACKING**
A: Tray T: Tube
R: Tape & Reel

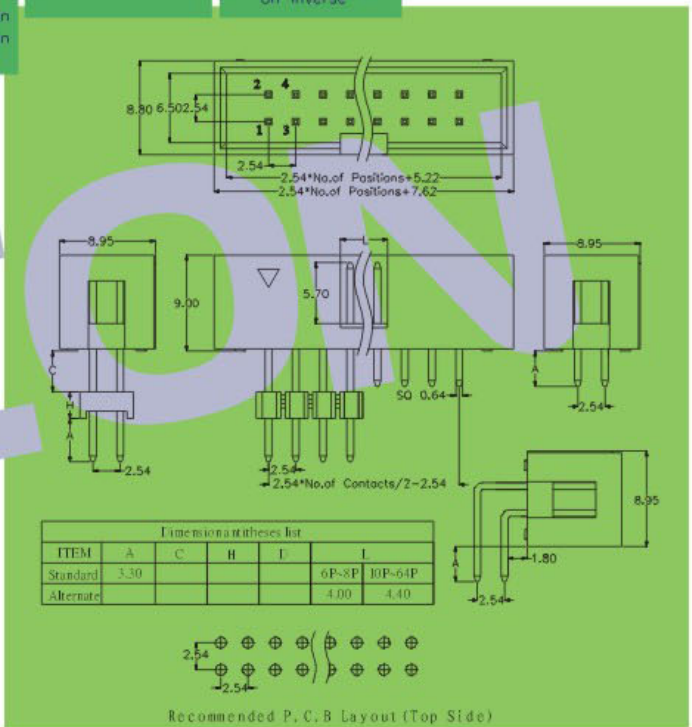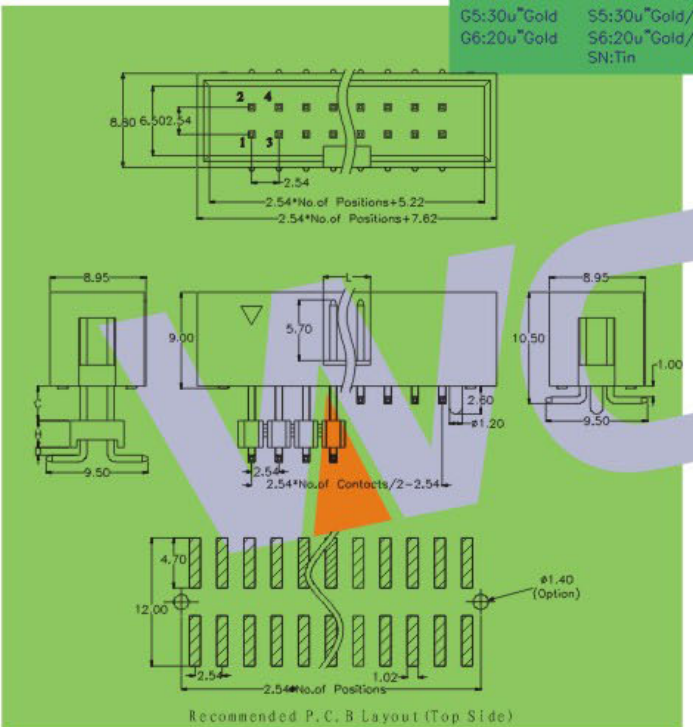

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418