



Mated With 5212 Series
2.54 IDC Socket

2. 54mm Box Header


SPECIFICATIONS



Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T/PBT+30%GF

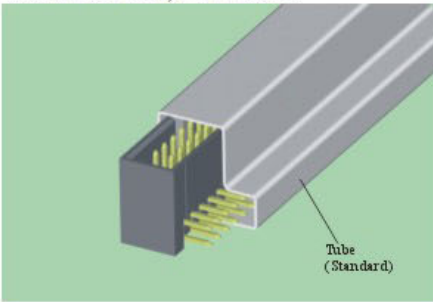





3112-XXRXXBK00X1



3112-XXSXXBK00X1

3112- XX X XX X KXX X 1

NO.OF PINS 02~64P	CONTACT SHAPE S: Straight R: Right Angle	CONTACT PLATING G0:1u" Gold G1:3u" Gold G2:5u" Gold G3:10u"Gold G4:15u"Gold G5:30u"Gold G6:20u"Gold SN: Tin	PLATING S0:1u" Gold/Tin S1:3u" Gold/Tin S2:5u" Gold/Tin S3:10u"Gold/Tin S4:15u"Gold/Tin S5:30u"Gold/Tin S6:20u"Gold/Tin SN: Tin	INSULATOR CLOUR B:Black W:White U:Blue Y:Yellow R:Red G:Grey(427C) E:Grey(413C)	NONE OF PIN K05:No of fifths pin K00:Full Pin	PACKING A:Troy T:Tube R:Tape & Reel
----------------------	--	---	---	---	---	---

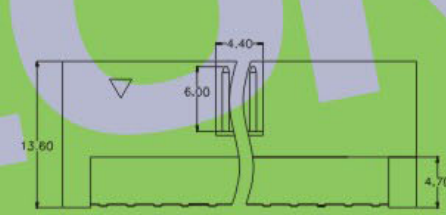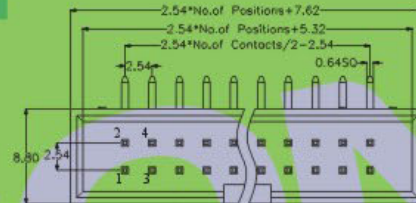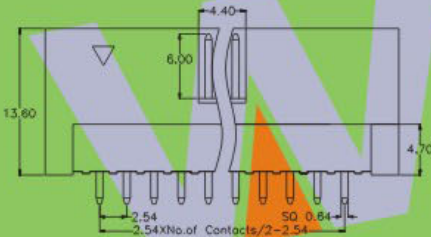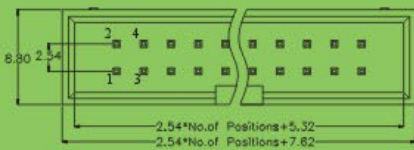

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418