

HSF

NOTES:





Current Rating:3AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40℃ to +105℃

Contact Material:Brass
 Contact plating:Au or Sn Over Ni
 Insulator Material:PA6T+30%G.F(UL94V-0)

Ordering Information

3110-XX M XX B K00 X 2

- | | | | |
|-------------|-------------------|-----------------|-----------------|
| No. of Pins | Contact Plating | Color Insulator | Packing: |
| 6P 24P | G0=Gold Flash | B=Black | T=Tube |
| 8P 26P | G1=3u"Gold | U=Blue | P=Tube+CAP |
| 10P 30P | G2=5u"Gold | G=Gray(427C) | R=Tape&Reel+CAP |
| 12P 34P | G3=10u"Gold | E=Gray(413C) | |
| 14P 40P | G4=15u"Gold | | |
| 16P 50P | G5=30u"Gold | | |
| 18P 60P | S0=Gold Flash/Tin | | |
| 20P 64P | S1=3u"Gold/Tin | | |
| | S2=5u"Gold/Tin | | |
| | S3=10u"Gold/Tin | | |
| | S4=15u"Gold/Tin | | |
| | S5=30u"Gold/Tin | | |
| | SN=Tin | | |

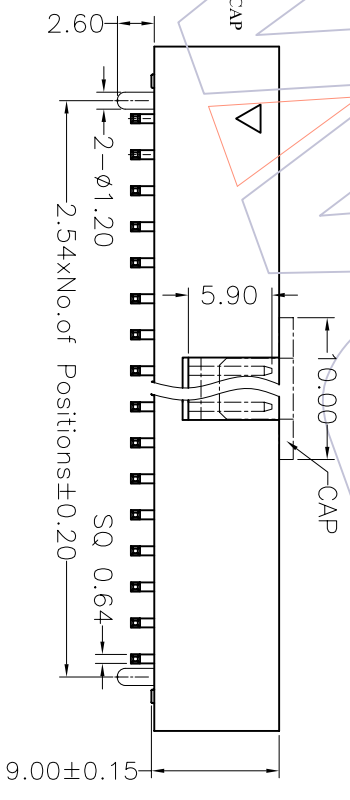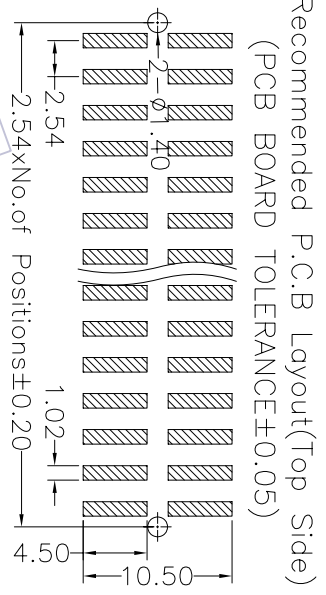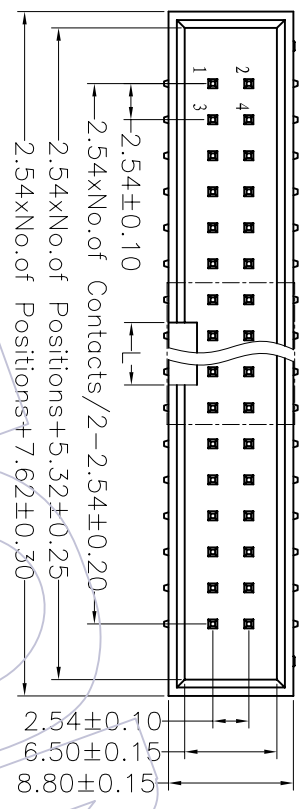

Dimension antitheses list

NO. Pin	L
6P-8P	4.00
10P-64P	4.40

REV	DATE	MODIFICATION DESCRIPTION	CHANGE APPROVE	OPERATION	DRAW	WEIXD	SCALE	UNIT	PART NO.	TITLE:
A0	08/05/08	NEW		XXX ±0.40 XXX ±0.25 XXX ±0.15 Angle ± 3'	DESIGN	08/05/08	2:1	mm	3110-XXMXXBK00X2	2.54 BOX HEADER SMT H=9.0 WITH POST
1					CHECK			A4		Customer NO.
					APPROVE			1/1		

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD