

HSF

NOTES:





Current Rating:3AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40℃ to +105℃

Contact Material:Brass
 Contact plating:Au or Sn Over Ni
 Insulator Material:PBT/PA6T+30%G.F(UL94V-0)

Ordering Information

3110-XX R XX B K00 X 1

- | | | | |
|-------------|-------------------|-----------------|------------|
| No. of Pins | Contact Plating | Color Insulator | Packaging: |
| 6P 24P | G0=Gold Flash | B=Black | A=Tray |
| 8P 26P | G1=3u"Gold | U=Blue | T=Tube |
| 10P 30P | G2=5u"Gold | G=Gray(427C) | |
| 12P 34P | G3=10u"Gold | E=Gray(413C) | |
| 14P 40P | G4=15u"Gold | | |
| 16P 50P | G5=30u"Gold | | |
| 18P 60P | S0=Gold Flash/Tin | | |
| 20P 64P | S1=3u"Gold/Tin | | |
| | S2=5u"Gold/Tin | | |
| | S3=10u"Gold/Tin | | |
| | S4=15u"Gold/Tin | | |
| | S5=30u"Gold/Tin | | |
| | SN=Tin | | |

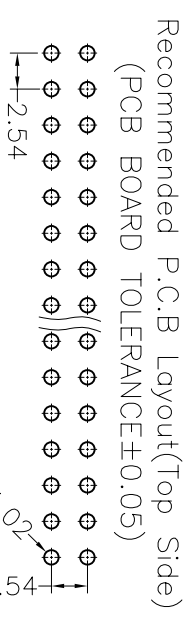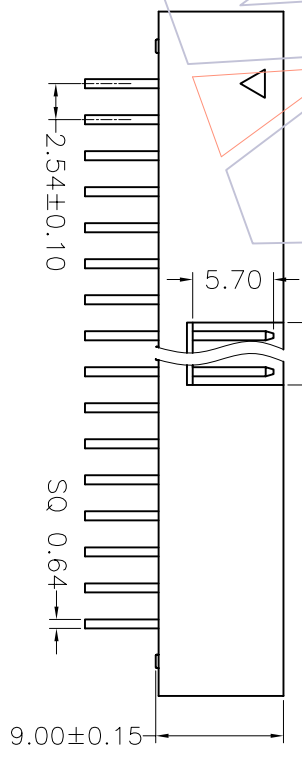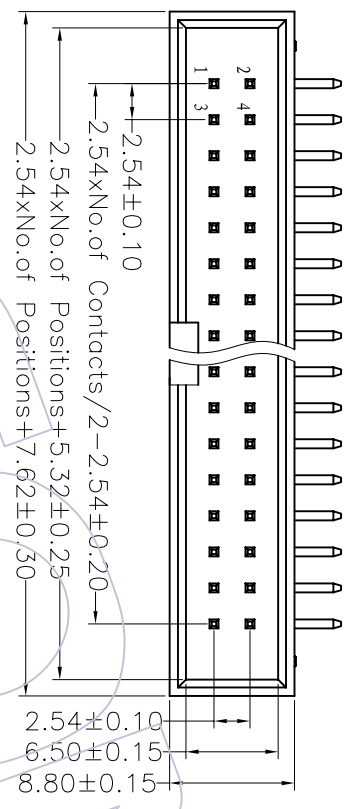

| Dimension antitheses list | |
|---------------------------|------|
| NO. Pin | L |
| 6P-8P | 4.00 |
| 10P-64P | 4.40 |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE APPROVE | OPERATION | DRAW | WEIXD | SCALE | UNIT | SIZE | PART NO. | TITLE: |
|-----|----------|--------------------------|----------------|---|--------|----------|-------|------|------|------------------|---------------------------|
| A0 | 08/05/08 | NEW | | XXX ±0.40 XXX ±0.25 XXX ±0.15 Angle ± 3' | DESIGN | 08/05/08 | 2:1 | mm | A4 | 3110-XXRXXBK00X1 | 2.54 BOX HEADER 90° H=9.0 |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE APPROVE | DIM TOL | CHECK | | PROJ. | | | Customer NO. | |

WCON 维峰五金电子有限公司
 WAFER HARDWARE ELECTRONICS CO.,LTD