



Mated With 5212 Series
2.54 IDC Socket

2.54mm Ejector Header

SPECIFICATIONS



Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage :1000V AC/Minute
 Operation Temperature: -40°C to+105°C
 Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T/PBT+30%GF

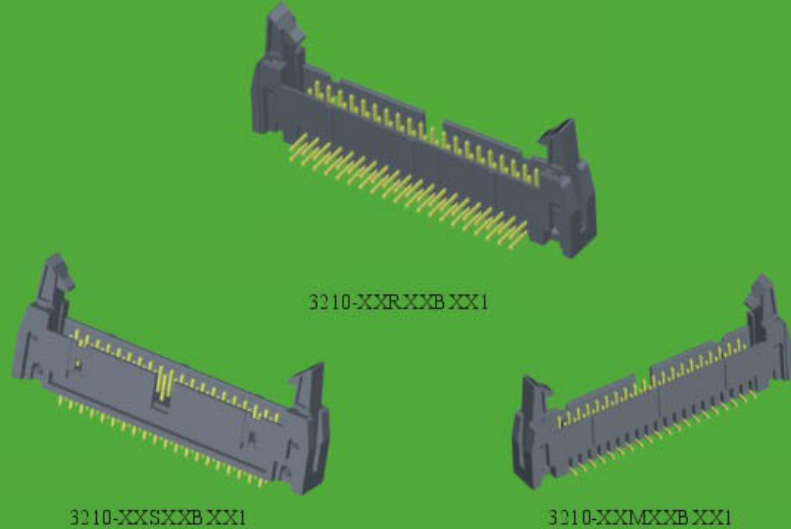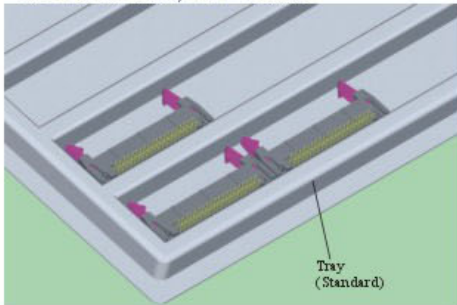

3210-XX X XX B X X 1





NO.OF PINS
06~64P

CONTACT SHAPE
S: Straight
M: 180°SMT
R: Right Angle

CONTACT PLATING
G0: 1u" Gold S0: 1u" Gold/Tin
G1: 3u" Gold S1: 3u" Gold/Tin
G2: 5u" Gold S2: 5u" Gold/Tin
G3: 10u" Gold S3: 10u" Gold/Tin
G4: 15u" Gold S4: 15u" Gold/Tin
G5: 30u" Gold S5: 30u" Gold/Tin
G6: 20u" Gold S6: 20u" Gold/Tin
SN: Tin

LATCH SHAPE
L: Long Latch
S: Short Latch
N: No Latch

PACKING
A: Tray T: Tube
R: Tape & Reel

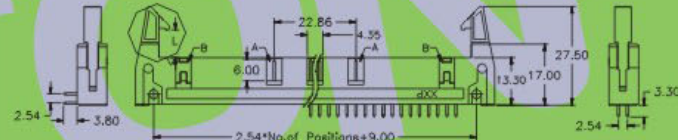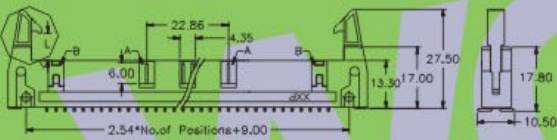

No side slot "A" and "B" from 6 to 16Pin
 No side slot "A" from 18 to 58Pin



Recommended P. C. B Layout (Top Side)



Recommended P. C. B Layout (Top Side)

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418