
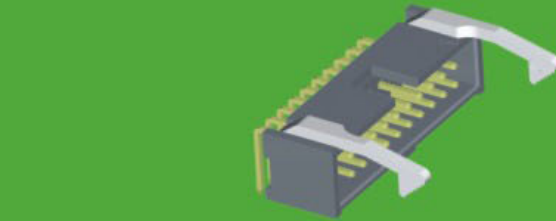


Mated With 5212 Series
 2.54 IDC Socket


2.54mm Ejector Header

SPECIFICATIONS

Current Rating: 3.0AMP
 Contact Resistance: 20m Ω Max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage : 350V AC/Minute
 Operation Temperature: -40°C to +105°C
 Contact: Brass, Latch : Zinc Alloy
 Contact plating: Au or Sn Over Ni
 Latch plating: Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T/PBT+30%GF

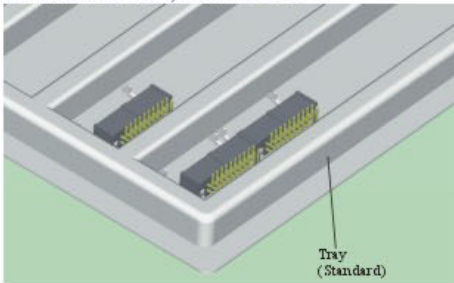

3211-XXRXXBXX1



3211-XXSXXBXX1



3211-XXMXXBXX1

3211-XX X XX B X X 1



NO.OF PINS
 06~64P

CONTACT SHAPE
 S: Straight
 M: 180° SMT
 R: Right Angle

CONTACT PLATING
 G0: 1u" Gold S0: 1u" Gold/Tin
 G1: 3u" Gold S1: 3u" Gold/Tin
 G2: 5u" Gold S2: 5u" Gold/Tin
 G3: 10u" Gold S3: 10u" Gold/Tin
 G4: 15u" Gold S4: 15u" Gold/Tin
 G5: 30u" Gold S5: 30u" Gold/Tin
 G6: 20u" Gold S6: 20u" Gold/Tin
 SN: Tin

LATCH SHAPE
 L: Long Latch
 S: Short Latch
 N: No Latch

PACKING
 A: Tray T: Tube
 R: Tape & Reel

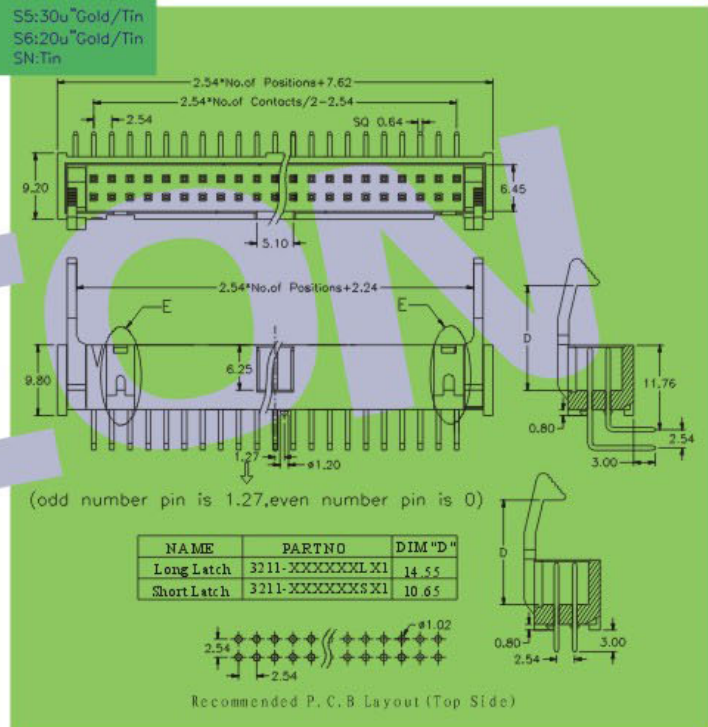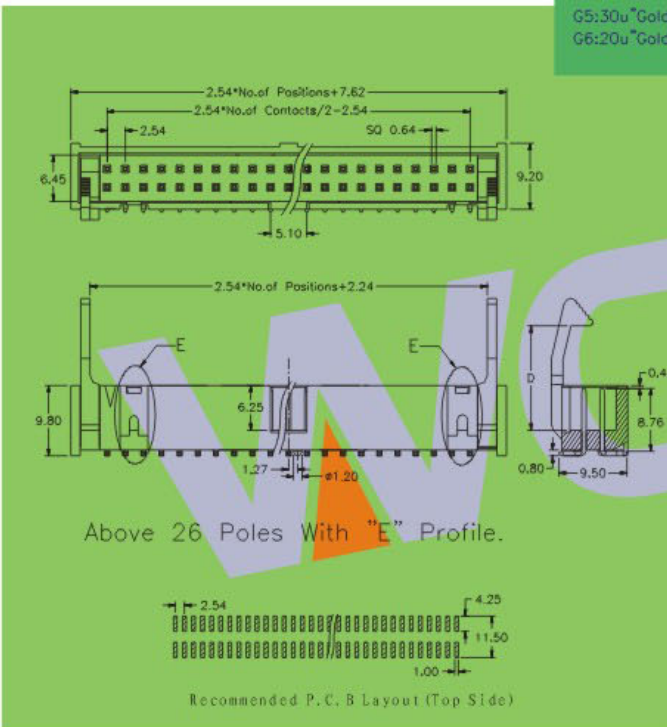

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418