

HSF

NOTES:


Current Rating: 1.0AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 500MΩ min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: PA6T+30%GF(UL94V-0)

Ordering Information

3230-XX M XX B S X 1

- | | | | |
|-------------|-----------------|-----------------|---------|
| No. of Pins | Contact Plating | Color Insulator | Packing |
| 10 30 | G0=Gold Flash | B=Black | A=Tray |
| 14 34 | G1=3u"Gold | U=Blue | T=Tube |
| 16 40 | G2=5u"Gold | G=Gray(427C) | |
| 20 44 | G3=10u"Gold | E=Gray(413C) | |
| 24 50 | G4=15u"Gold | | |
| 26 60 | G5=30u"Gold | | |
- S0=Gold Flash/Tin
 S1=3u"Gold/Tin
 S2=5u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin

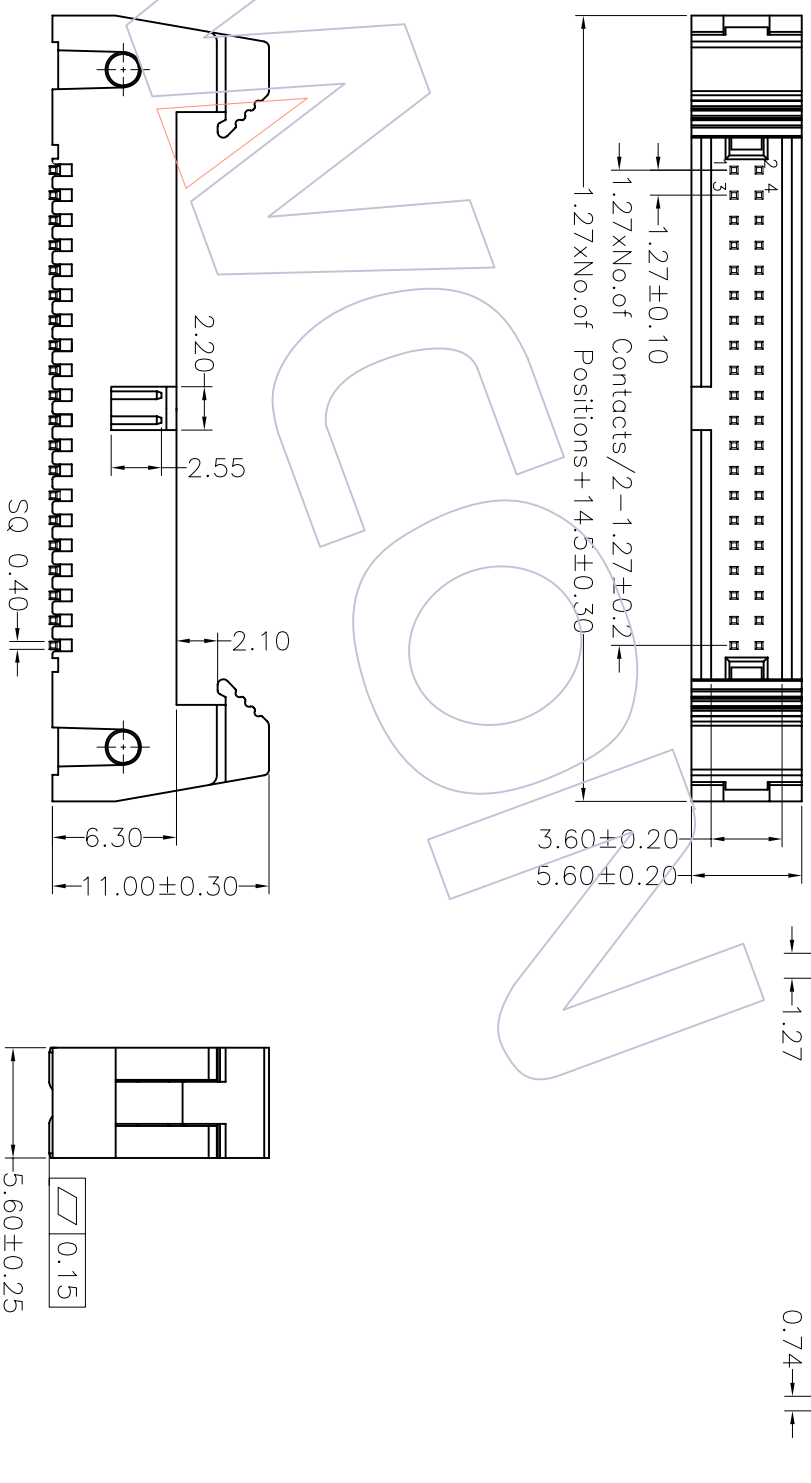

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

WCON 维峰五金电子有限公司
 WAFE HARDWARE ELECTRONICS CO. LTD

OPERATION	DRAW	WEIXD	SCALE	PART NO.
X.X	DESIGN	08/05/09	2.5:1	3230-XXMXXBSX1
X.XX	CHECK		mm	1.27 EJECTOR HEADER SMT
X.XXX	APPROVE		A4	
Angle			1/1	
± .3'			PROJ.	Customer NO.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/05/09	NEW		