

**HSF**

**NOTES:**




Current Rating:1.0AMP  
 Contact Resistance:20mΩ max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:500MΩ min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact plating:Au or Sn Over Ni  
 Insulator Material:PA6T+30%GF(UL94V-0)

**Ordering Information**

3230-XX R XX B S X 1

- |            |                   |                 |         |
|------------|-------------------|-----------------|---------|
| No.of Pins | Contact Plating   | Color Insulator | Packing |
| 10 30      | G0=Gold Flash     | B=Black         | A=Tray  |
| 14 34      | G1=3u"Gold        | U=Blue          | T=Tube  |
| 16 40      | G2=5u"Gold        | G=Gray(427C)    |         |
| 20 44      | G3=10u"Gold       | E=Gray(413C)    |         |
| 24 50      | G4=15u"Gold       |                 |         |
| 26 60      | G5=30u"Gold       |                 |         |
|            | S0=Gold Flash/Tin |                 |         |
|            | S1=3u"Gold/Tin    |                 |         |
|            | S2=5u"Gold/Tin    |                 |         |
|            | S3=10u"Gold/Tin   |                 |         |
|            | S4=15u"Gold/Tin   |                 |         |
|            | S5=30u"Gold/Tin   |                 |         |
|            | SN=Tin            |                 |         |

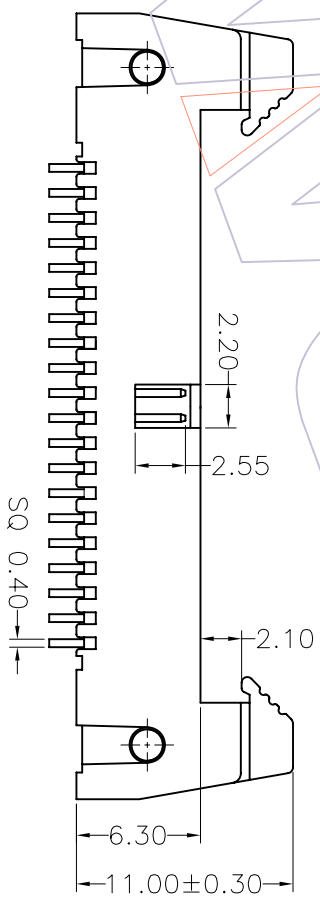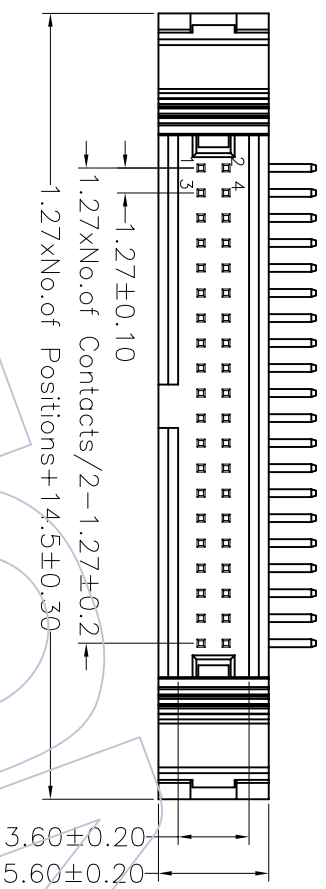

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	PART NO.	TITLE:
A0	08/05/09	NEW			X.X ±0.40	DESIGN	08/05/09	2.5:1	3230-XXRXXBSX1	1.27 EJECTOR HEADER 90°
					X.XX ±0.25	CHECK		A4		
					Angle ± 3'	APPROVE		1/1		
					DIM TOL			PROJ.	Customer NO.	

**WCON** 维峰五金电子有限公司  
 WAFER HARDWARE ELECTRONICS CO.,LTD