

HSF

NOTES:


Current Rating:1.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:500MΩ min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact plating:Au or Sn Over Ni
 Insulator Material:PA6T+30%GF(UL94V-0)

Ordering Information

3230-XX S XX B S X 1

- No.of Pins Contact Plating Color Insulator Packing
- 10 30 G0=Gold Flash B=Black A=Tray
- 14 34 G1=3u"Gold U=Blue T=Tube
- 16 40 G2=5u"Gold G=Gray(427C)
- 20 44 G3=10u"Gold E=Gray(413C)
- 24 50 G4=15u"Gold
- 26 60 G5=30u"Gold
- S0=Gold Flash/Tin
- S1=3u"Gold/Tin
- S2=5u"Gold/Tin
- S3=10u"Gold/Tin
- S4=15u"Gold/Tin
- S5=30u"Gold/Tin
- SN=Tin

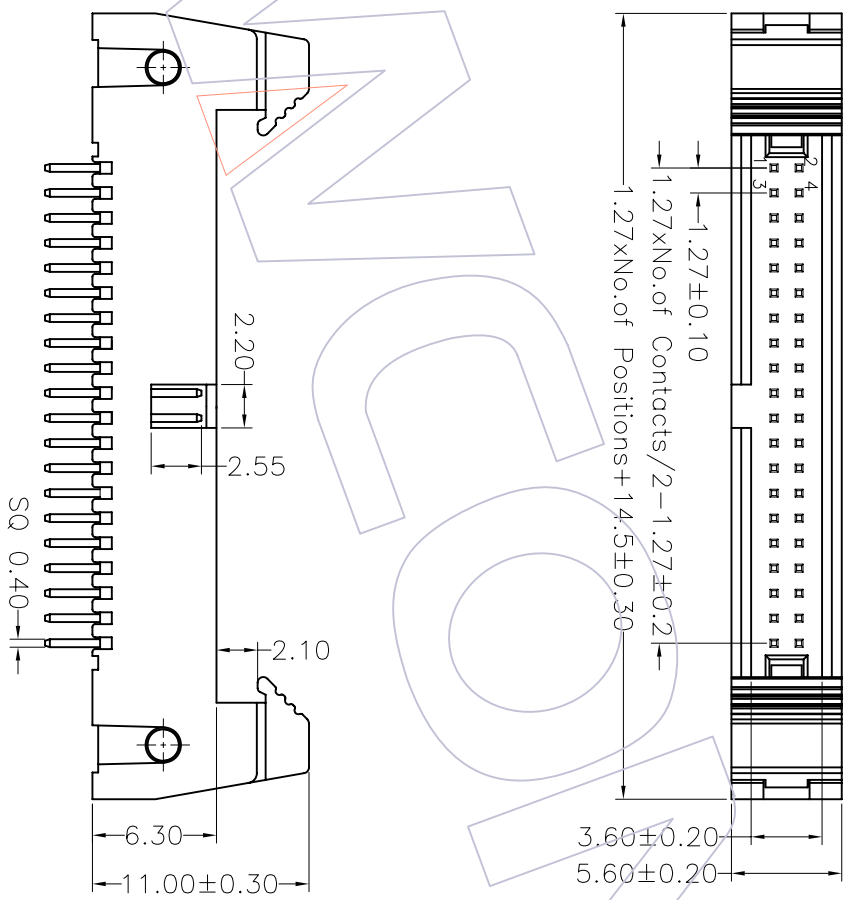

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	PART NO.	TITLE:
A0	08/05/09	NEW			X.X ±0.40	DESIGN	08/05/09	2.5:1	3230-XXSXXBSX1	1.27 EJECTOR HEADER 180°
					X.XX ±0.25	CHECK		A4		
					Angle ± 3'	APPROVE		1/1		
					DIM TOL	PROJ.			Customer NO.	

WCON 维峰五金电子有限公司
 WAFE HARDWARE ELECTRONICS CO. LTD