
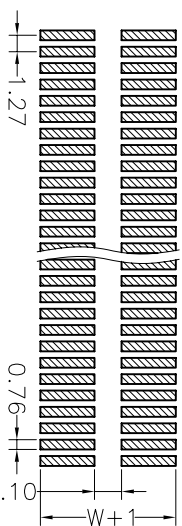


HSP

NOTES:

Current Rating:1.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40°C to +105°C



Contact Material:Brass
 Contact plating:Au or Sn Over Ni
 Insulator Material:PA6T+30%GF(Ul94V-0)

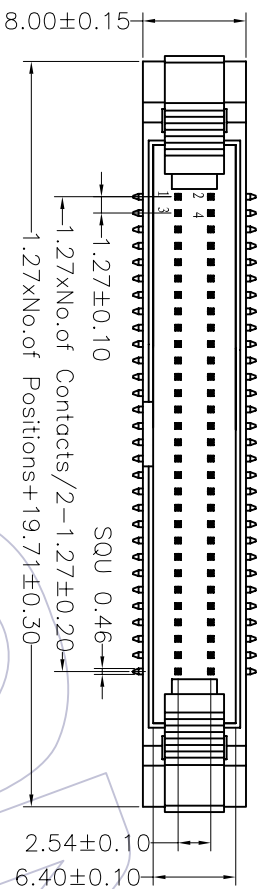

Ordering Information

3240-XX M XX BS X 1

- | | | | |
|------------|-------------------|-----------------|---------|
| No.of Pins | Contact Plating | Color Insulator | Packing |
| 10 34 | G0=Gold Flash | B=Black | A=Tray |
| 12 40 | G1=3u"Gold | U=Blue | T=Tube |
| 14 44 | G2=5u"Gold | W=White | |
| 16 50 | G3=10u"Gold | | |
| 20 60 | G4=15u"Gold | | |
| 24 64 | G5=30u"Gold | | |
| 26 80 | S0=Gold Flash/Tin | | |
| 30 100 | S1=3u"Gold/Tin | | |
| 32 | S2=5u"Gold/Tin | | |
| | S3=10u"Gold/Tin | | |
| | S4=15u"Gold/Tin | | |
| | S5=30u"Gold/Tin | | |
| | SN=Tin | | |

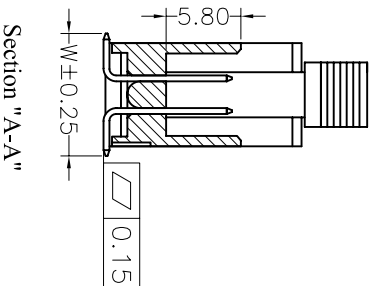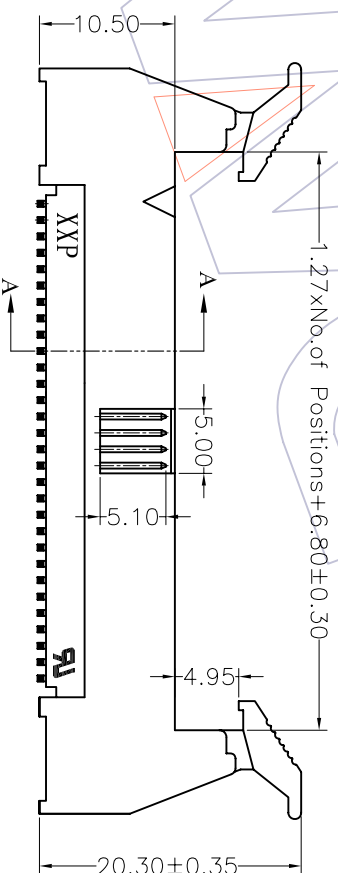

Dimension antitheses list	
ITEM	W
Standard	9.50
Alternate	

OPERATION	DRAW	WEIXD	SCALE	1:1
DESIGN	DESIGN		UNIT	mm
CHECK	CHECK		SIZE	A4
APPROVE	APPROVE		SHEET	1/1
			PROJ.	Customer NO.

Part No.	3240-XXMXXBSX1
Title:	1.27*2.54 EJECTOR HEADER SMT

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

H A0 08/05/13 NEW DATE MODIFICATION DESCRIPTION CHANGE APPROVE DIM TOL APPRVE

1 2 3 4 5 6 7 8 9 10