HSF

NOTES:
Current Rating:1.0AMP
Contact Resistance:20mΩ max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:−40℃ to +105℃

Contact Material:Brass
Contact plating:Au or Sn Over Ni
Insulator Material:PA6T+30%GF(UL94V−0)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

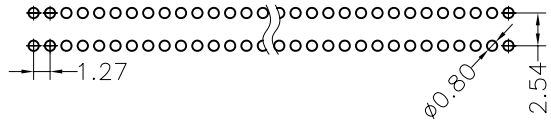

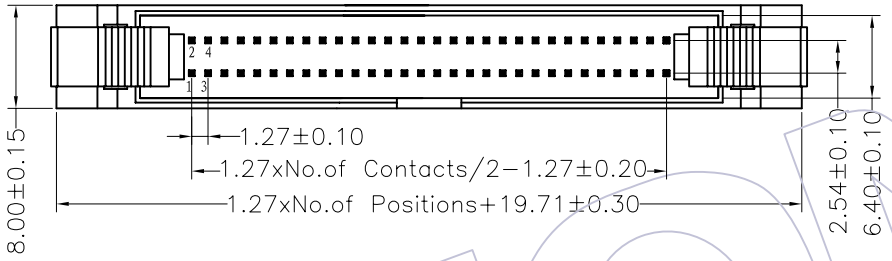

Ordering Information

3240- XX S XX B S X 1

No.of Pins	Contact Plating	Color Insulator	Packing
10 30	G0=Gold Flash	B=Black	A=Tray
12 32	G1=3u"Gold	U=Blue	T=Tube
14 34	G2=5u"Gold	W=White	
16 40	G3=10u"Gold		
20 44	G4=15u"Gold		
24 50	G5=30u"Gold		
26 60	S0=Gold Flash/Tin		
64	S1=3u"Gold/Tin		
80	S2=5u"Gold/Tin		
100	S3=10u"Gold/Tin		
	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		
	SN=Tin		

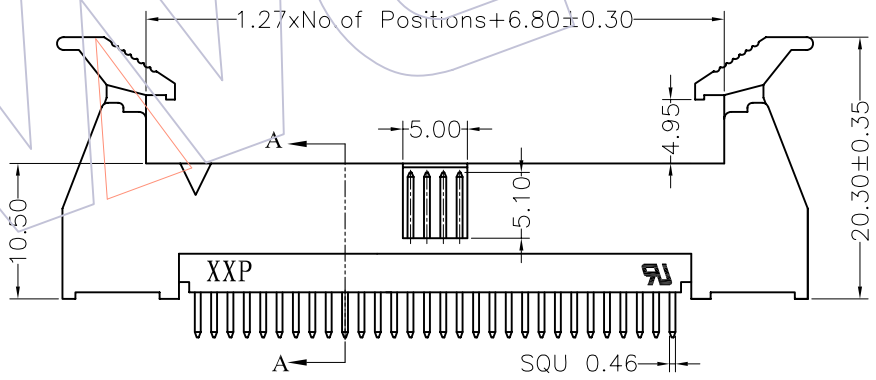

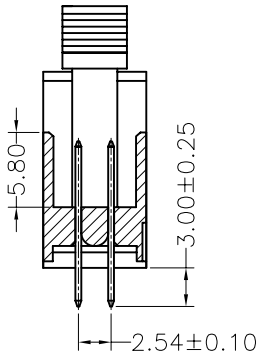

Section "A-A"

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/05/13	NEW	———	———

OPERATION		DRAW	WEIXD	08/05/13
X.X	±0.40	DESIGN		
X.XX	±0.25			
X.XXX	±0.15	CHECK		
Angle	± 3°			
DIM	TOL	APPROVE		

SCALE	1:1	WCON 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO	
UNIT	mm		
SIZE	A4	PART NO.	3240-XXSXXBSX1
SHEET	1/1	TITLE:	1.27*2.54 EJECTOR HEADER 180° DIP
PROJ.		Customer NO.	