

HSP

NOTES:






Current Rating:1.5AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact plating:Au or Sn Over Ni
 Insulator Material:PA6T+30%GF(UL94V-0)

Ordering Information

3220 - XX S XX B X X 1

No.of Pins	Contact Plating	Insulator Color	Latch type	Packing
08 30	G0=Gold Flash	B=Black	L=Long Latch	A=Tray
10 34	G1=3u"Gold	U=Blue	G=Grey(427C)	T=Tube
14 40	G2=5u"Gold	G=Grey(427C)	S=Short Latch	
16 44	G3=10u"Gold	F=Grey(413C)		
20 50	G4=15u"Gold			
24 60	G5=30u"Gold			
26 64	S0=Gold Flash/Tin			
68	S1=3u"Gold/Tin			
	S2=5u"Gold/Tin			
	S3=10u"Gold/Tin			
	S4=15u"Gold/Tin			
	S5=30u"Gold/Tin			
	SN=Tin			

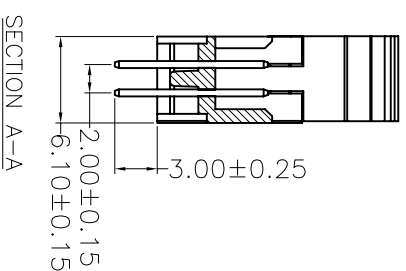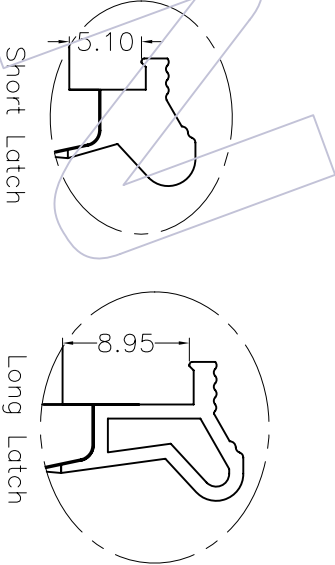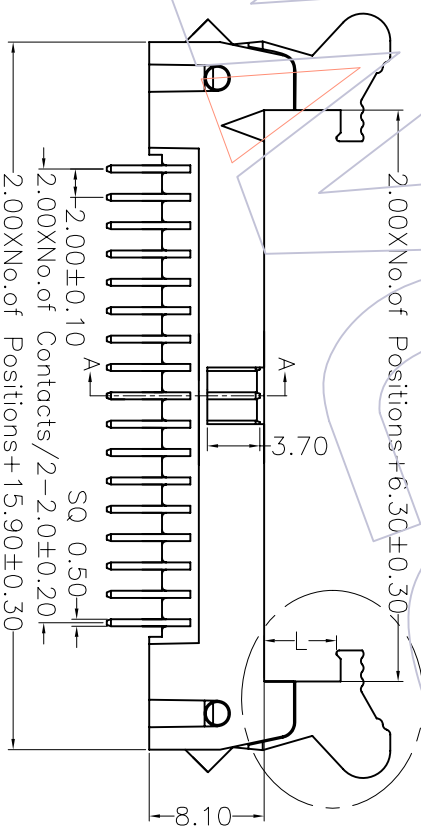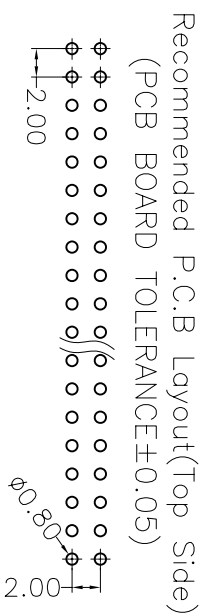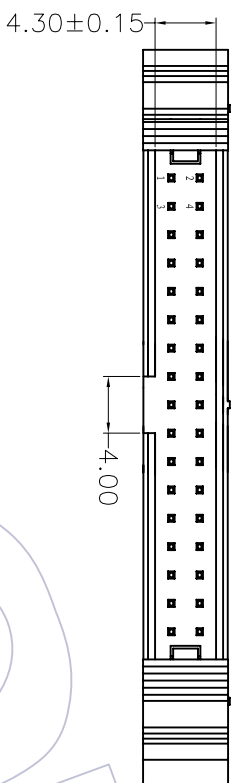

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WEIXD	08/05/10	SCALE		PART NO.	TITLE:
					XXX	±0.40				UNIT	mm		
A0	08/05/10	NEW			XXX	±0.25	DESIGN					3220-XXSXXBXX1	2.00 EJECTOR HEADER 180°
					Angle	± 3'	CHECK						
					DIM	TOL	APPROVE						

WCON 维峰五金电子有限公司
 WAFER HARDWARE ELECTRONICS CO.,LTD