

HSP


NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstand Voltage: 1000V AC/Minute
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Sn or Au Over Ni
 Insulator Material: PA6T+30%GF(UL94V-0)
 No side slot "A" and "B" from 6 to 16Pin
 No side slot "A" from 18 to 58Pin

Ordering Information

3210-XX M XX B X X 1

No. of Pins Contact Plating Insulator Color Latch Type Packing
 06 24 G0=Gold Flash B=Black L=Long Latch A=Tray
 08 26 G1=3u"Gold U=Blue S=Short Latch T=Tube
 10 30 G2=5u"Gold G=Grey(427C) N=Without Latch E=Grey(413C)
 12 34 G3=10u"Gold
 14 40 G4=15u"Gold
 16 50 G5=30u"Gold
 18 60 S0=Gold Flash/Tin
 20 64 S1=3u"Gold/Tin
 S2=5u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin

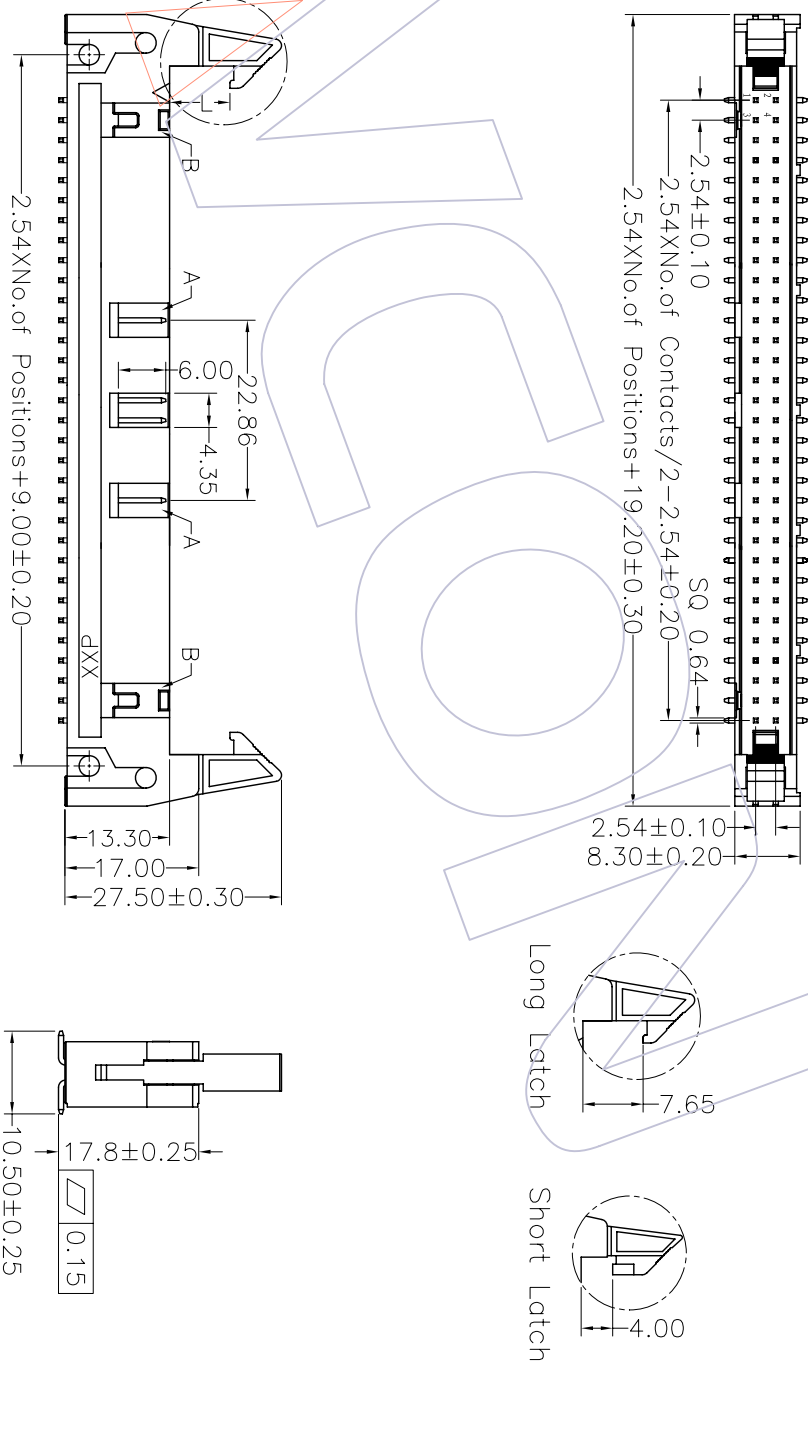

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	PART NO.	TITLE:
A0	08/05/12	NEW			OPERATION X.X ±0.40 X.XX ±0.25 X.XXX ±0.15 Angle ± .3° DIM TOL	DESIGN CHECK	08/05/12	1:1 mm A4	3210-XXMXXBXX1	2.54 EJECTOR HEADER SMT
1										

WCON 维峰五金电子有限公司
 WAFE HARDWARE ELECTRONICS CO. LTD