


HSF

NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstand Voltage: 1000V AC/Minute
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Sn or Au Over Ni
 Insulator Material: PBT or PA6T+30%GF(UL94V-0)
 No side slot "A" and "B" from 6 to 16Pin
 No side slot "A" from 18 to 58Pin

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

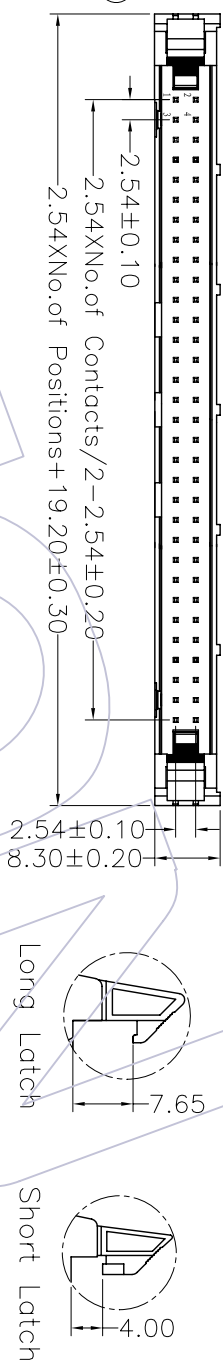


Long Latch

Short Latch

Ordering Information

3210-XX S XX B X X 1

- | | | | | |
|------------|-------------------|-----------------|-----------------|---------|
| No.of Pins | Contact Plating | Insulator Color | Latch Type | Packing |
| 06 24 | G0=Gold Flash | B=Black | L=Long Latch | A=Tray |
| 08 26 | G1=3u"Gold | U=Blue | S=Short Latch | T=Tube |
| 10 30 | G2=5u"Gold | G=Grey(427C) | N=Without Latch | |
| 12 34 | G3=10u"Gold | E=Grey(413C) | | |
| 14 40 | G4=15u"Gold | | | |
| 16 50 | G5=30u"Gold | | | |
| 18 60 | S0=Gold Flash/Tin | | | |
| 20 64 | S1=3u"Gold/Tin | | | |
| | S2=5u"Gold/Tin | | | |
| | S3=10u"Gold/Tin | | | |
| | S4=15u"Gold/Tin | | | |
| | S5=30u"Gold/Tin | | | |
| | SN=Tin | | | |

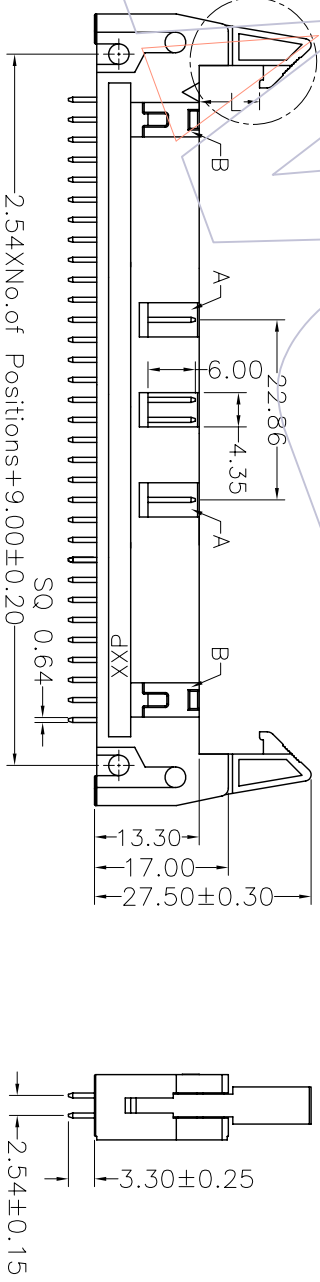

| | | | | | | | | | | |
|-----|----------|--------------------------|--------|---------|--|-----------------|----------|-----------------|---------------|--------------------------|
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE | OPERATION | DRAW | WEIXD | SCALE | PART NO. | TITLE: |
| A0 | 08/05/12 | NEW | | | XXX ±0.40 XXX ±0.25 XXX ±0.15 Angle ± .3' | DESIGN CHECK | 08/05/12 | 1:1 mm A4 | 3210-XXXXBXX1 | 2.54 EJECTOR HEADER 180° |
| 1 | | | | | | | | | | |

WCON 维峰五金电子有限公司
 WAFER HARDWARE ELECTRONICS CO.,LTD