WCON®
HTTP:WWW.WAFE-CHINA.COM




# 2.00mm Ejector Header

## SPECIFICATIONS

FILE NO.E248993

Current Rating: 2.0AMP
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage : 500V AC/Minute
Operation Temperature: −40°C to+105°C
Contact Material: Brass
Contact plating: Au or Sn Over Ni
Insulator Material: Polyester (UL94V−0)
Standard: PBT/PA6T+30%GF

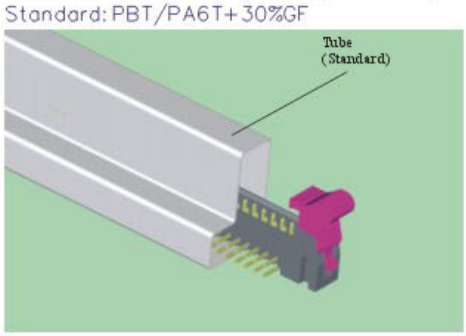


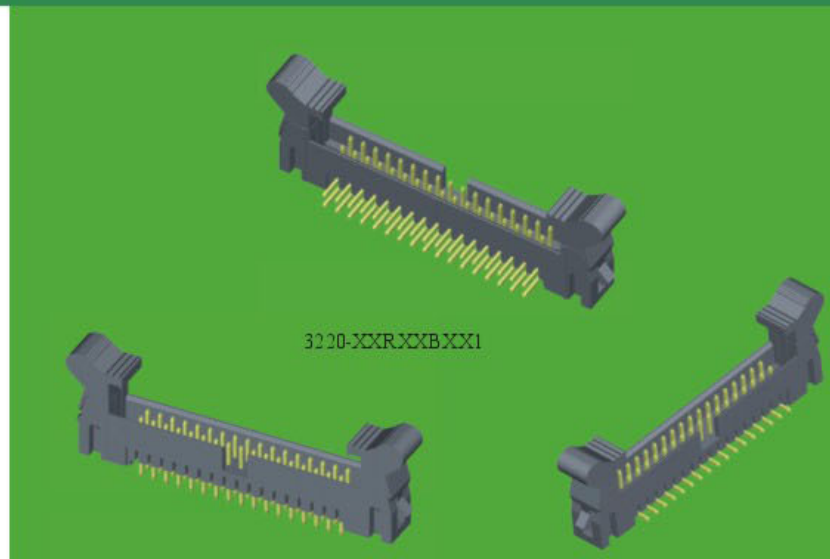


## 3220-XX X XX B X X 1

- **XX** — NO.OF PINS 06~64P
- **X** — CONTACT SHAPE
  - S:Straight
  - M:180°SMT
  - R:Right Angle
- **XX** — CONTACT PLATING
  - G0:1u" Gold / S0:1u" Gold/Tin
  - G1:3u" Gold / S1:3u" Gold/Tin
  - G2:5u" Gold / S2:5u" Gold/Tin
  - G3:10u"Gold / S3:10u"Gold/Tin
  - G4:15u"Gold / S4:15u"Gold/Tin
  - G5:30u"Gold / S5:30u"Gold/Tin
  - G6:20u"Gold / S6:20u"Gold/Tin
  - SN:Tin
- **X** — LATCH SHAPE
  - L:Long Latch
  - S:Short Latch
  - N:No Latch
- **X** — PACKING
  - A:Tray T:Tube
  - R:Tape & Reel

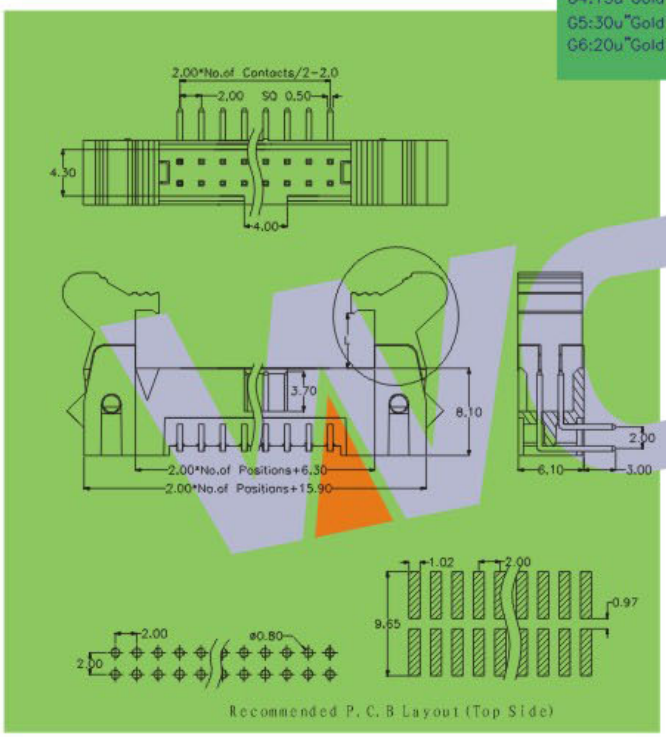


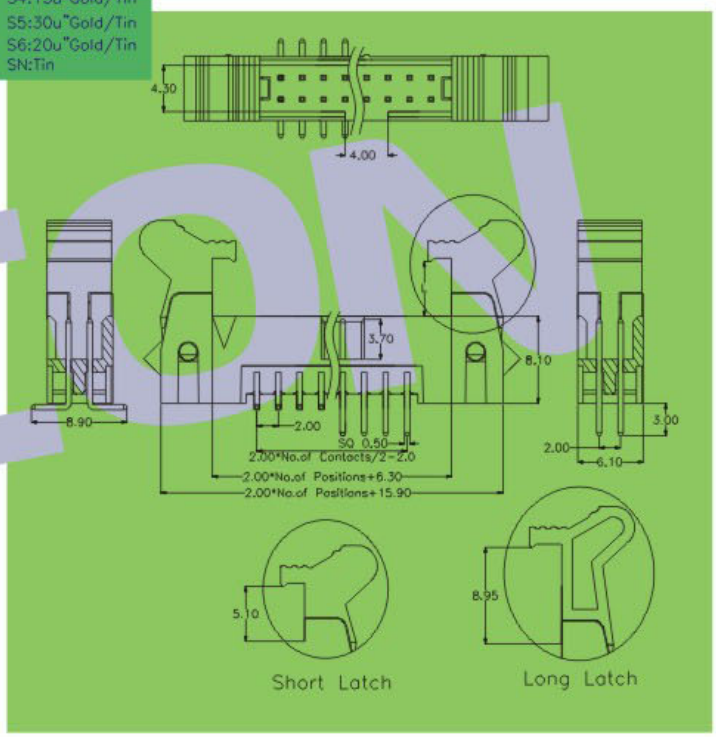


※ ※INNOVATION AND DEVELOPMENT ※ ※CONTINUAL IMPROVEMENT ※ ※QUALITY FOREMOST ※ ※CUSTOMER SATISFACTION ※ ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com
WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418