




2. 54mm DIN 41612 B Type Male And Female


SPECIFICATIONS




Current Rating: 3.0AMP
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage :1000V AC/Minute
 Operation Temperature: -55°C to +105°C
 Contact Material: Brass/Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT+30%GF

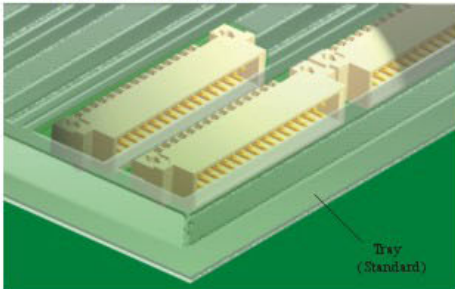

B TYPE DIN 41612 FEMALE 2X16PIN AND 2X32PIN

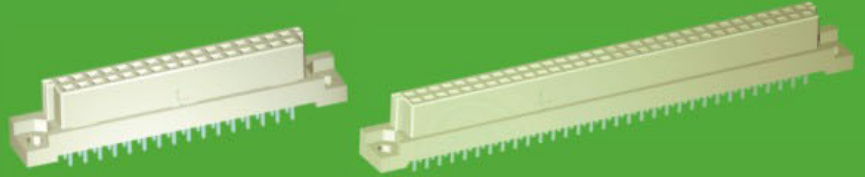


B TYPE DIN MALE
 MATE FEMALE

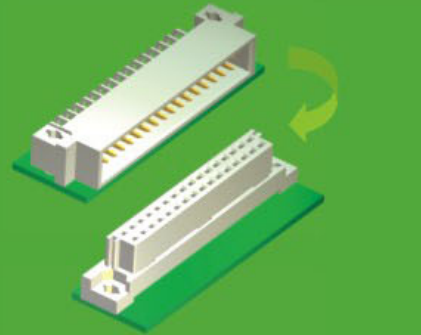

3410-2 XX X X X XX N A 1

| | | | | |
|-----------------------------------|--------------------------------|----------------------------|---------------------------|---|
| NO. OF PINS 2X16P and 2X32P | TERMINAL ALLOT B=a+b D=a | TYPE F=Female M=Male | T TYPE S=180° R=90° | CONTACT PLATING G0:1u" Gold S0:1u" Gold/Tin G1:3u" Gold S1:3u" Gold/Tin G2:5u" Gold S2:5u" Gold/Tin G3:10u" Gold S3:10u" Gold/Tin G4:15u" Gold S4:15u" Gold/Tin G5:30u" Gold S5:30u" Gold/Tin G6:20u" Gold S6:20u" Gold/Tin SN: Tin |
|-----------------------------------|--------------------------------|----------------------------|---------------------------|---|

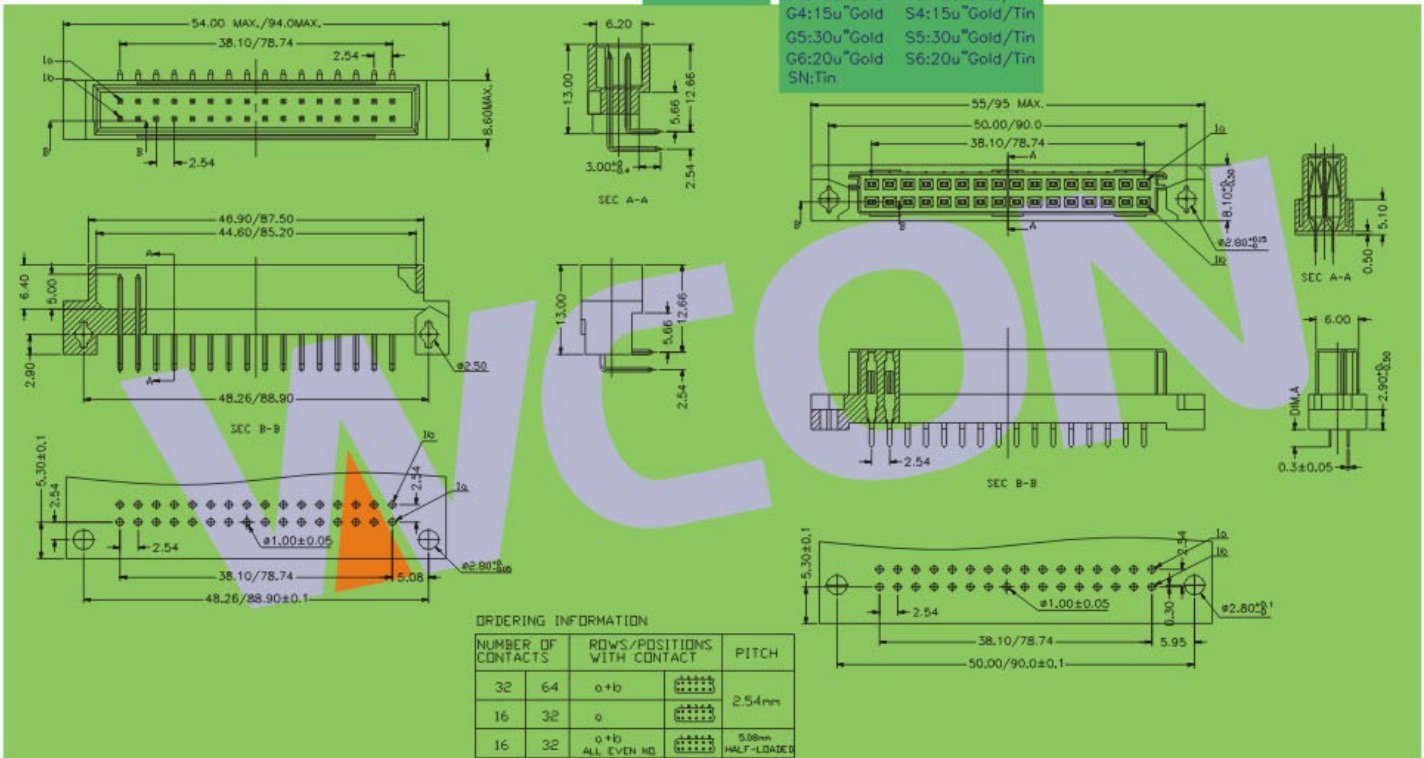

ORDERING INFORMATION

| NUMBER OF CONTACTS | ROWS/POSITIONS WITH CONTACT | PITCH |
|--------------------|-----------------------------|------------------|
| 32 | 64 a+b | 2.54mm |
| 16 | a | 2.54mm |
| 16 | a+b ALL EVEN NO. | 5.08mm HALF-LOAD |

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418