



## 2.54mm DIN 41612 IDC Type Female Connector

### SPECIFICATIONS

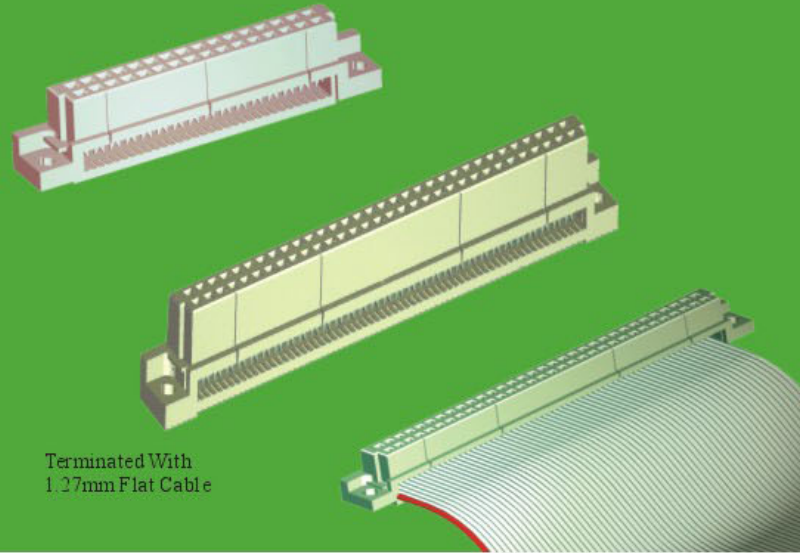

Current Rating: 1.0AMP  
 Contact Resistance: 30mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : 1000V AC/Minute  
 Operation Temperature: -55°C to +105°C  
 Contact Material: Brass  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT+30%GF

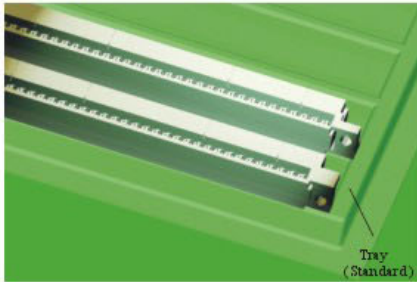


## 3410-2XX XFI XXNA1

NO. OF PINS  
2X16P and  
2X32P

TERMINAL ALLOT  
B=a+b  
D=a

CONTACT PLATING  
 G0:1u" Gold S0:1u" Gold/Tin  
 G1:3u" Gold S1:3u" Gold/Tin  
 G2:5u" Gold S2:5u" Gold/Tin  
 G3:10u" Gold S3:10u" Gold/Tin  
 G4:15u" Gold S4:15u" Gold/Tin  
 G5:30u" Gold S5:30u" Gold/Tin  
 G6:20u" Gold S6:20u" Gold/Tin  
 SN: Tin

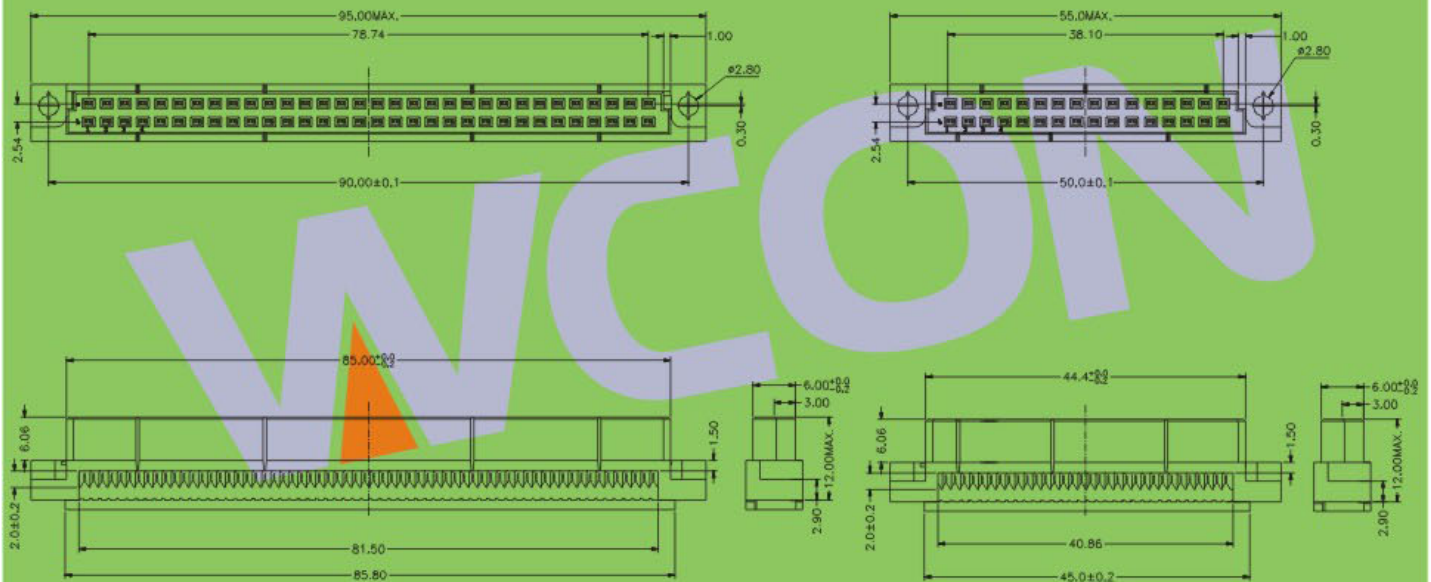

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418