WCON®
HTTP:WWW.WAFE-CHINA.COM

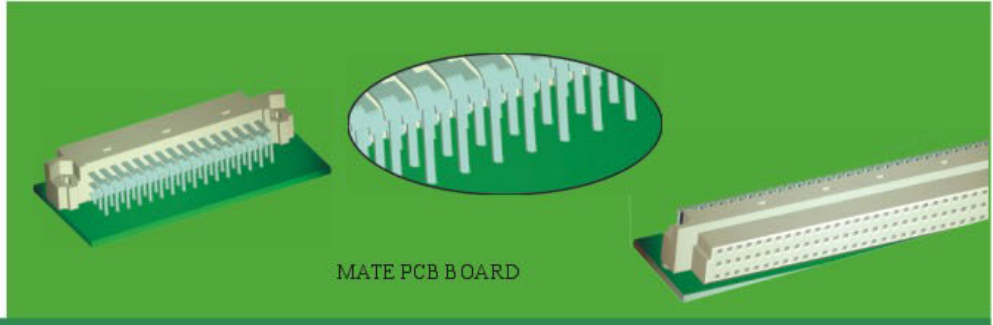

2.54mm DIN 41612 R Type Angle Female Connector

SPECIFICATIONS

FILE NO.E248993

Current Rating: 3.0AMP
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage : 1000V AC/Minute
Operation Temperature: −55°C to+105°C
Contact Material: Phosphor Bronze
Contact plating: Au or Sn Over Ni
Insulator Material: Polyester (UL94V−0)
Standard: PBT+30%GF

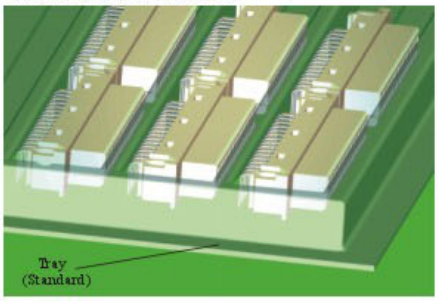

2.54mm DIN41612 R TYPE ANGLE FEMALE 3X16P CONNECTOR

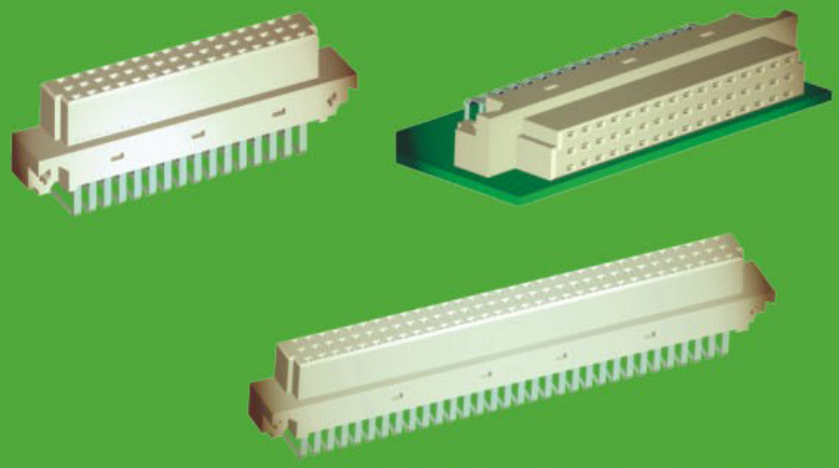

2.54mm DIN41612 R TYPE ANGLE FEMALE 3X32P CONNECTOR

3410-3 XX X F R XX N A 1

NO.OF PINS
3x16P and
3x32P

TERMINAL ALLOT
A=a+b+c
B=a+b
C=a+c
D=a
E=5.08(ii)Ⅱ:a+b+c
F=5.08(ii)Ⅱ:a+c

CONTACT PLATING

G0:1u" Gold	S0:1u" Gold/Tin
G1:3u" Gold	S1:3u" Gold/Tin
G2:5u" Gold	S2:5u" Gold/Tin
G3:10u"Gold	S3:10u"Gold/Tin
G4:15u"Gold	S4:15u"Gold/Tin
G5:30u"Gold	S5:30u"Gold/Tin
G6:20u"Gold	S6:20u"Gold/Tin
SN:Tin	

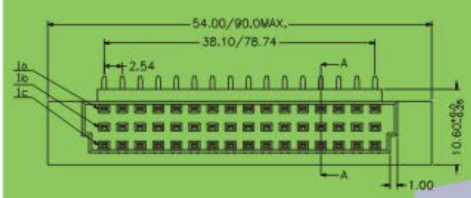



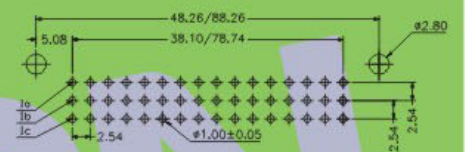

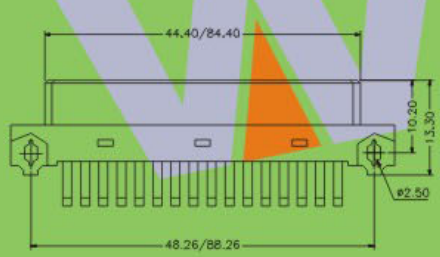



ORDERING INFORMATION

NUMBER OF CONTACTS		ROWS/POSITIONS WITH CONTACT		PITCH
48	96	a+b+c		2.54mm
32A	64A	a+c		
32B	64B	a+b		
16	32	a		
24	48	a+b+c ALL EVEN NO.		5.08mm HALF-LOADED
16	32	a+c ALL EVEN NO.		

※ ※INNOVATION AND DEVELOPMENT ※ ※CONTINUAL IMPROVEMENT ※ ※QUALITY FOREMOST ※ ※CUSTOMER SATISFACTION ※ ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com
WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418