


2.54mm DIN 41612 Four Rows Straight Connector


SPECIFICATIONS



Current Rating: 3.0AMP
 Contact Resistance: 30m Ω Max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage :1000V AC/Minute
 Operation Temperature: -55°C to+105°C
 Contact Material: Becu
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: LCP+30%GF

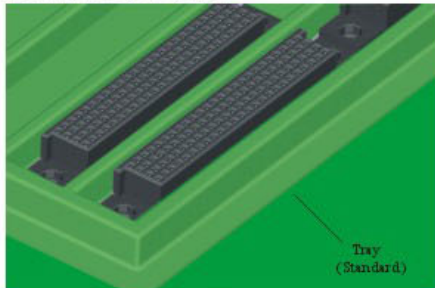


2.54mm DIN 41612 FOUR ROWS STRAIGHT FEMALE CONNECTOR

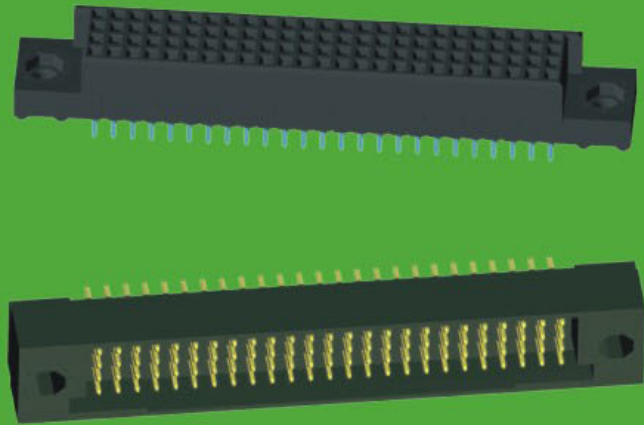

3410-4 25 B X S XX N T 1

TYPE
 F=Female
 M=Male

CONTACT PLATING	
G0:1u" Gold	S0:1u" Gold/Tin
G1:3u" Gold	S1:3u" Gold/Tin
G2:5u" Gold	S2:5u" Gold/Tin
G3:10u"Gold	S3:10u"Gold/Tin
G4:15u"Gold	S4:15u"Gold/Tin
G5:30u"Gold	S5:30u"Gold/Tin
G6:20u"Gold	S6:20u"Gold/Tin
SN: Tin	

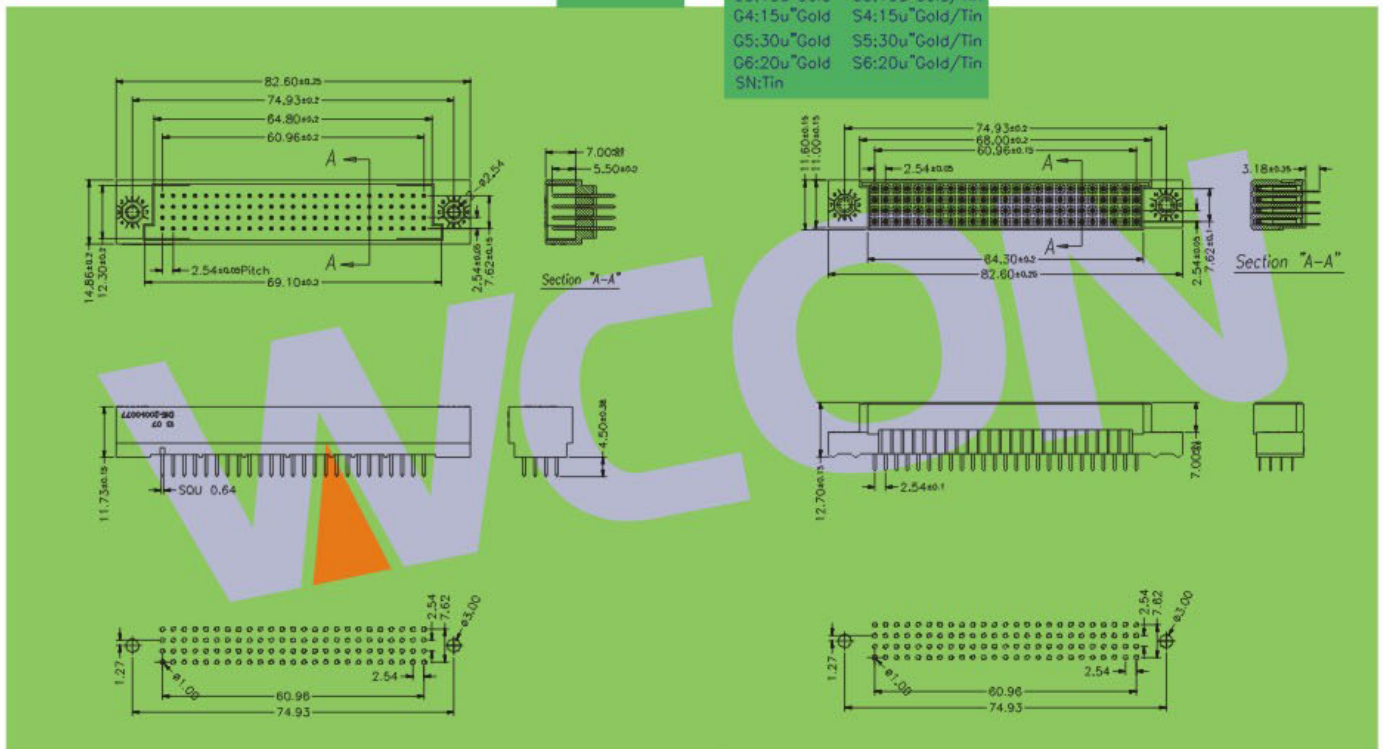

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※