


Mated with 5233 Series
 2.00 IDC Socket


2.00mm Box Header

SPECIFICATIONS


Current Rating: 1.5AMP
 Contact Resistance: 20m Ω Max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T+30%GF

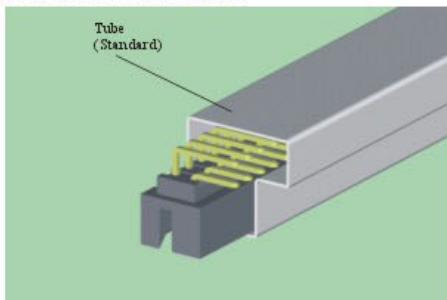


Tube
 (Standard)



3121A-XXSXXBK00X1



3121A-XXRXXBK00X1



3121A-XXMXXBK00X1

3121A-XX X XX X KXX X 1

NO. OF PINS
 02~64P




CONTACT SHAPE
 S: Straight
 M: 180° SMT
 R: Right Angle

CONTACT PLATING
 G0: 1u" Gold
 G1: 3u" Gold
 G2: 5u" Gold
 G3: 10u" Gold
 G4: 15u" Gold
 G5: 30u" Gold
 G6: 20u" Gold
 S0: 1u" Gold/Tin
 S1: 3u" Gold/Tin
 S2: 5u" Gold/Tin
 S3: 10u" Gold/Tin
 S4: 15u" Gold/Tin
 S5: 30u" Gold/Tin
 S6: 20u" Gold/Tin
 SN: Tin




INSULATOR COLOUR
 B: Black W: White
 U: Blue Y: Yellow
 R: Red G: Grey(427C)
 E: Grey(413C)

NONE OF PIN
 K05: No of fifths pin
 K00: Full Pin

PACKING
 A: Tray T: Tube
 R: Tape & Reel

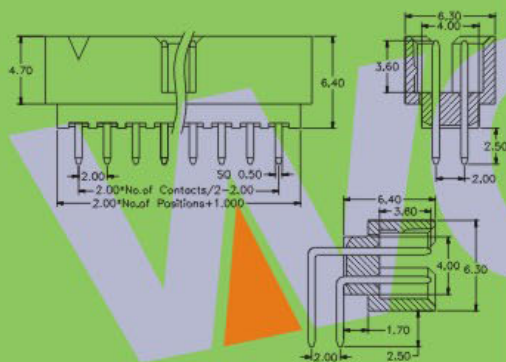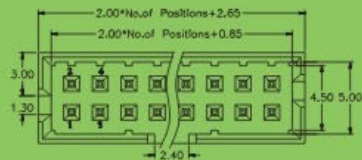

Recommended P.C.B Layout (Top Side)

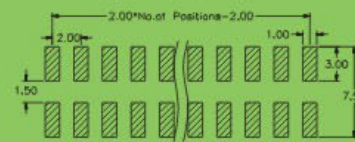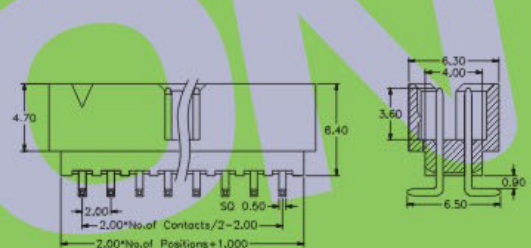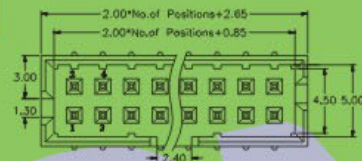

Recommended P.C.B Layout (Top Side)

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418