



Mated With 5224 Series 2.00 Type IDC Socket

2.00mm Box Header (FCI Type)

SPECIFICATIONS





Current Rating: 1.5AMP
 Contact Resistance: 20m Ω Max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T+30%GF

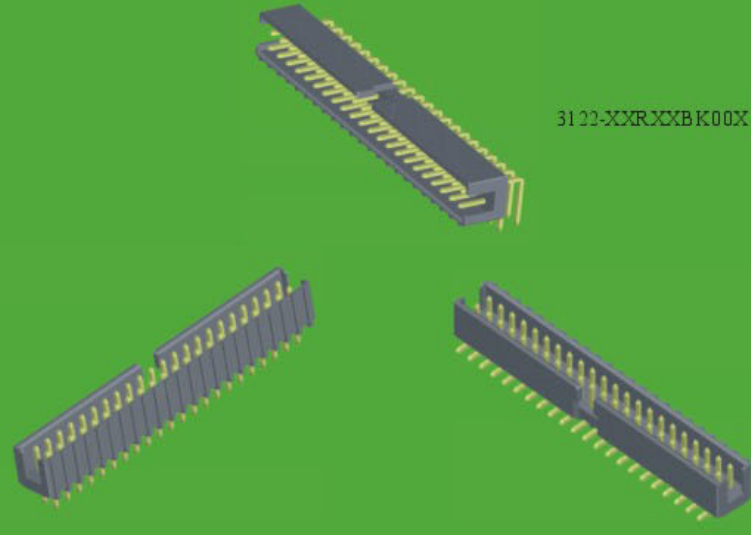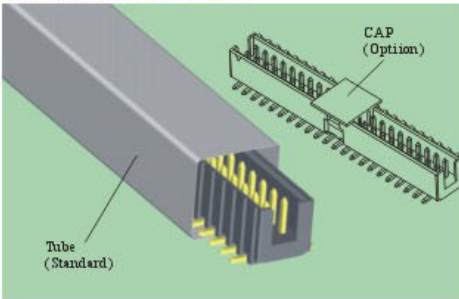

3122- XX X XX X KXX X 1

NO. OF PINS 02~64P	CONTACT SHAPE S: Straight M: 180° SMT R: Right Angle	CONTACT PLATING G0: 1u" Gold G1: 3u" Gold G2: 5u" Gold G3: 10u" Gold G4: 15u" Gold G5: 30u" Gold G6: 20u" Gold S0: 1u" Gold/Tin S1: 3u" Gold/Tin S2: 5u" Gold/Tin S3: 10u" Gold/Tin S4: 15u" Gold/Tin S5: 30u" Gold/Tin S6: 20u" Gold/Tin SN: Tin	INSULATOR COLOR B: Black W: White U: Blue Y: Yellow R: Red G: Grey (427C) E: Grey (413C)	NONE OF PIN K05: No. of fifth pin K00: Full Pin	PACKING A: Tray T: Tube R: Tape & Reel
------------------------------	--	---	---	--	---

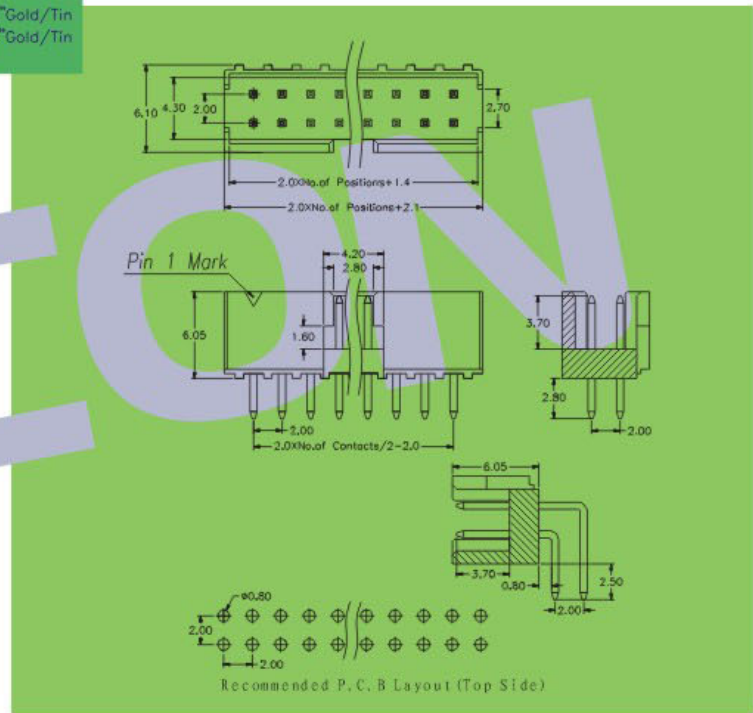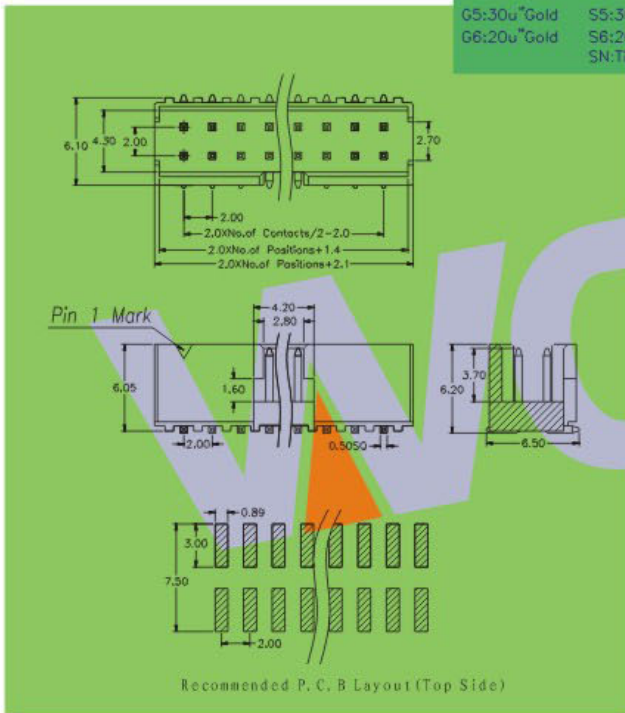

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418