



3124-XXRXXBK00X1

## 2. 00mm Box Header


### SPECIFICATIONS




Current Rating: 1.5AMP  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : 500V AC/Minute  
 Operation Temperature: -40°C to +105°C  
 Contact Material: Brass  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: LCP+30%GF

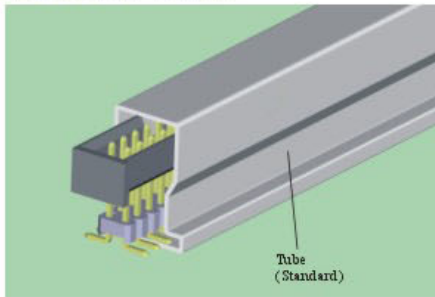


3124-XXMXXBD00X1



3124-XXMXXBK00X1




3124-XXSXXBK00X1



3124-XXSXXBD00X1

## 3124- XX X XX X XXX X 1

<b>NO.OF PINS</b> 02~64P	<b>CONTACT SHAPE</b> S: Straight M: 180°SMT R: Right Angle	<b>CONTACT PLATING</b> G0: 1u" Gold S0: 1u" Gold/Tin G1: 3u" Gold S1: 3u" Gold/Tin G2: 5u" Gold S2: 5u" Gold/Tin G3: 10u" Gold S3: 10u" Gold/Tin G4: 15u" Gold S4: 15u" Gold/Tin G5: 30u" Gold S5: 30u" Gold/Tin G6: 20u" Gold S6: 20u" Gold/Tin SN: Tin	<b>INSULATOR CLOUR</b> B: Black W: White U: Blue Y: Yellow R: Red G: Grey(427C) E: Grey(413C)	<b>NONE OF PIN</b> K05: No of fifths pin K00: Full Pin D00: With housing on face D01: With housing on inverse	<b>PACKING</b> A: Tray T: Tube R: Tape & Reel
-----------------------------	---	--	---	---	---

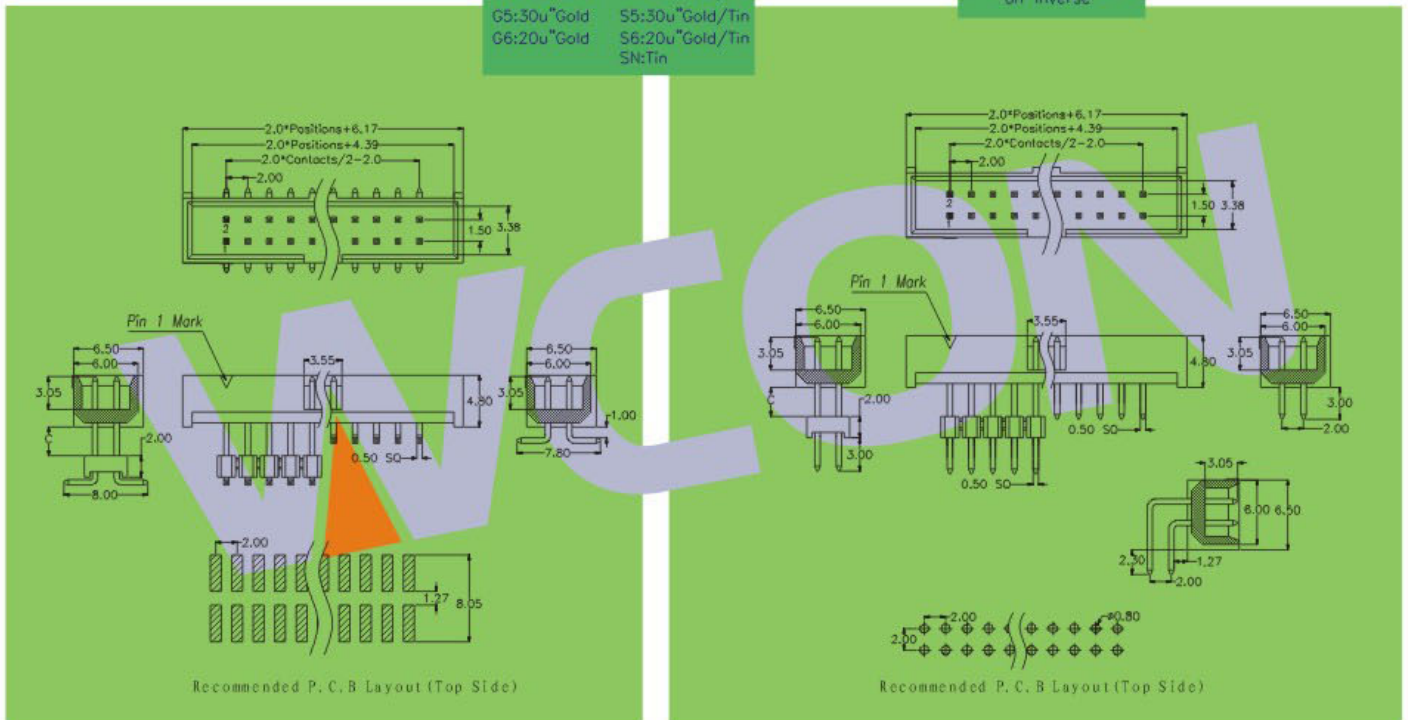

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418