

HSF

NOTES:

Current Rating: 1.5AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -40°C to +105°C





Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: PA6T+30%GF (UL94V-0)

Ordering Information

3121A-XX M XX BK00 X X

No. of Pins	Contact Plating	Color	Insulator	Packing	Series No.
10 30	G0=Gold Flash	B=Black	A=Tray	1=Type 1	
14 34	G1=3u"Gold	U=Blue	T=Tube	2=Type 2	
16 40	G2=5u"Gold	W=White	P=Tube+CAP		
20 44	G3=10u"Gold		R=Tape&RIBBL+CAP		
24 50	G4=15u"Gold				
26 60	G5=30u"Gold				

S0=Gold Flash/Tin
 S1=3u"Gold/Tin
 S2=5u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin

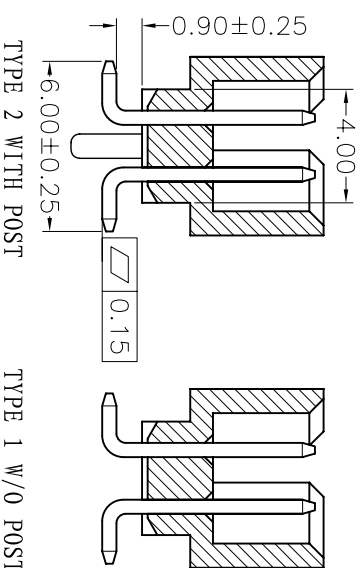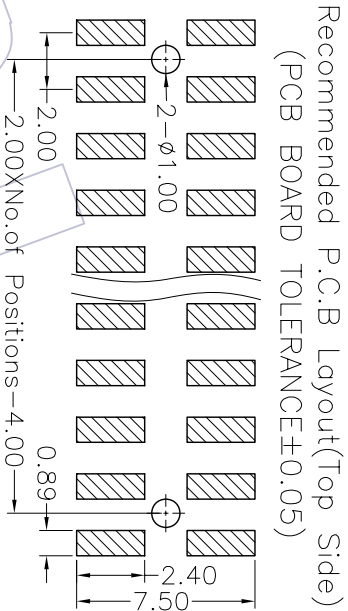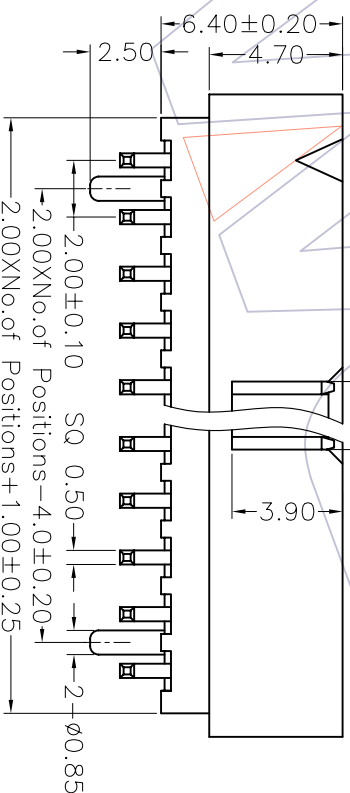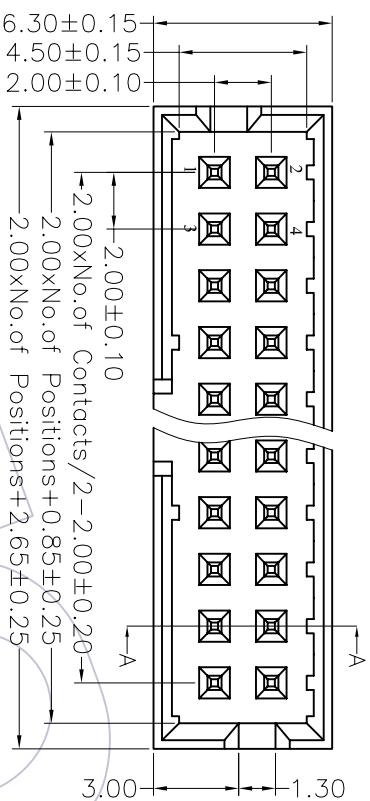

SECTION A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	PART NO.
A0	08/05/06	NEW			XXX ±0.40 XXX ±0.25 XXX ±0.15 Angle ± 3'	DESIGN CHECK	08/05/06	4:1 mm A4	3121A-XXMXXBK00XX
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	APPROVE		PROJ.	TITLE: Customer NO.
1									2.00 BOX HEADER SMT H=6.4

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD