



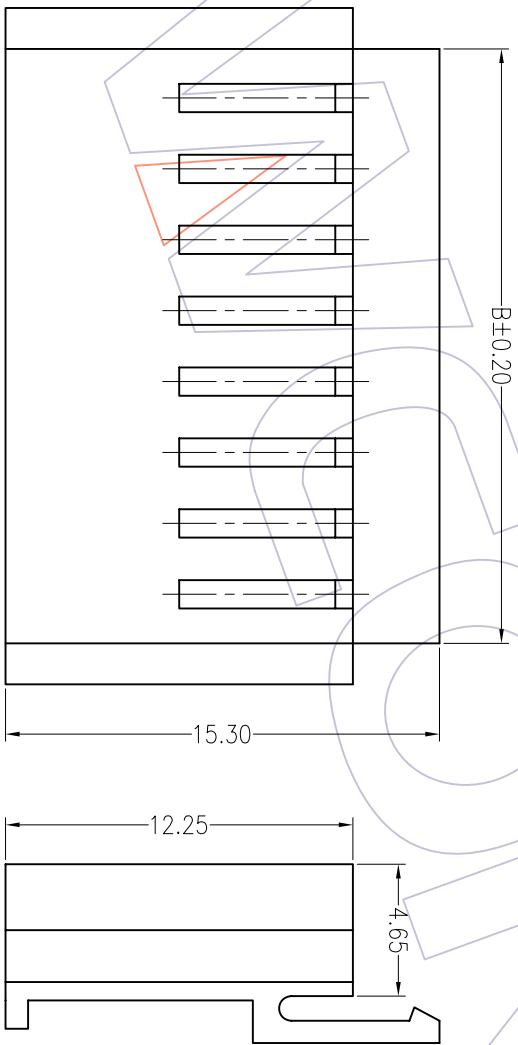

NOTES:

Rating Voltage:125V AC/DC
 Current Rating:1.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:100MΩ min
 Operation Temperature:-25°C to +85°C

Insulator Material:Nylon UL94V-0

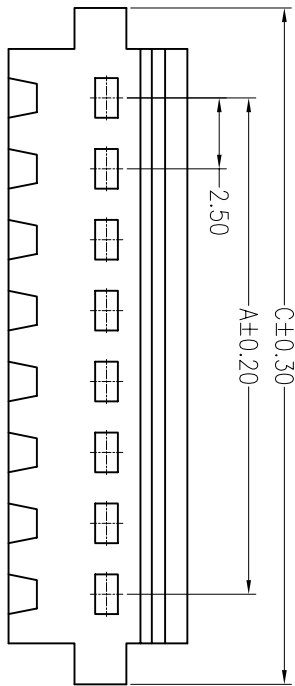

Ordering Information

WF 2508 - H XX W X 1

No. of pins
02-25pin

Color
B=Black
E=Beige
W=White

Packing
0=PE Bag
A=Tray
T=Tube

Specification & Ordering Information:

Circuit	Part No.	Dimension		
		A	B	C
02	WF2508-H02WX1	2.50	5.96	8.85
03	WF2508-H03WX1	5.00	8.46	11.35
04	WF2508-H04WX1	7.50	10.96	13.85
05	WF2508-H05WX1	10.00	13.46	16.35
06	WF2508-H06WX1	12.50	15.96	18.85
07	WF2508-H07WX1	15.00	18.46	21.35
08	WF2508-H08WX1	17.50	20.96	23.85
09	WF2508-H09WX1	20.00	23.46	26.35
10	WF2508-H10WX1	22.50	25.96	28.85
11	WF2508-H11WX1	25.00	28.46	31.35
12	WF2508-H12WX1	27.50	30.96	33.85
13	WF2508-H13WX1	30.00	33.46	36.35
14	WF2508-H14WX1	32.50	35.96	38.85
15	WF2508-H15WX1	35.00	38.46	41.35
16	WF2508-H16WX1	37.50	40.96	43.85
17	WF2508-H17WX1	40.00	43.46	46.35
18	WF2508-H18WX1	42.50	45.96	48.85
19	WF2508-H19WX1	45.00	48.46	51.35
20	WF2508-H20WX1	47.50	50.96	53.85
21	WF2508-H21WX1	50.00	53.46	56.35
22	WF2508-H22WX1	52.50	55.96	58.85
23	WF2508-H23WX1	55.00	58.46	61.35
24	WF2508-H24WX1	57.50	60.96	63.85
25	WF2508-H25WX1	60.00	63.46	66.35

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

OPERATION	OPERATION	DRAW	2011.04.06	08.08.06	SCALE	1:1
X.X	±0.30	DESIGN			UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10	APPROVE			SHEET	1/1
Angle	± 2'				PROJ.	
DIM	TOL					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/08/06	NEW		

PART NO. _____
 TITLE: 2.50mm HOUSING
 SBE TAB