HSF

NOTES:
Current Rating:1.0A
Voltage Rating:250V AC,DC
Contact Resistance:20mΩ max
Withstand Voltage:500V AC/minute
Insulation Resistance:1000MΩ min
Operation Temperature:-25℃ to +85℃

Contact Material:Phosphor Bronze
Contact plating:Au Over Ni
Insulator Material:PBT+30%G.F(UL94V-0)

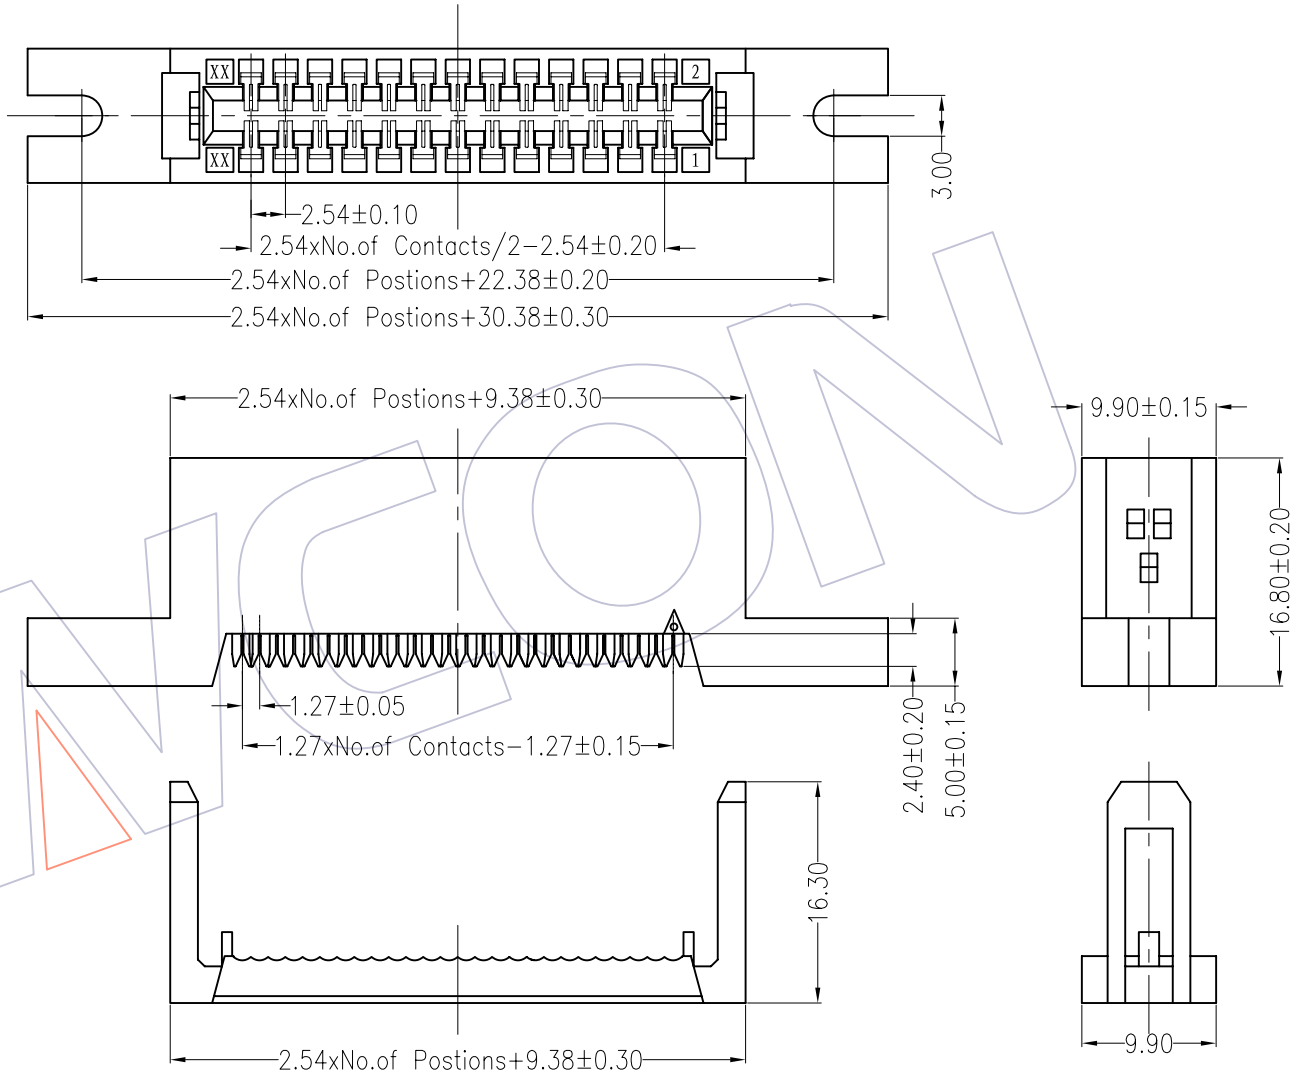

Ordering Information

5260 - XX B P XX B H X 1

No.of Pins	No.of Pins	Contact Plating	Color	Packing
10P 34P	A=With clapboard	G0=Gold Flash	B=Black	A=Tray
14P 40P	B=Without clapboard	G1=3u"Gold	U=Blue	T=Tube
16P 50P		G2=5u"Gold	G=Grey(427C)	
20P 60P		G3=10u"Gold	E=Grey(413C)	
26P 64P		G4=15u"Gold		
		G5=30u"Gold		
		S0=Gold Flash/Tin		
		S1=3u"Gold/Tin		
		S2=5u"Gold/Tin		
		S3=10u"Gold/Tin		
		S4=15u"Gold/Tin		
		S5=30u"Gold/Tin		
		SN=Tin		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/11/25	NEW		

OPERATION		DRAW	WEIXD	08.11.25
X.X	±0.40	DESIGN		
X.XX	±0.25			
X.XXX	±0.15	CHECK		
Angle	± 3°	APPROVE		
DIM	TOL			

SCALE	1:1	WCON 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO.LTD	
UNIT	mm		
SIZE	A4	PART NO.	5260-XXBPXXBHX1
SHEET	1/1	TITLE:	CE SOCKET CONNECTOR 180°
PROJ.		Customer NO.	