
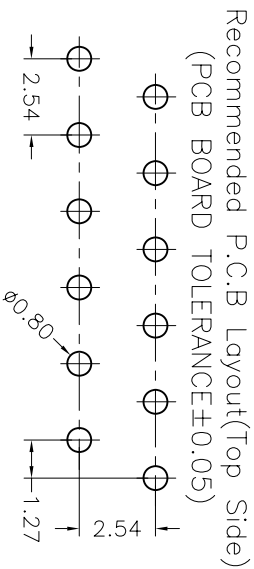


HSF

NOTES:

Rated Current:1.0A
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/Minute
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25°C to+85°C



Contact Material:Phosphor bronze
 Contact Plating:Sn over Ni
 Insulator Material:High Temperature Plastic(Ul94V-0)

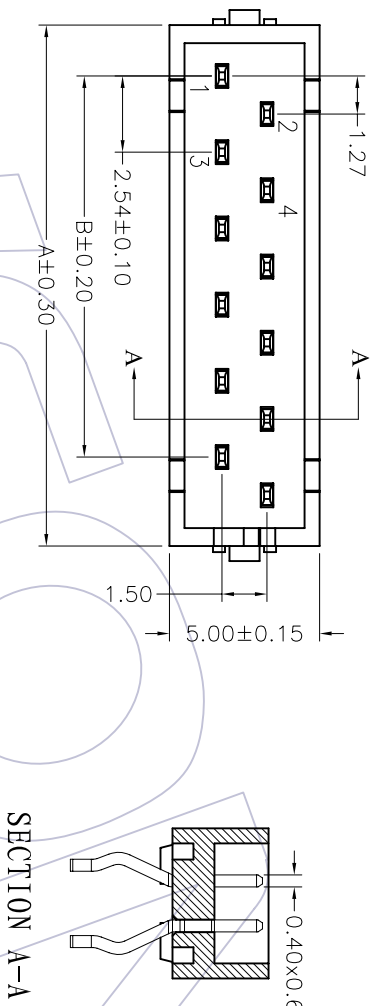

Ordering Information

3900-XX MS XX EN T 01

No. of pins	Contact Plating	Material	Packaging
04P 12P	G0=Gold Flash	A=PBT	T=Tube
06P 14P	G1=5u"Gold	C=P/A6T	
08P 16P	G2=5u"Gold	E=P/A46	
10P 18P	G3=10u"Gold		
20P	G4=15u"Gold		
	G5=30u"Gold		
	S0=Gold Flash/Tin		
	S1=5u"Gold/Tin		
	S2=5u"Gold/Tin		
	S3=10u"Gold/Tin		
	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		
	SN=Tin		

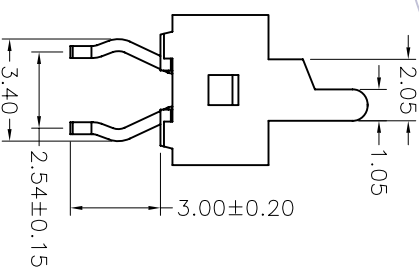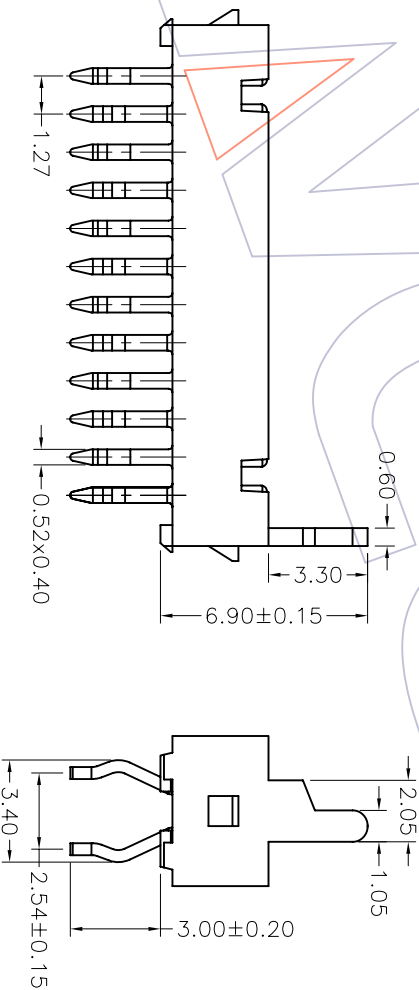

Dimensional & Ordering Information

Circuit	Part No.	Dimension		Q'TY /Tube
		A	B	
04	3900-04MSSSENT01	7.20	2.54	71 pcs
06	3900-06MSSSENT01	9.74	5.08	54 pcs
08	3900-08MSSSENT01	12.28	7.62	44 pcs
10	3900-10MSSSENT01	14.82	10.16	37 pcs
12	3900-12MSSSENT01	17.63	12.70	31 pcs
14	3900-14MSSSENT01	19.90	15.24	28 pcs
16	3900-16MSSSENT01	22.44	17.78	25 pcs
18	3900-18MSSSENT01	24.98	20.32	22 pcs
20	3900-20MSSSENT01	27.52	22.86	20 pcs

WCON 维峰五金电子有限公司
 WAFER HARDWARE ELECTRONICS CO. LTD

PART NO. SEE TAB

TITLE: Micro Match Box Header 180° DIP

CUSTOMER NO.

OPERATION	DRAW	WEIXD	SCALE
XX ±0.25	DESIGN	08/08/18	1:1
XXX ±0.15	CHECK		mm
XXX ±0.10	CHECK		A4
Angle ± 3'	CHECK		1/1
DIM TOL	APPROVE		PROJ.

MODIFICATION DESCRIPTION

REV	DATE
A0	08/08/18

1 2 3 4 5 6 7 8 9 10