


HSF

NOTES:

Rated Current:1.0A
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/Minute
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25°C to+85°C

Contact Material:Phosphor bronze
 Contact Plating:Sn over Ni
 Insulator Material:High Temperature Plastic(UL94V-0)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

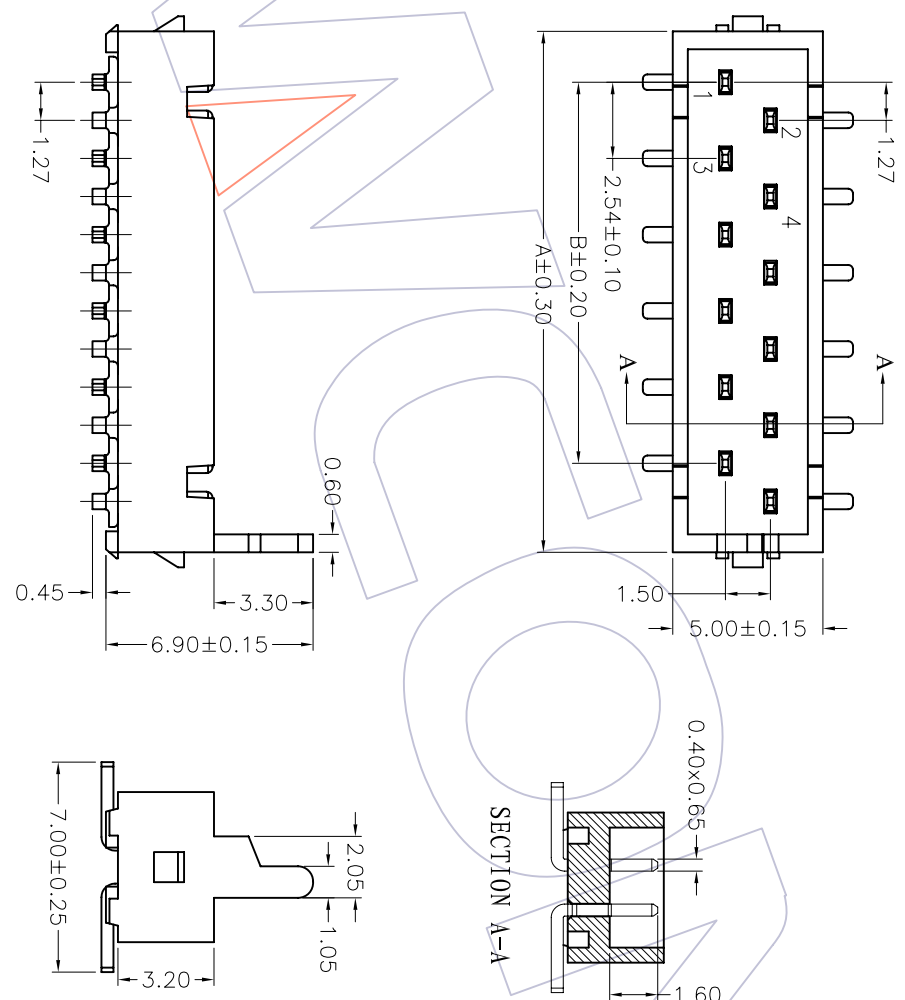

Ordering Information

3900-XX MM XX EN T 01

- No. of pins: 04P 12P, 06P 14P, 08P 16P, 10P 18P, 20P
- Contact Plating: A=Gold Flash, G1=3u"Gold, G2=5u"Gold, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
- Material: A=PBTF, C=PA6T, E=PA46
- Packaging: T=Tube
- SN=Gold Flash/Tin, S1=3u"Gold/Tin, S2=5u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin

Dimensional & Ordering Information

Circuit	Part No.	Dimension		Q'TY /Tube
		A	B	
04	3900-04MMSNENT01	7.20	2.54	71pcs
06	3900-06MMSNENT01	9.74	5.08	54pcs
08	3900-08MMSNENT01	12.28	7.62	44pcs
10	3900-10MMSNENT01	14.82	10.16	37pcs
12	3900-12MMSNENT01	17.63	12.70	31pcs
14	3900-14MMSNENT01	19.90	15.24	28pcs
16	3900-16MMSNENT01	22.44	17.78	25pcs
18	3900-18MMSNENT01	24.98	20.32	22pcs
20	3900-20MMSNENT01	27.52	22.86	20pcs

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

PART NO. SBE TAB
 TITLE: Micro Match Box Header SMT

OPERATION	DRAW	WEIXD	SCALE	PART NO.
X.X	DESIGN	08/08/18	1:1	
X.XX	CHECK		mm	
X.XXX	CHECK		A4	
Angle	CHECK		1/1	
± 3'	APPROVE		PROJ.	Customer NO.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.
A0	08/08/18	NEW					