
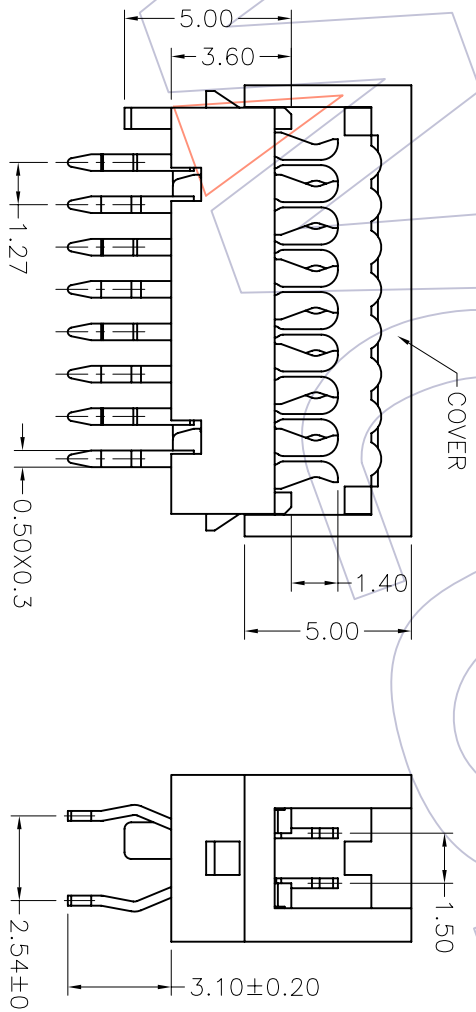
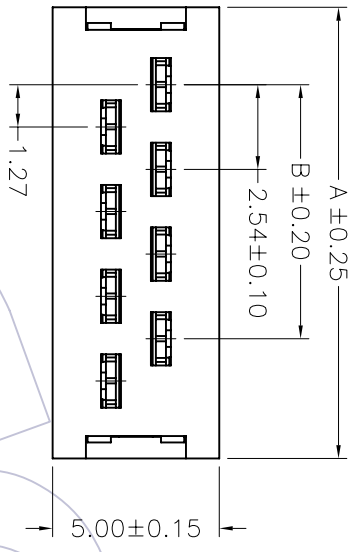


HSF

NOTES:

Rated Current:1.0A
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/Minute
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25℃ to+85℃

Contact Material:Phosphor bronze
 Contact Plating:Sn over Ni
 Insulator Material:High Temperature Plastic(UL94V-0)

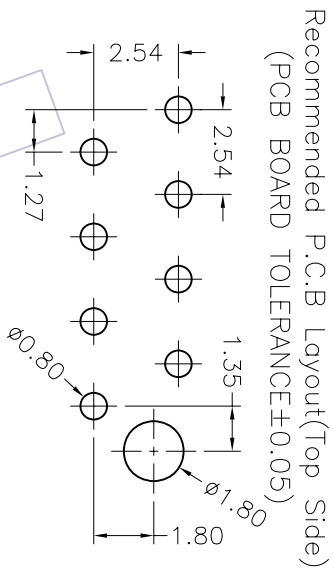

Ordering Information

3900-XX MI XX EN T 01

No. of pins: 04P 12P, 06P 14P, 08P 16P, 10P 18P, 20P

Contact Plating: G0=Gold Flash, G1=5u"Gold, G2=5u"Gold, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold

Color: A=PBT, C=PA&T, E=PA46

Packing: T=Tube

SN=Gold Flash/Tin, S1=3u"Gold/Tin, S2=5u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin

Dimensional & Ordering Information

Circuit	Part No.	Dimension		Q'ty /Tube
		A	B	
04	3900-04MISNENT01	8.45	2.54	69pcs
06	3900-06MISNENT01	10.99	5.08	53pcs
08	3900-08MISNENT01	13.53	7.62	43pcs
10	3900-10MISNENT01	16.07	10.16	36pcs
12	3900-12MISNENT01	18.61	12.70	31pcs
14	3900-14MISNENT01	21.15	15.24	27pcs
16	3900-16MISNENT01	23.69	17.78	24pcs
18	3900-18MISNENT01	26.23	20.32	22pcs
20	3900-20MISNENT01	28.77	22.86	20pcs

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

PART NO. SBE TAB
 TITLE: Micro Match DIP Plug (IDC TYPE)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/08/18	NEW		

OPERATION	DRAW	WEIXD	SCALE
X.X		08/08/18	1:1
X.XX	DESIGN		UNIT mm
X.XXX	CHECK		SIZE A4
Angle	APPROVE		SHEET 1/1
DIM			PROU.

OPERATION	DRAW	WEIXD	SCALE
± 0.25		08/08/18	1:1
± 0.15	DESIGN		UNIT mm
± 0.10	CHECK		SIZE A4
± 3'	APPROVE		SHEET 1/1
TOL			PROU.